


INSTRUCTIONS FOR THE FOLLOWING FIXTURES

Order	Model	Order	Model
R33211	RENO-TLSN2-DV-MCCT-MW-WH-G2(2FT)	R33214	RENO-TLSN2-DV-MCCT-MW-BK-G2(2FT)
R33212	RENO-TLSN4-DV-MCCT-MW-WH-G2(4FT)	R33215	RENO-TLSN4-DV-MCCT-MW-BK-G2(4FT)
R33213	RENO-TLSN8-DV-MCCT-MW-WH-G2(8FT)	R33216	RENO-TLSN8-DV-MCCT-MW-BK-G2(8FT)

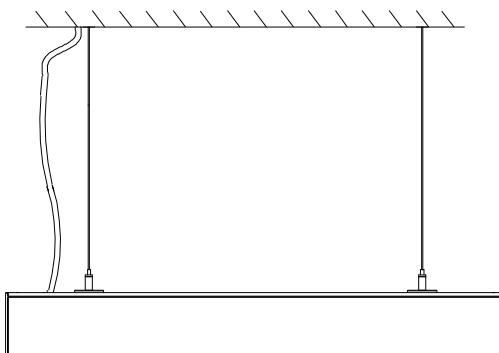

All the pictures are just for references.

Safety Information



CAUTION! Risk Of Electrical Shock




Turn off all power prior to installation by switching off circuit breaker or removing fuse at fuse box.

- This product should be installed by a certified electrician in accordance with relevant federal, state and local building and electrical codes

Common Failures & Solutions

Common Failures	Solutions
Light is out	Ensure the lamp is well connected. Ensure the switch is turned on.
Flashing	Ensure the voltage is stable. Ensure the dimmer is compatible.

Size

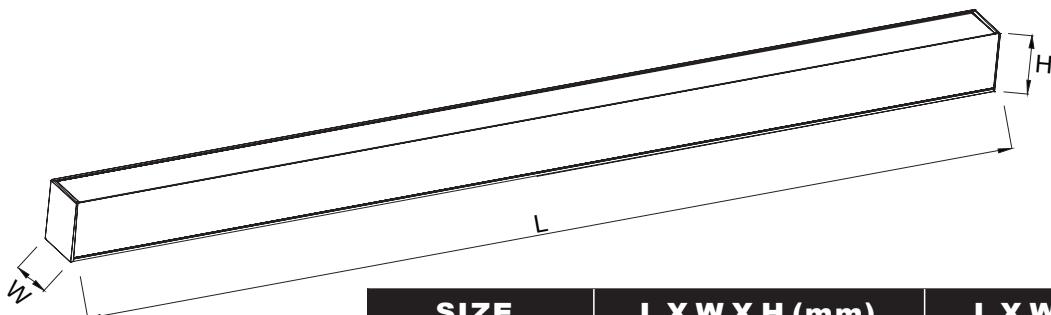

SIZE	L X W X H (mm)	L X W X H (Inch)
2FT	600 X 60 X 75 mm	24 X 2.36 X 2.95"
4FT	1200 X 60 X 75 mm	48 X 2.36 X 2.95"
8FT	2400 X 60 X 75 mm	96 X 2.36 X 2.95"



905-604-4666




info@renolighting.com




www.renolighting.com








SUSPENSION INSTALLATION

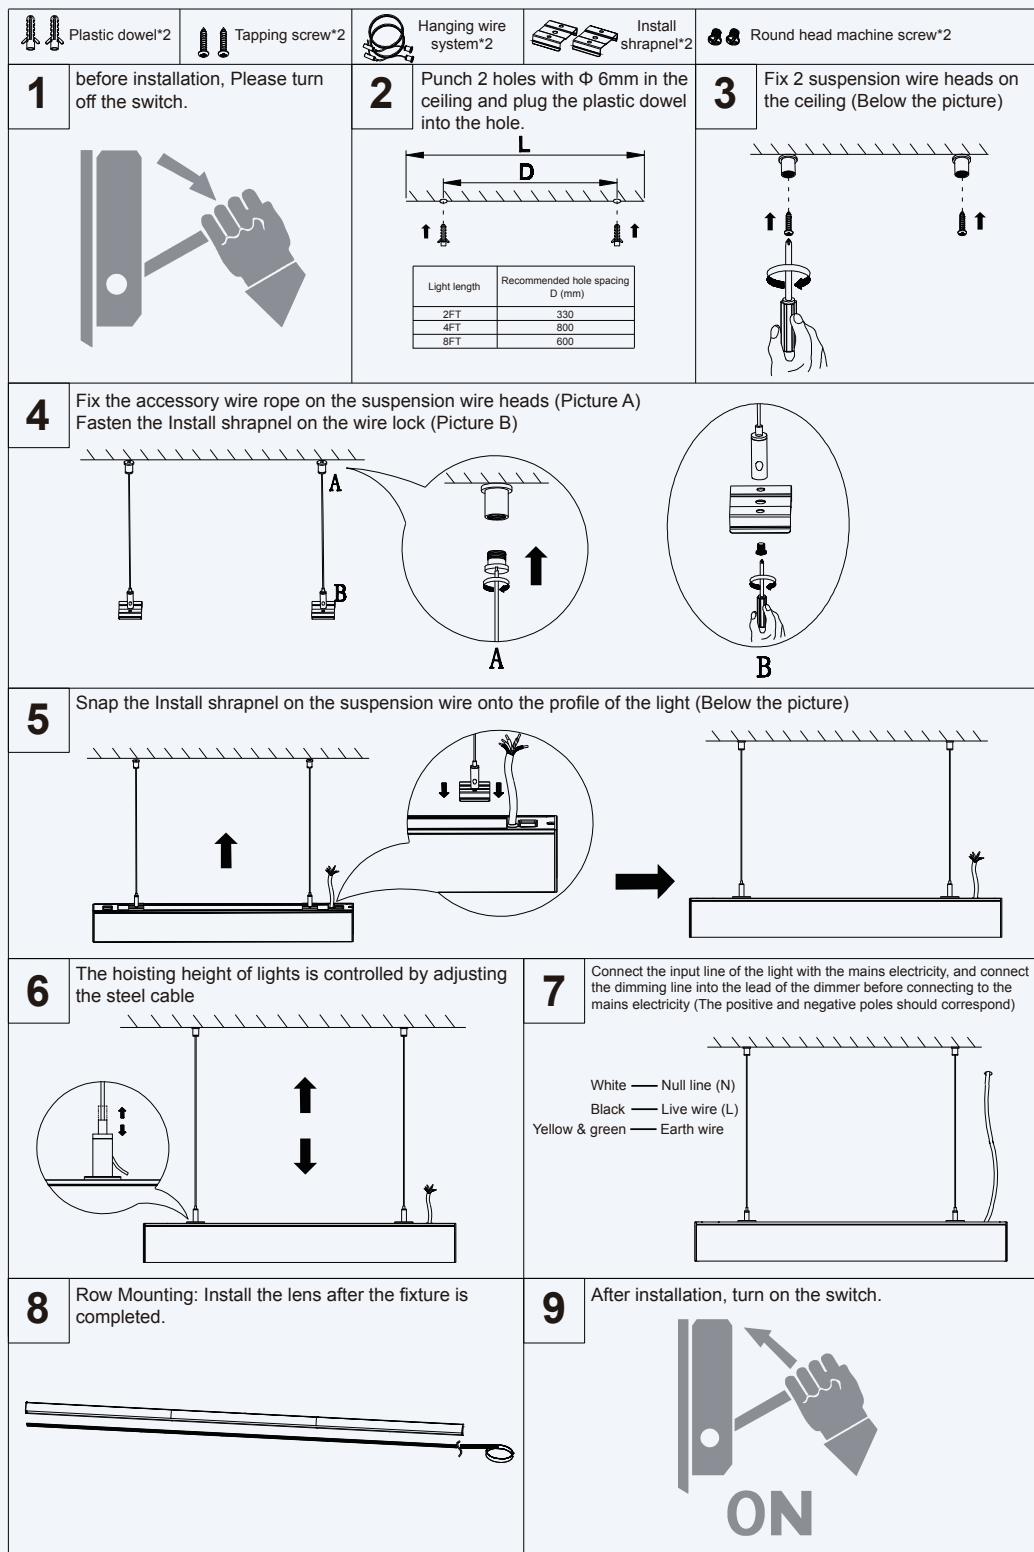


■ SUSPENSION WITH CANOPY INSTALLATION

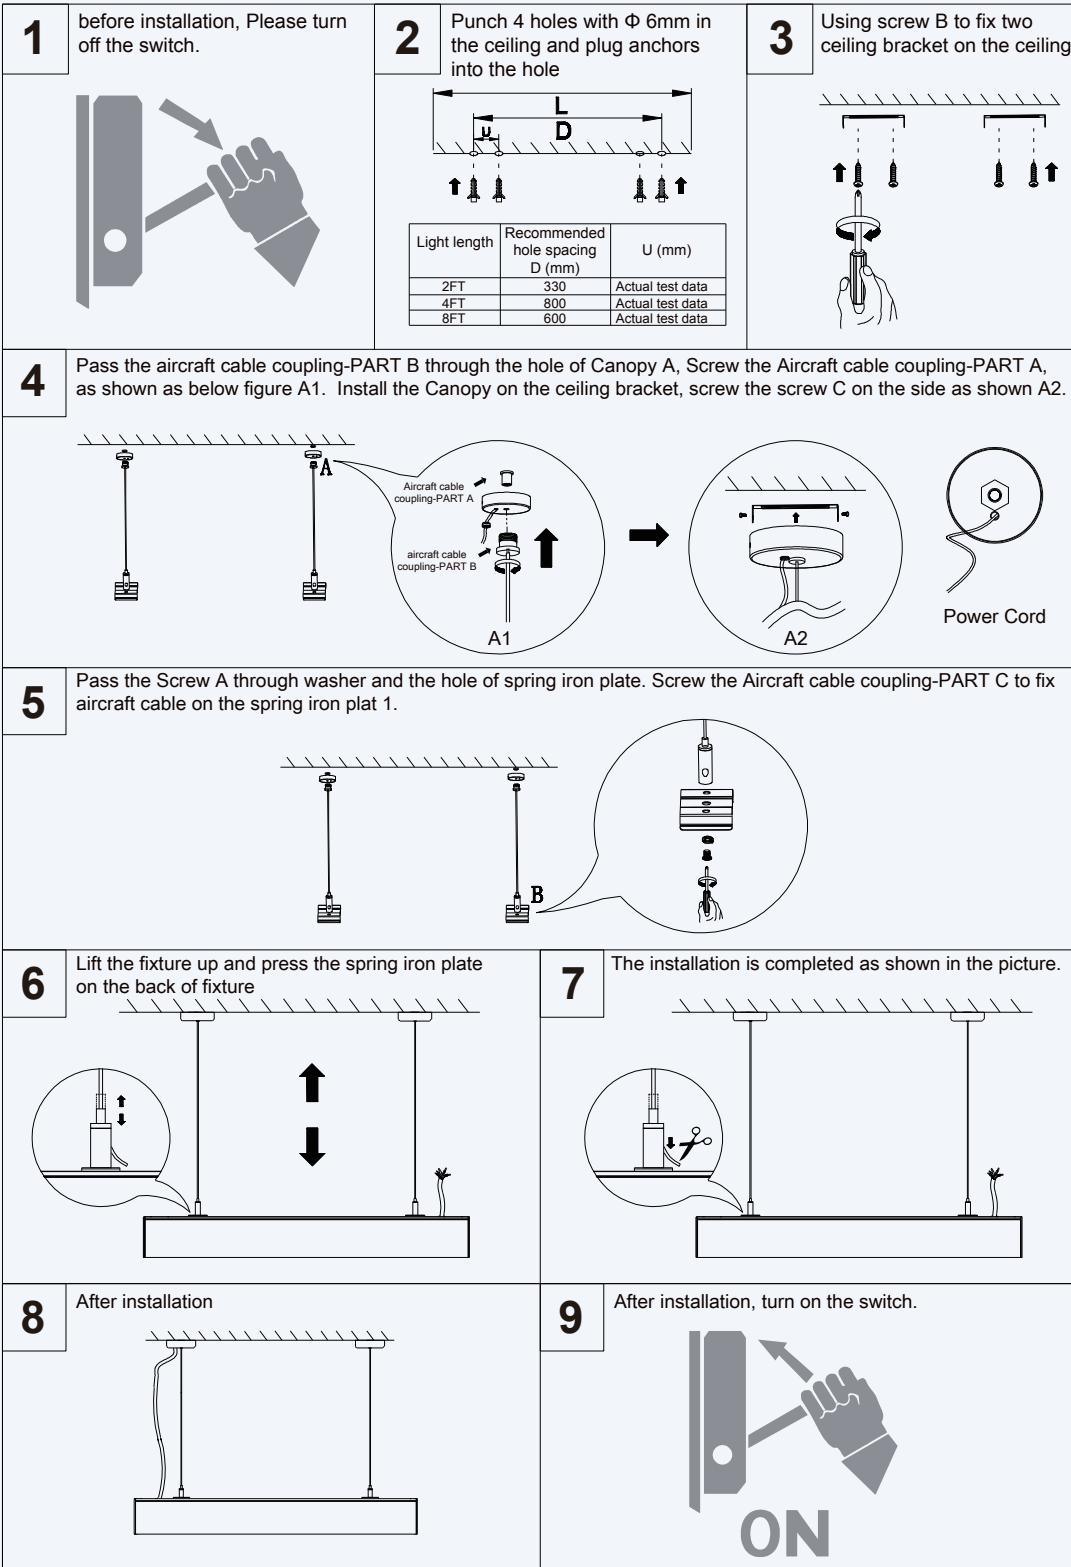

SURFACE INSTALLATION

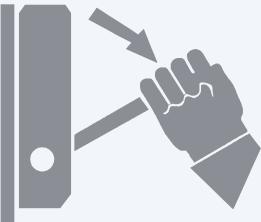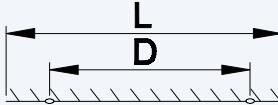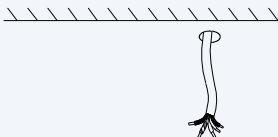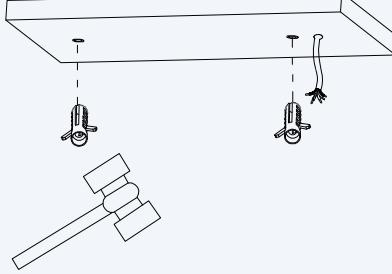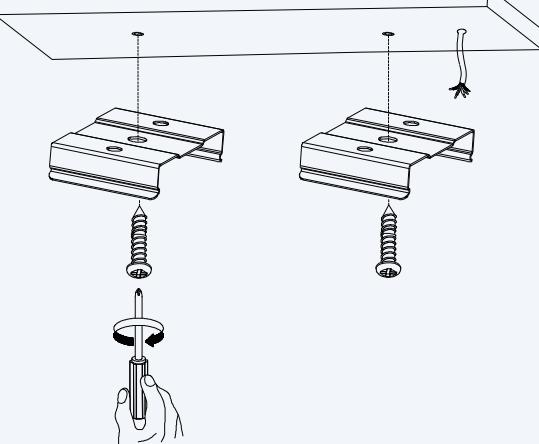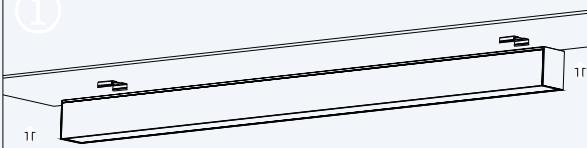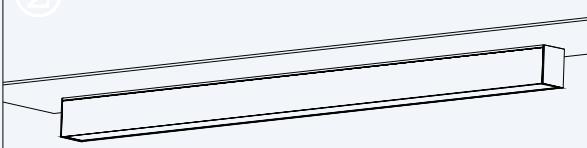 <p>Wafer Head Self Tapping Screw*2 (3PCS for 8ft strips recommended)</p>		 <p>plastic dowel*2 (3PCS for 8ft strips recommended)</p>	 <p>Install shrapnel*2 (3PCS for 8ft strips recommended)</p>									
<p>1 before installation, Please turn off the switch.</p> 	<p>2 Drill two 6mm Φ holes (three holes recommended for 8ft strips) on the ceiling and the spacing of the holes is as below picture shows.</p>  <table border="1"> <tr> <th>Light length</th> <th>Recommended hole spacing</th> </tr> <tr> <td>L (mm)</td> <td>D (mm)</td> </tr> <tr> <td>600</td> <td>330</td> </tr> <tr> <td>1200</td> <td>800</td> </tr> <tr> <td>2400</td> <td>600</td> </tr> </table>	Light length	Recommended hole spacing	L (mm)	D (mm)	600	330	1200	800	2400	600	<p>3 Lead out the mains electricity (Below the picture)</p> 
Light length	Recommended hole spacing											
L (mm)	D (mm)											
600	330											
1200	800											
2400	600											
<p>4 Insert the plastic dowel into the hole on the ceiling (Below the picture)</p> 	<p>5 String the wafer Head Self Tapping Screw into the Install shrapnel and lock it into the plastic dowel</p> 											
<p>6 Connect the line of the light to the mains electricity and dimmer wiring, and then lift the light and clip it into the installed mounting bracket</p> <p>①</p>  <p>②</p> 	<p>7 After installation, turn on the switch.</p> 											

RECESSED INSTALLATION

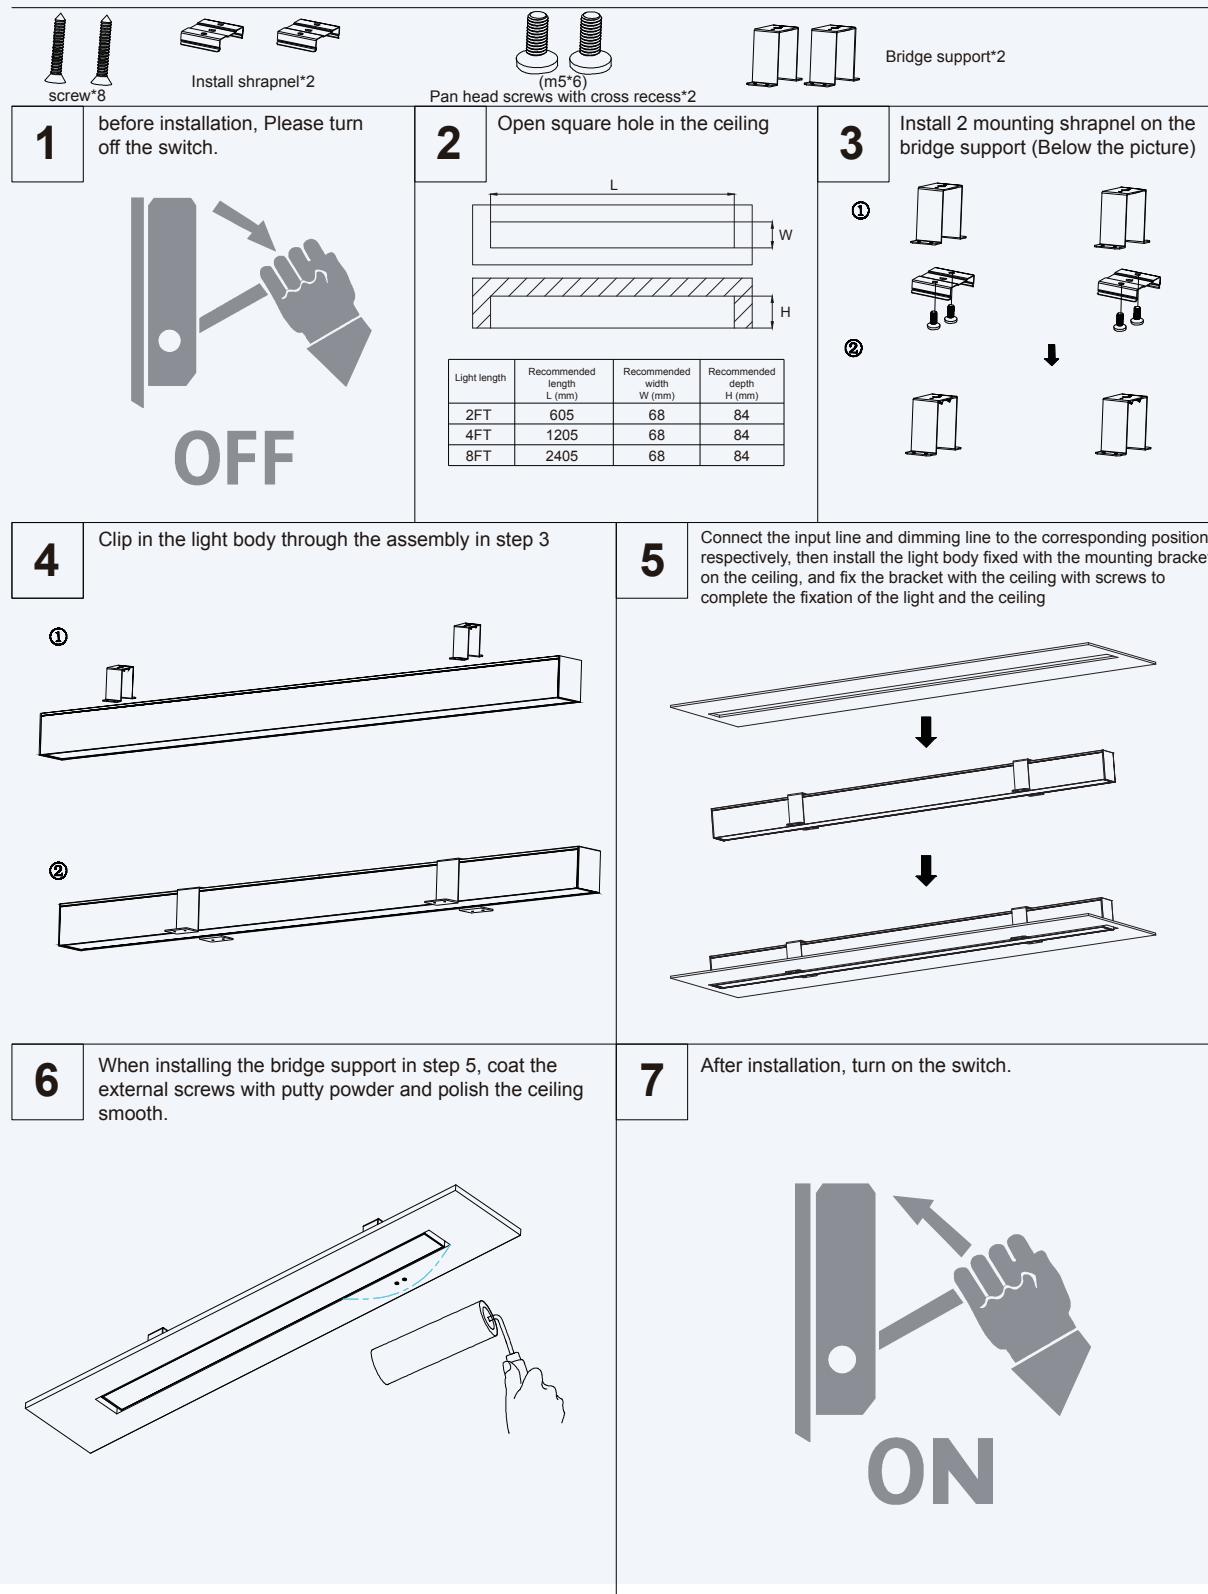

905-604-4666




info@renolighting.com




www.renolighting.com

■ WALL INSTALLATION



wall mount frame*1
junction box cover*1



pliure clips*4



mounting bracket*2



plastic dowel*4




Wafer Head Self
Tapping Screw*4


Step 1 : Before installation, please turn off the switch




**Step 2 : Punch 4 holes with 6mm on the wall,
plug the anchors into the hole, and punch one holes with 10 in the figure**

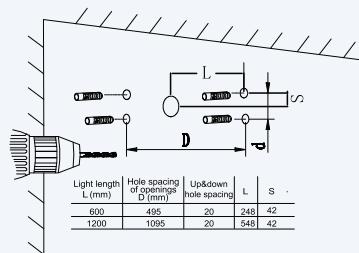


**Step 3 : Wire the extension cable to the main supply and
mount the frame on the wall through the pre-drilled holes.**

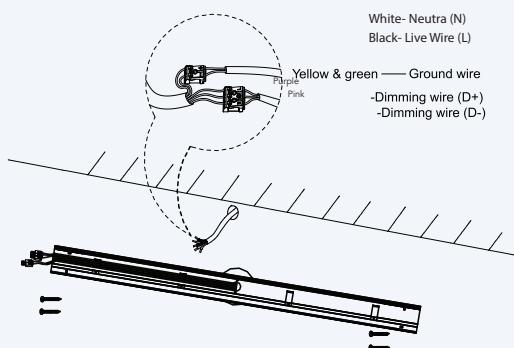


**Step 5 : Lift the Fixture upwards and clip it to the brackets.
Route the extension cable into the inside of the fixture and
quick connect with the fixture power cable.**

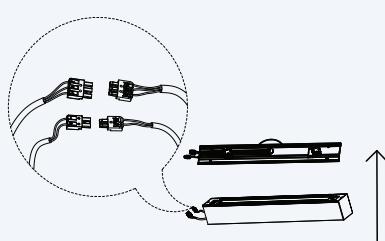

Step 4 : Slide the brackets into the frame.

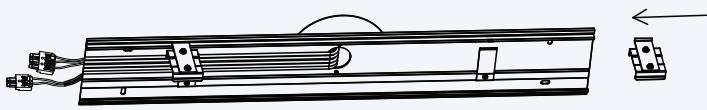

**Step 6 : Install the left end cap
as well as the right one.**

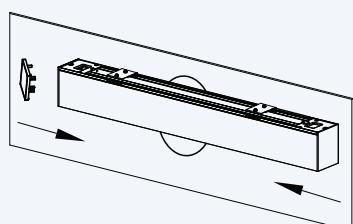

Step 7: After installation, turn off the switch



905-604-4666



info@renolighting.com




www.renolighting.com

■ UPPER LUMINOUS MODULE ASSEMBLY

Upper Luminous Module *1




Step 1 : Before installation, please turn off the switch

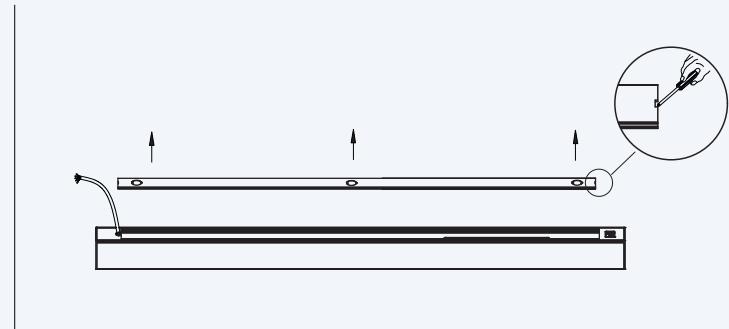


Step 2: Use a screwdriver to lift the top cover.

INSTALLATION INSTRUCTIONS:


Step 1 : Use a screwdriver to lift the top cover.

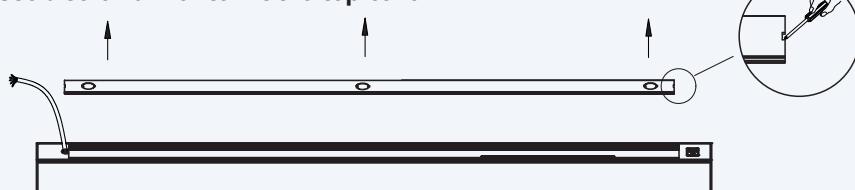

Step 2: Connect the wires one by one with quick connector.

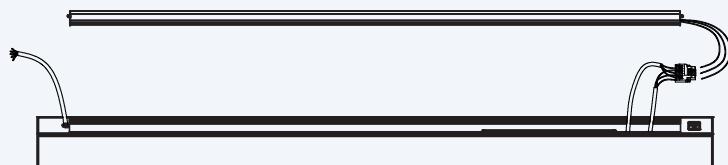

Step 3: Press to install the upper luminous module.

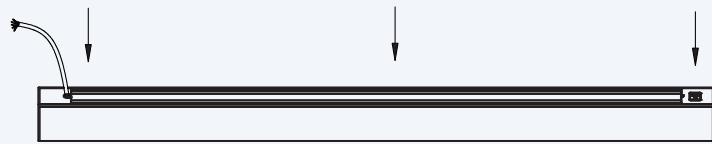

905-604-4666



info@renolighting.com



www.renolighting.com

■ CONTINUOUS INSTALLATION

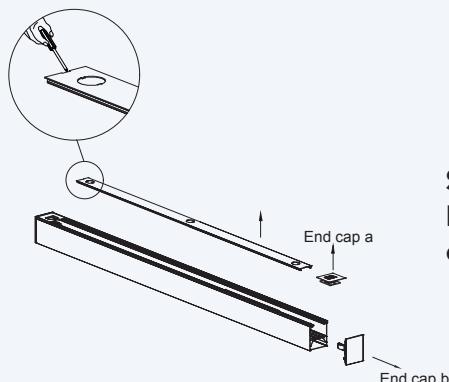


Figure 1

Step 1 : Use a screwdriver to lift the top cover; Remove the magnetic end cap a and the spring end cap b by hand, as shown the left Figure 1

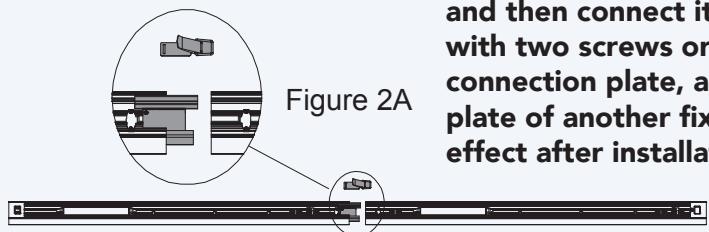


Figure 2A

Step 2: Insert H mechanical joiner into one side of fixture, and then connect it to another fixture. You can fix H with two screws or not. Put the spring buckle on the connection plate, and then buckle it on the connection plate of another fixture. As shown in Figure 2A. The effect after installation is shown in Figure 2B

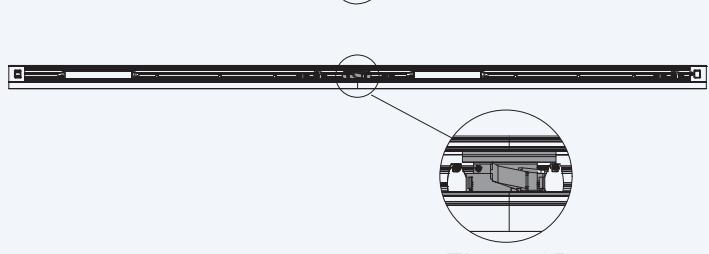


Figure 2B



Figure 3

Step 3: Pull the power cord of the fixture on the right to the fixture on the left inside of fixture body, and connect the wires one by one with quick connector. As shown in Figure 3.




Figure 4

Step 4: Put end cap A, end cap B and cover plate on



905-604-4666




info@renolighting.com




www.renolighting.com

■ "T" " " + " " L " JOINT INSTALLATION

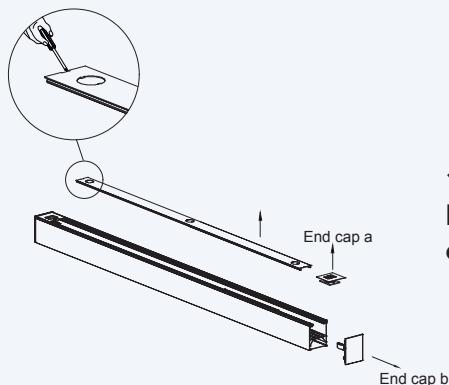


**1. Use a screwdriver to lift the top cover;
Remove the magnetic end cap a and the spring
end cap b by hand, as shown the left Figure.**

**2. Insert terminal pin to one side of fixture. And then insert H mechanical joiner into
one side of fixture. Then please connect fixture to "L" corner kit. Check if the
terminal pin is connected normally.**

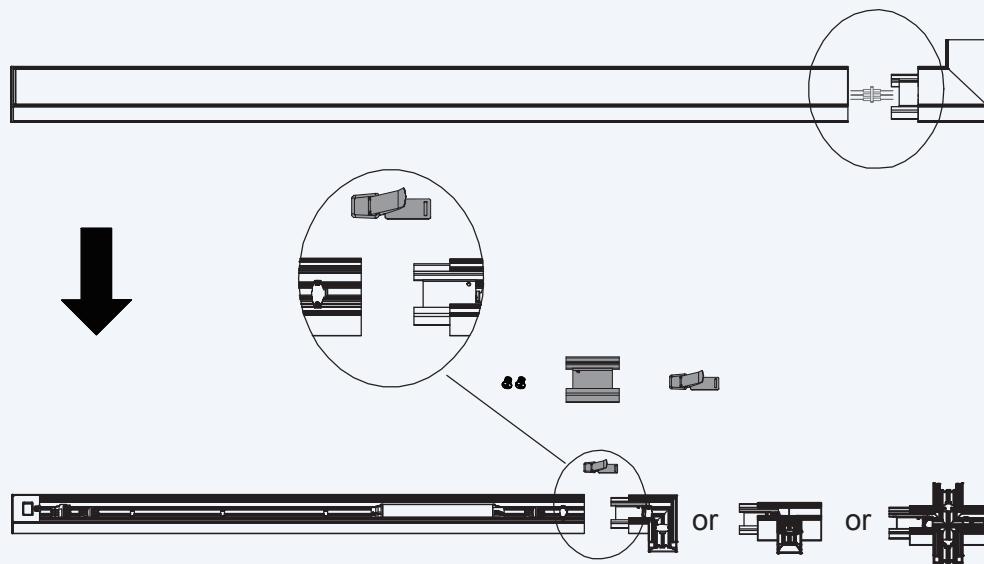

3. The other side connection is same as the last step.

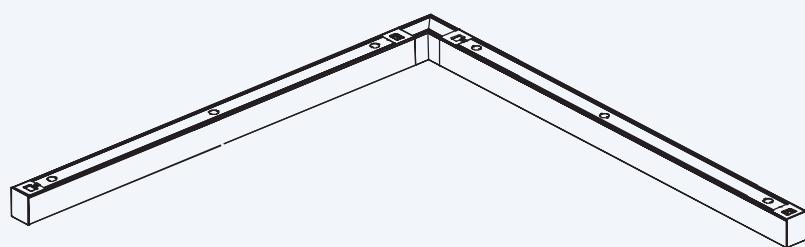

Step 4: Power cord has two ways to be connected.

Way one: Every fixture are power by its own power cord as below figure 1 shown.

Way two: Fixture connected in in series. Pull the AC line of second fixture to first fixture inside of fixture body , and connect the wires one by one with quick connector. As shown in Figure 2.

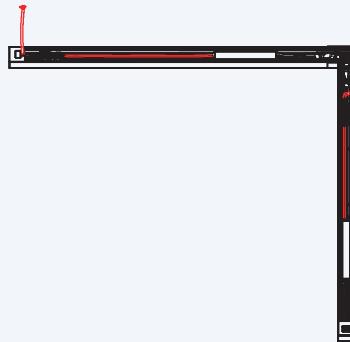


Figure 1


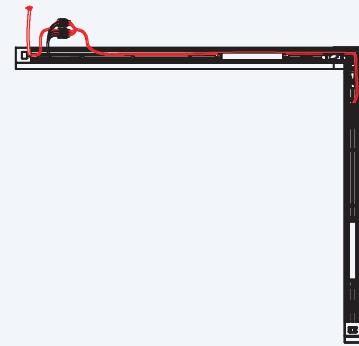



Figure 2

Step 5: Put cover plate on.

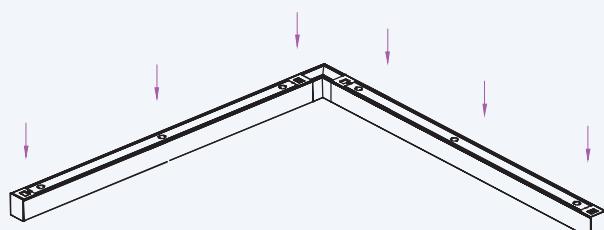


Step 6: "+"&"T" joint is same as "L".


"L" joint finished

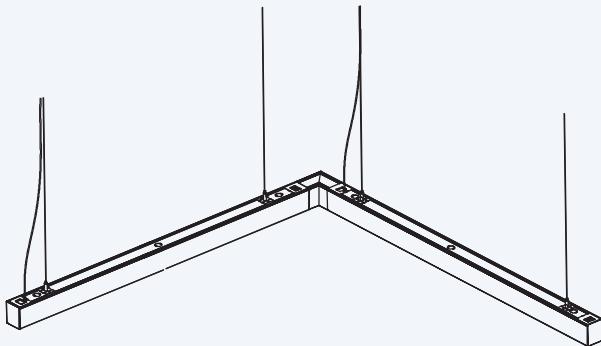

"T" joint finished

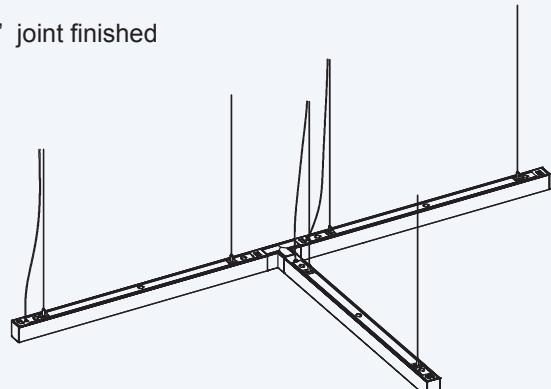

"+" joint finished

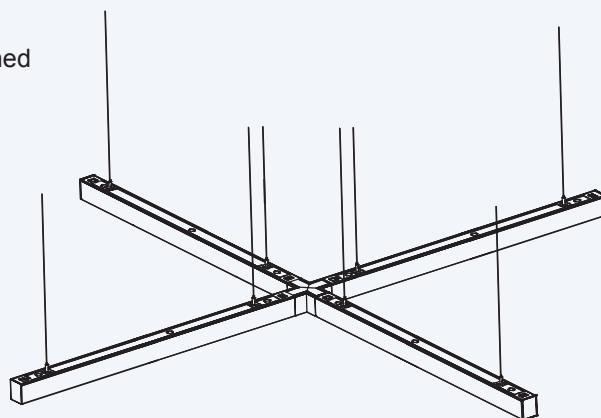

905-604-4666



info@renolighting.com



www.renolighting.com