

INSTRUCTIONS FOR THE FOLLOWING FIXTURES

ORDER#

MODEL#

R74004

FEATURES

- Remote control.
- 12 VDC Input, 0-10V Dimming
- With Daylight Harvesting and Photocell Function.



PIR INFORMATION

| | |
|---------------------|---------------------------|
| Infrared Wavelength | 5-14um |
| Output Signal Peak | ≥3500mV |
| PIR Sensitivity | 3200V/W |
| Installation Height | 15m/49.21ft Max. |
| Detection Distance | Radius :3-7m/9.84-22.96ft |
| Detection Angle | ≤120° Fersnel Lens |

Electrical Specifications

| | |
|----------------|----------------|
| Input Range | 12 VDC , >30mA |
| Stand-by power | <15mA |
| Output control | NO/OFF 0-10V |
| Working Temp | -20°C~+60°C |

Match Emergency Drivers



*Work compatibly with EM driver, please make sure it follows below conditions:

1. Switching capacity <1mA
2. LED driver' s OFF voltage at 1mA is 0.25-0.3V
3. Single fixture connected.

Sensor Parameter


| | |
|------------------------------|---|
| Warm-up Period | About 50S |
| Control Device | Remote control :R73002 or R73005 |
| Detection Area | 25%/50%/75%/100% |
| Hold Time | 5s/30s/1min/3min/5min/10min/20min/30min |
| Daylight Threshold | 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/200Lux/250Lux/300Lux/350Lux/400Lux/Disable |
| Standby Dimming Level | 10%/20%/30%/50% |
| Standby Period | 0s/10s/30s/1min/5min/10min/30min/60min/+∞ |
| Dusk/Dawn Sensing/ Photocell | 1. STANDBY DIM LEVEL as any of 10% 20% 30% 2. STANDBY PERIOD as infinite 3. DAYLIGHT as any of 30lux, 50lux, 80lux, 120lux, 200lux, 250lux 300lux, 350lux, 400lux |
| Daylight Harvesting | 1. Stay in SENSOR MODE 2. STANDBY PERIOD as OS 3. DAYLIGHT as any of 50lux, 80lux, 120lux, 200lux, 250lux, 300lux, 350lux, 400lux. 4. Press DAYLIGHT HARVESTING button to ON |

DIMENSIONS

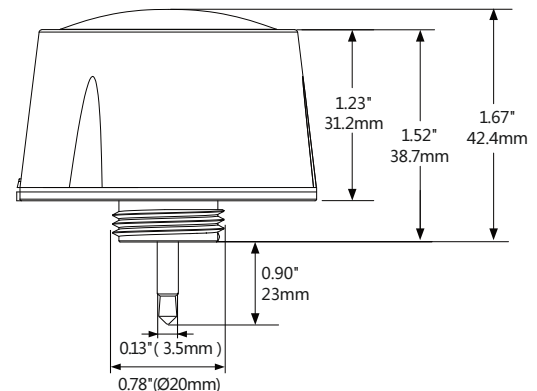
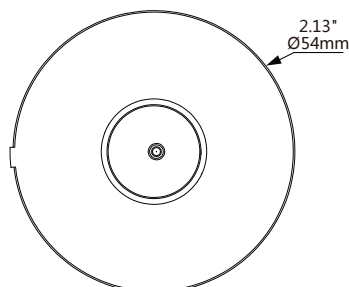


WIRING DIAGRAM

1. Black/White VCC
2. Pink GND/DIM-
3. Purple DIM+

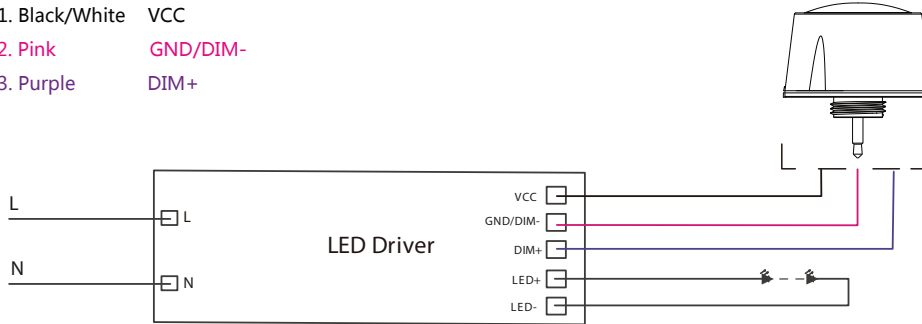

DETECTION COVERAGE



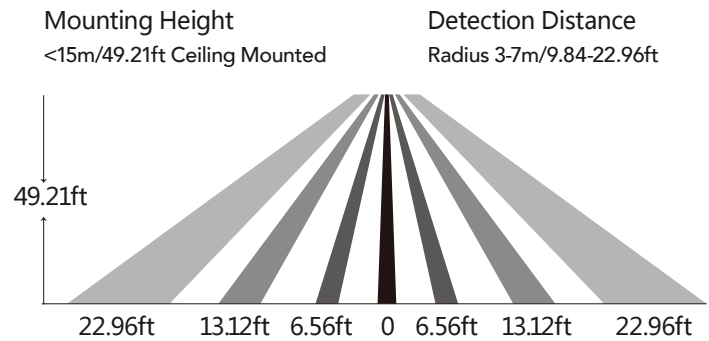
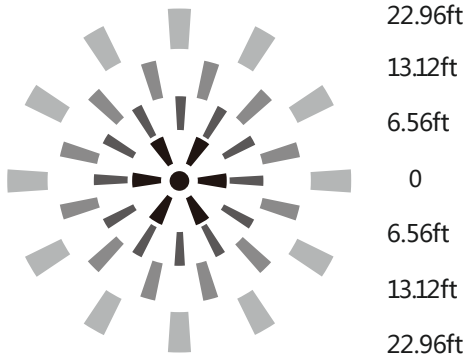


PERFORMANCE

1. Daylight Harvesting

Please follow below setting steps to perform this function:

1. Stay in SENSOR MODE
2. STANDBY PERIOD as 0S
3. DAYLIGHT as any of 50LUX, 80LUX, 120LUX, 200LUX, 250LUX, 300LUX, 350LUX, 400LUX.
4. Press DAYLIGHT HARVESTING button to ON

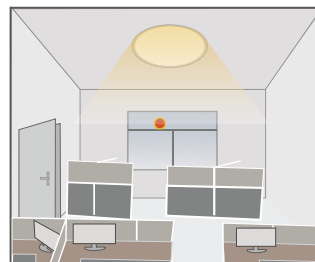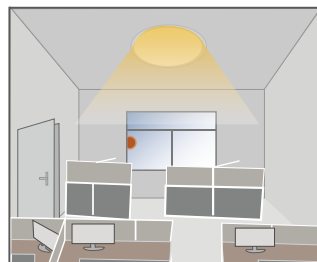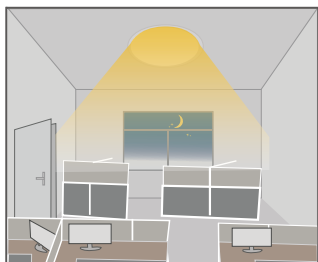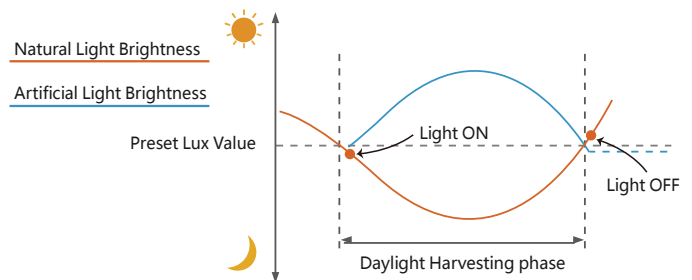

When ambient brightness is lower than preset lux level, sensor will turn on light automatically and keep dimming according to the change of the ambient brightness; when outside is getting darker, the inside will be brighter, and brighter darker.


Light OFF when ambient brightness becomes higher than the preset lux level.

2. Dusk / Dawn function


This sensor is able to differentiate artificial light brightness from natural light after installed inside the fixture, and automatically turn off light when ambient brightness exceeds preset lux level.

Please follow below setting steps to perform this function:


1. STANDBY DIM LEVEL as any of 10% 20% 30%
2. STANDBY PERIOD as infinite
3. DAYLIGHT as any of 30LUX, 50LUX, 80LUX, 120LUX, 200LUX, 250LUX, 300LUX, 350LUX, 400LUX.

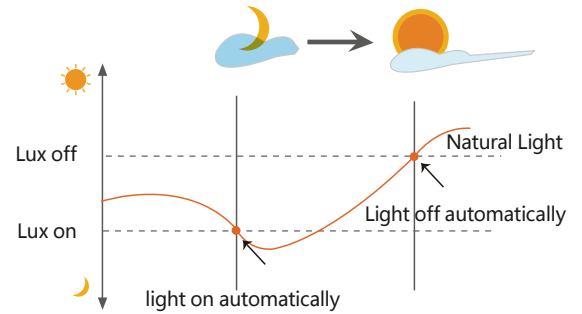


3. With Dusk/Dawn function

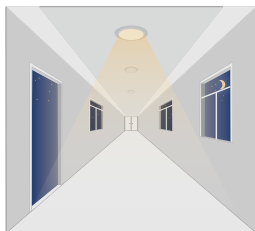


With insufficient ambient brightness, sensor turns on light and keeps it at standby dimming level even if there is no motion or presence.

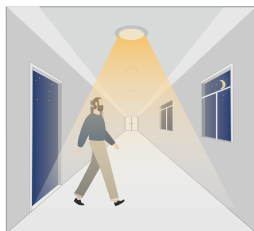


When sensor detects motion or presence it will bring the light level up to 100%.

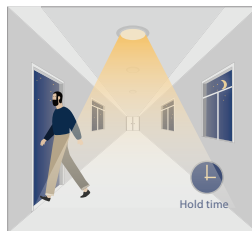

After motion is no longer detected, fixture remains at 100% for hold time.

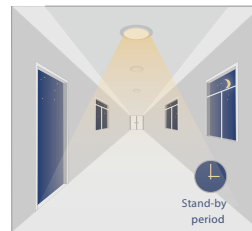


After pre-set hold time period it will dim light to standby dimming level again and always keep it.

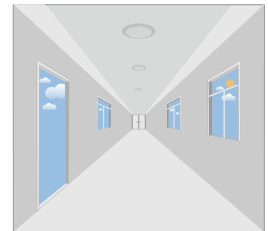


With sufficient ambient brightness, sensor will turn OFF light automatically.


4. With daylight disabled

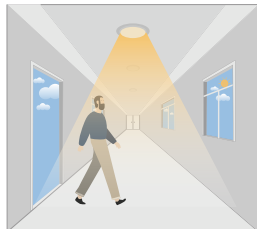


Sensor turns ON light when motion is detected.

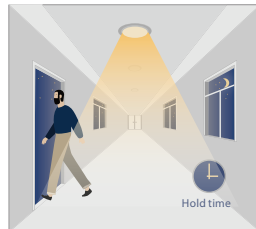

Sensor keeps for a hold time period after motion leaves

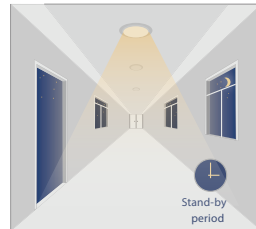


Sensor dims light to standby dimming level after hold time if there is still no motion

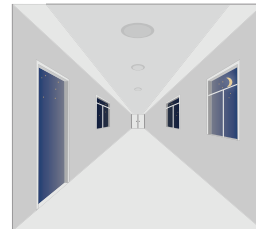


Sensor turns OFF light after standby period


5. With Daylight Threshold

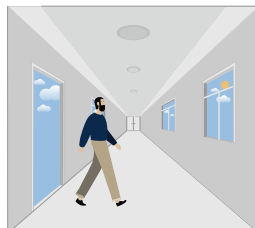


With sufficient daylight, the sensor keeps light OFF even motion gets detected

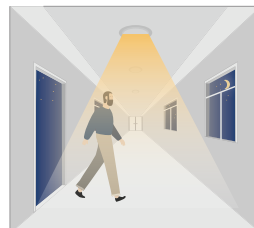


With insufficient daylight, the sensor turns light ON when motion gets detected

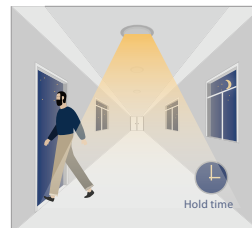

After there's no motion detected, the sensor keeps light ON 100% for holdtime.

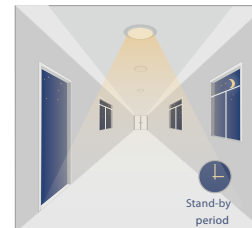

After holdtime, sensor dims light to standby dimming level for standby period. If the standby period has been set as 0s, sensor turns light OFF automatically after holdtime.

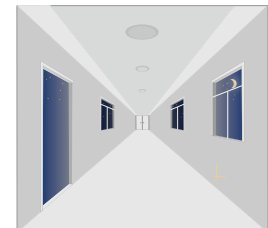

The sensor turns OFF light automatically after the standby period when there's no motion detected.



Attention

1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.

- When ambient temperature approaches the human body classic temperature range(36°C~37°C/96.8~98.6°F), PIR sensor's detecting performance will significantly weaken or non-responsive.
- When ambient temperature stays higher then 40°C/104°F, PIR sensor's detecting performance will significantly weaken.

APPLICATION NOTES

1. Suitable for indoor application, half/completely outdoor environment conditions might trigger the sensor.
2. Suitable for ceiling mount installation, adjust sensitivity properly if it's installed on side-wall because it gets more sensitive.
3. PIR sensor can't be placed inside any material, fresnel lens must completely exposed in air.
4. Fresnel lens of the PIR sensor must be lower than light fixture.
5. Not suitable environment if there's sudden changed temperature of airflow for PIR sensor.
6. Not suitable environment if there's shelves blocking between the sensor and presence area.
7. Detection area options may NOT working obviously because it works depends on fresnel lens, it's physically defined.
8. Detection distance performance works better when moving parallelly than moving towards to the sensor.
9. Daylight testing delivered in bright day without shadow or specially designed lampshade or lens.
10. Dimming performance differs when connected to different drivers; If the driver can't completely turn OFF, sensor can't either.
11. Input power voltage must be stable with float less than 10%.
12. The first time powered ON sensor, light will be ON 100% for about 50S then dims to standby level or OFF.
13. Distance detection is delivered by testing person about 165cm in open area as reference, the result differs by size and speed of moving objects, mounting height and real-life situation.