

Date		Project	
Type		Part Number	




ALL-IN-ONE PERFORMANCE LIGHTING

U-BEND T8 LAMP

Type A/B U-Bend T8 Tube

Upgrade your U-bend fluorescent tubes with the Type A&B U-Bend LED, offering the best of both worlds — plug-and-play (Type A) or ballast bypass (Type B) installation. Designed for flexibility, this high-performance LED lamp delivers instant-on, flicker-free illumination while cutting energy costs by up to 50%. Ideal for offices, retail spaces, schools, and commercial environments, it provides long-lasting brightness with a lifespan of 50,000+ hours, reducing maintenance and replacements.

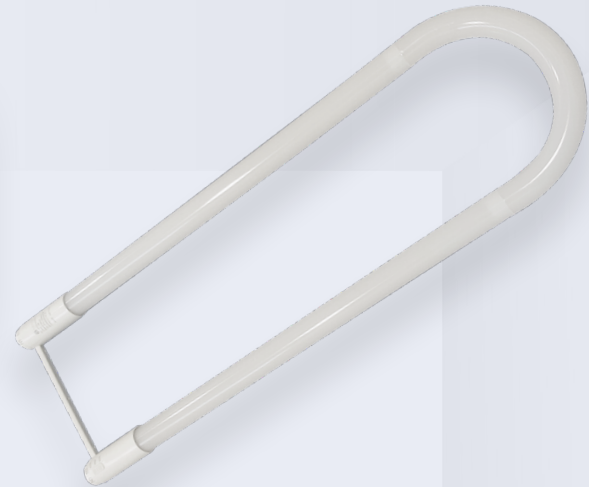

PRODUCT FEATURES

- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Replacement for Conventional Fluorescent Lamps
- Type A & B for job site convenience, compatible with most electronic instant-start, programmed-start or Ballast bypass / direct wire
- No UV or IR radiation
- High luminous efficiency
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

KEY SPECIFICATIONS

Lamp Base	G13
Size	2.0 ft
Wattage	13W
Voltage	BF / 120-277V
CCT	35/40/5000K
Lumens	Up to 1,900 lm
CRI	>83
Beam Angle	330°
Lifespan	50,000 hrs
Dimming	No




SPECIFICATIONS

Order#	Model	Size	Wattage	Voltage	CCT	Lumens	Beam Angle
R43004	WLL-LED13T8U-AB-MCCT	2 ft	13W	BF/120-277V	35/40/5000K	1,900 lm	330°

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R43004	WLL-LED13T8U-AB-MCCT	Dual Mode Internal Driver (UL Type A and Type B)	S-LFEK50	–

ACCESSORIES – MOUNTING



RENO-S-SN-U-PBT
Low profile rotary lock
T8 socket

Order#	Model	Description
R39301	RENO-LBH-HPM	Low profile rotary lock T8 socket

DIMENSIONS

TYPE A & BU-SHAPE T8

Full Body Width:	22.5" (571.5 mm)
Lens Width:	20.2" (513.1 mm)
Thickness:	1.0" (25.4 mm)
Height:	6.0" (152.4 mm)
Weight:	n/a

