

WET LOCATION RUNNING MAN SIGN INSTALLATION GUIDE

OVERVIEW

WHAT'S INCLUDED

- Emergency running man sign (R61006)
- Canopy

TOOLS REQUIRED (NOT INCLUDED)

- Wiring supplies as per national and local electrical codes
- Hardware/tools required to mount to structure (field provided)




IMPORTANT

- Before installing fixture, read all instructions and retain for future reference. The important instructions and safeguards that appear in this document are not inclusive of all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors that cannot be built into a product. These factors must be supplied by those that care and operate the fixture.


WARNING & SAFETY

- Review the diagrams thoroughly before beginning.
- All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
- Disconnect power at fuse or circuit breaker before installing or servicing.
- Do not mount in hazardous locations, or near gas or electric heaters.
- Do not let power cords touch hot surface.
- Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than intended use.
- All servicing should be performed by qualified personnel only.
- Allow battery to charge for 24 hours before first use.



FOR ADDITIONAL INFORMATION REQUIRED NOT COVERED IN THIS DOCUMENT PLEASE CONTACT A LOCAL REPRESENTATIVE!


Use Flexible Conduit Only

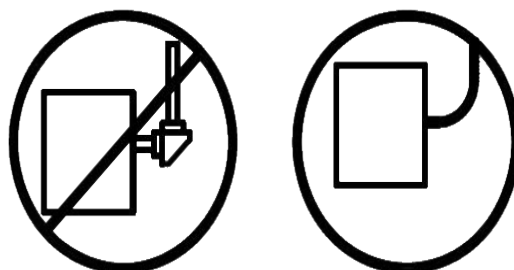


INSTALLATION METHODS

WALL MOUNT


#	Step
1	Open the RUNNING MAN housing and diffuser with a screwdriver.

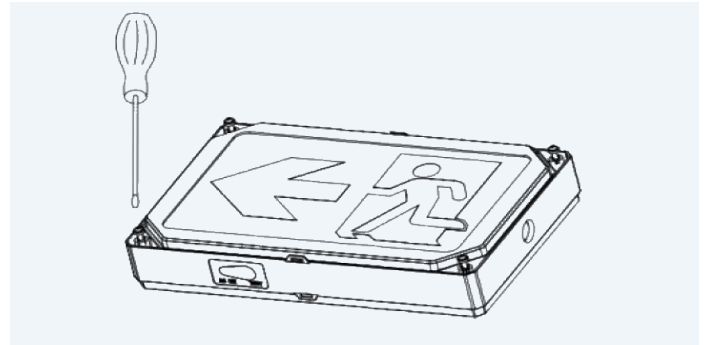

#	Step
2	Use the knockout in the back of the mounting plate and push wires through the hole.
3 (a)	Make the proper supply lead connections.
3 (b)	Connect the black and white leads to the building power supply.

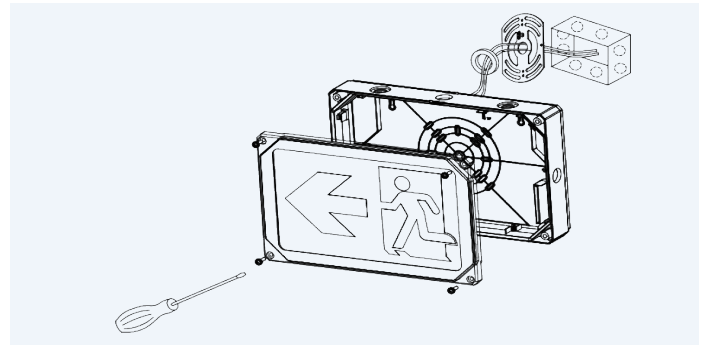


#	Step
4	Connect the battery to PCB.
5	Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.
6	Restore power and press test button. Battery powered LED will come on, AC light will turn off.

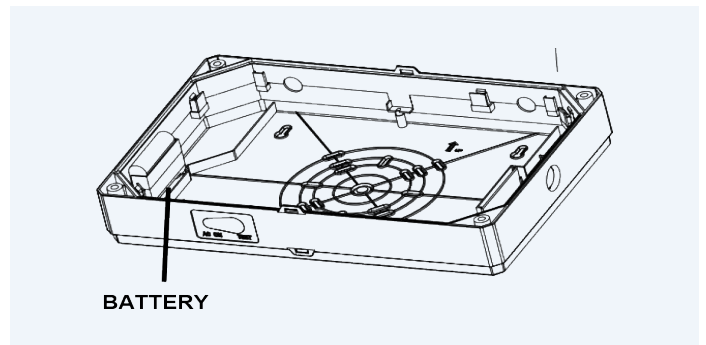

Wet Location Running Man Sign | INSTALLATION GUIDE

CEILING OR END MOUNTING

#	Step
1	Open the RUNNING MAN housing and knockout on the top of fixture.

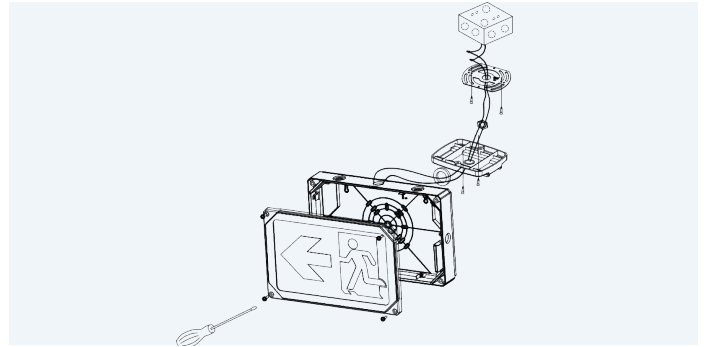

#	Step
2	Use knockout at the top or side of mounting plate and push wires through the hole.
3	Reference steps 3- 6 in wall mounting above for ceiling mounting.

