

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

# EMERGENCY Series

## Wet Location Running Man Combo

Ensure safety and compliance with this Combo Running Man Sign, an IP65 rated all-in-one solution for lighting the path of egress. Combining a highly visible illuminated exit sign with powerful emergency lighting, this combo unit eliminates the need for separate sign and lighting installations. Designed for reliability and efficiency, these signs feature long-lasting LED technology, built-in battery backup, and versatile mounting options to fit any space. Perfect for offices, schools, warehouses, and wet applications.



## PRODUCT FEATURES

- IP65 Wet Location Rated and NEMA 4X Certified
- UL-94-V0 flame retardant, fire resistant
- Push Button Test Switch / Pilot LED for AC on and charge indicator
- Surge Protection - 1800V
- Universal field-selectable single/double-face
- 3 Directional Pictograms included
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Fully-illuminated 6" characters
- High illuminance LED display
- 2 x 1.4W LED Heads
- 5 year warranty




## KEY SPECIFICATIONS

<b>Voltage</b>	120-347VAC
<b>Power</b>	4.5W
<b>Lamp Power</b>	2 x 1.4W
<b>Output Voltage</b>	3.6V
<b>Power Factor</b>	>0.9
<b>Discharge Time</b>	>120 Minutes
<b>Recharge Time</b>	24 Hours
<b>Housing</b>	Fire-resistant ABS thermoplastic body with Polycarbonate lens
<b>Finish</b>	White
<b>Applications</b>	Food-Rated Facilities, Warehouses, Parking Garages
<b>Mounting</b>	Wall, End, and Ceiling
<b>Certifications</b>	CSA C22.2 No. 141-15 performance certified

## SPECIFICATIONS – WET LOCATION RUNNING MAN COMBO

Order#	Model	Input Voltage	Output Voltage	Power	Lamp Power	Discharge Time	Charging Time	Battery Type
R61007	RENO-WRMC-U	120-347VAC	3.6V	4.5W	2 x 1.4W	>120 Minutes	24 Hours	3.6V Ni-MH

## MOUNTING

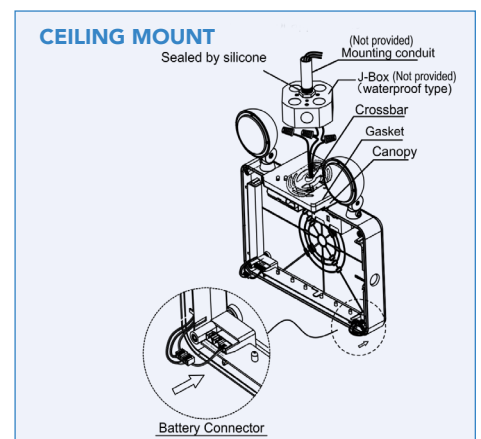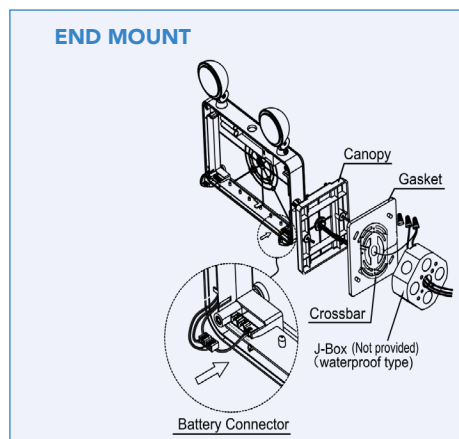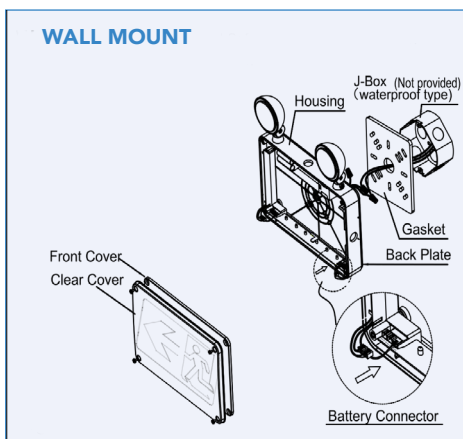

## PICTOGRAMS



LEFT



STRAIGHT (REVERSIBLE)



RIGHT

## DIMENSIONS

Width: 12.6" (320 mm)  
Depth: 2.5" (64 mm)  
Length A: 13.2" (334 mm)  
Length B: 8.1" (205 mm)  
Weight: 4.4 lbs (2 kg)

