

Date		Project	
Type		Part Number	




THE EVERYDAY COMPETITIVE OPTION

MAKO Series

Vapor Tight Fixture

Reno Lighting's ECO Vapor Tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP65 protection grade and is UL certified, making it a great lighting solution for your industrial application.

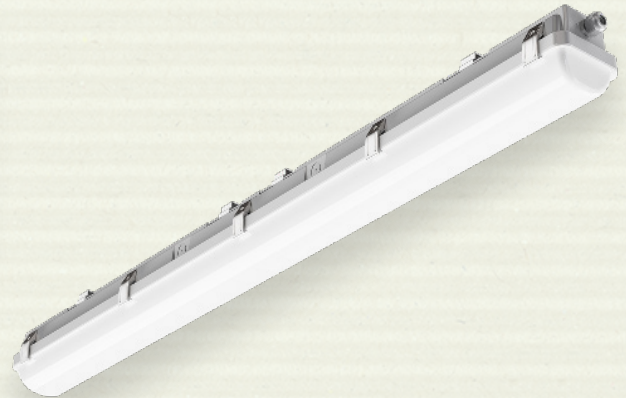

PRODUCT FEATURES

- IK Rating: IK08
- NSF & NEMA 4X Compliant
- Wet rated IP65
- Sealed housing protects against moisture, dust, and corrosive environments, ideal for wet/damp location
- Surface, Wall & Suspended Mounting options via supplied clamps inside the fixture body
- One-piece polycarbonate housing and frosted polycarbonate lens
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Rated Lifespan: L70 ~50,000 hrs
- 5 year warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable: 20/30/40W
Power Factor	>0.9
CCT	Selectable: 35/40/5000K
CRI	80
Lumens	Up to 5,536 lm
Default Fixture Setting	40W and 4000K
Beam Angle	120°
Dimming	0-10V
Mounting	Surface, Wall & Suspension
Applications	Commercial, Industrial, Warehouse



STANDALONE
SENSOR OPTIONS



EMERGENCY
BACKUP READY



RENO SMART
NLC SYSTEM




SPECIFICATIONS - 4FT 20/30/40W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33119	RENO-LVP4-DV-MW-MCCT-ECO	20W	120-347V	2,778 lm	139 lm/W	3500K
				2,871 lm	143 lm/W	4000K
				2,817 lm	141 lm/W	5000K
		30W	120-347V	3,772 lm	125 lm/W	3500K
				3,891 lm	129 lm/W	4000K
				3,753 lm	125 lm/W	5000K
		40W	120-347V	5,284 lm	132 lm/W	3500K
				5,536 lm	138 lm/W	4000K
				5,310 lm	133 lm/W	5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R33119	RENO-LVP4-DV-MW-MCCT-ECO	Direct Linear Ambient Luminaires	PENDING	–
		Low-Bay Luminaires	PENDING	–


ACCESSORIES – MOUNTING



R39204
 RENO-RP
 Suspension Kit

Order#	Model	Description
R39204	RENO-RP	Suspension Kit

ACCESSORIES – EMERGENCY BACKUP




R83004
 RENO-EM-C08
 Emergency LED Driver (100-347V AC, 50-60Hz, 8W)

Order#	Model	Description
R83004	RENO-EM-C08	Internal Mount Emergency Driver (100-347V AC, 50-60Hz, 8W)


ACCESSORIES – STANDALONE SENSORS




R74002
 RENO-SENSOR-PIR-H-EX
 PIR Sensor



R75103
 RENO-RS-JK-AD-CORD-L
 Hardwire Adjustable "L"
 Angle Adaptor for 3.5mm Jack
 Sensors



R71002
 RENO-SENSOR-MH-W
 Microwave Sensor



R74004
 RENO-SENSOR-PIR3.5-PH15M
 Long Detection Range PIR
 Sensor



R73002
 RENO-REMOTE-H
 Remote Control for Standalone
 Sensors (With Screen)
 Note: Only 1 needed per
 project.



R73005
 RENO-REMOTE-H-ECO
 Remote Control for Standalone
 sensors (Without Screen)
 Note: Only 1 needed per
 project

Order#	Model	Description
R74002	RENO-SENSOR-PIR-H-EX	PIR Sensor
R75103	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R71002	RENO-SENSOR-MH-W	Microwave Sensor
R74004	RENO-SENSOR-PIR3.5-PH15M	Long Detection Range PIR Sensor
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project


ACCESSORIES – RENO SMART NLC SYSTEM



R75001
 RENO-RS-JK-BPDN-12V
 Bluetooth PIR sensor



R75002
 RENO-RS-JK-BMWM-12V
 Bluetooth microwave sensor




R75103
 RENO-RS-JK-AD-CORD-L
 Hardwire Adjustable "L"
 Angle Adaptor for 3.5mm Jack
 Sensors



R75201
 RENO-RS-GW-BCNW
 Bluetooth Ceiling mounted
 gateway



R75301
 RENO-RS-RC-BNNN
 Bluetooth Reset remote
 controller





R75302
 RENO-RS-RC-BNNG
 Bluetooth 7-Key Smart Wall
 Switch

Order#	Model	Description
R75001	RENO-RS-JK-BPDN-12V	Bluetooth PIR sensor
R75002	RENO-RS-JK-BMWM-12V	Bluetooth microwave sensor
R75103	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R75201	RENO-RS-GW-BCNW	Bluetooth Ceiling mounted gateway
R75301	RENO-RS-RC-BNNN	Bluetooth Reset remote controller
R75302	RENO-RS-RC-BNNG	Bluetooth 7-Key Smart Wall Switch

****All Reno Smart Sensors are programmed/commissioned using our Reno Smart App**

PHOTOMETRICS - 4FT 40W/4K

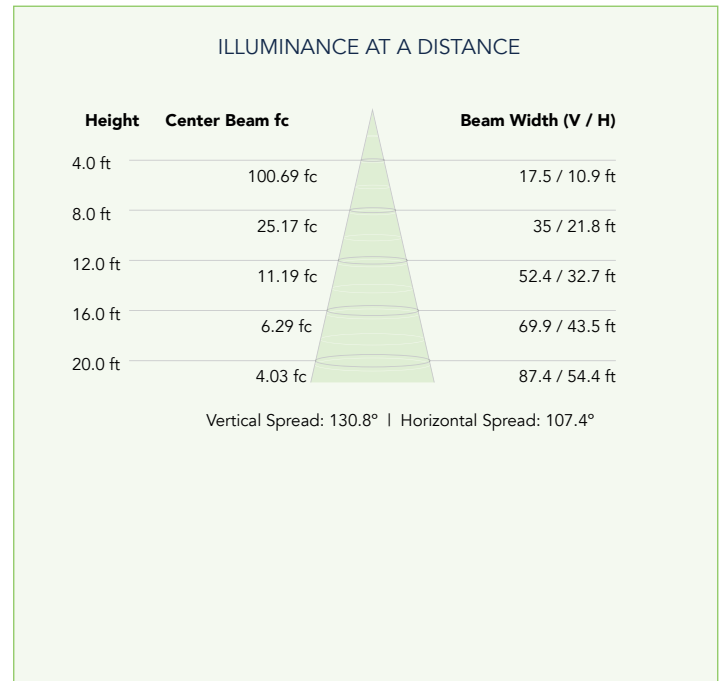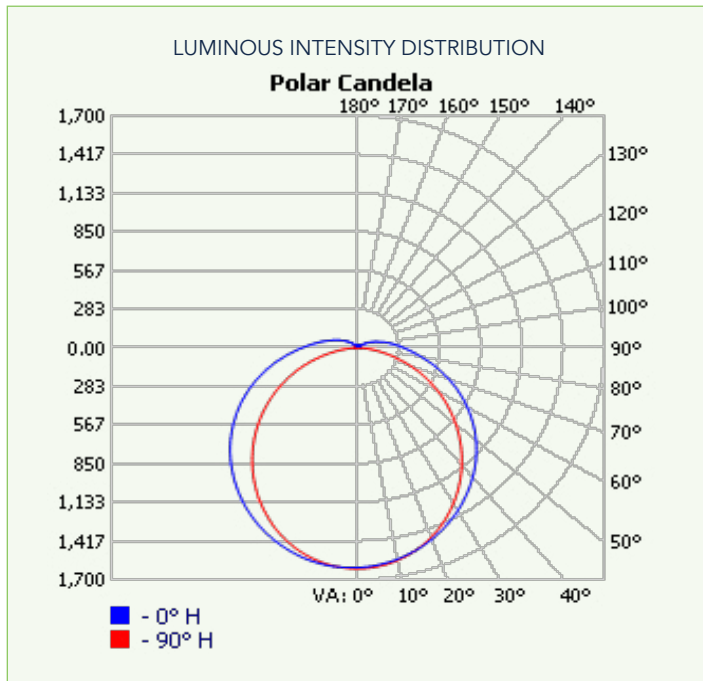

DIMENSIONS

