


Aurora Ring



Precision meets Purpose

The Aurora Ring brings harmony to modern workspaces with its seamless circular form and balanced illumination. Its diffused, glare-free light creates focus and clarity — ideal for conference rooms, meeting spaces, and environments where design and productivity intersect.

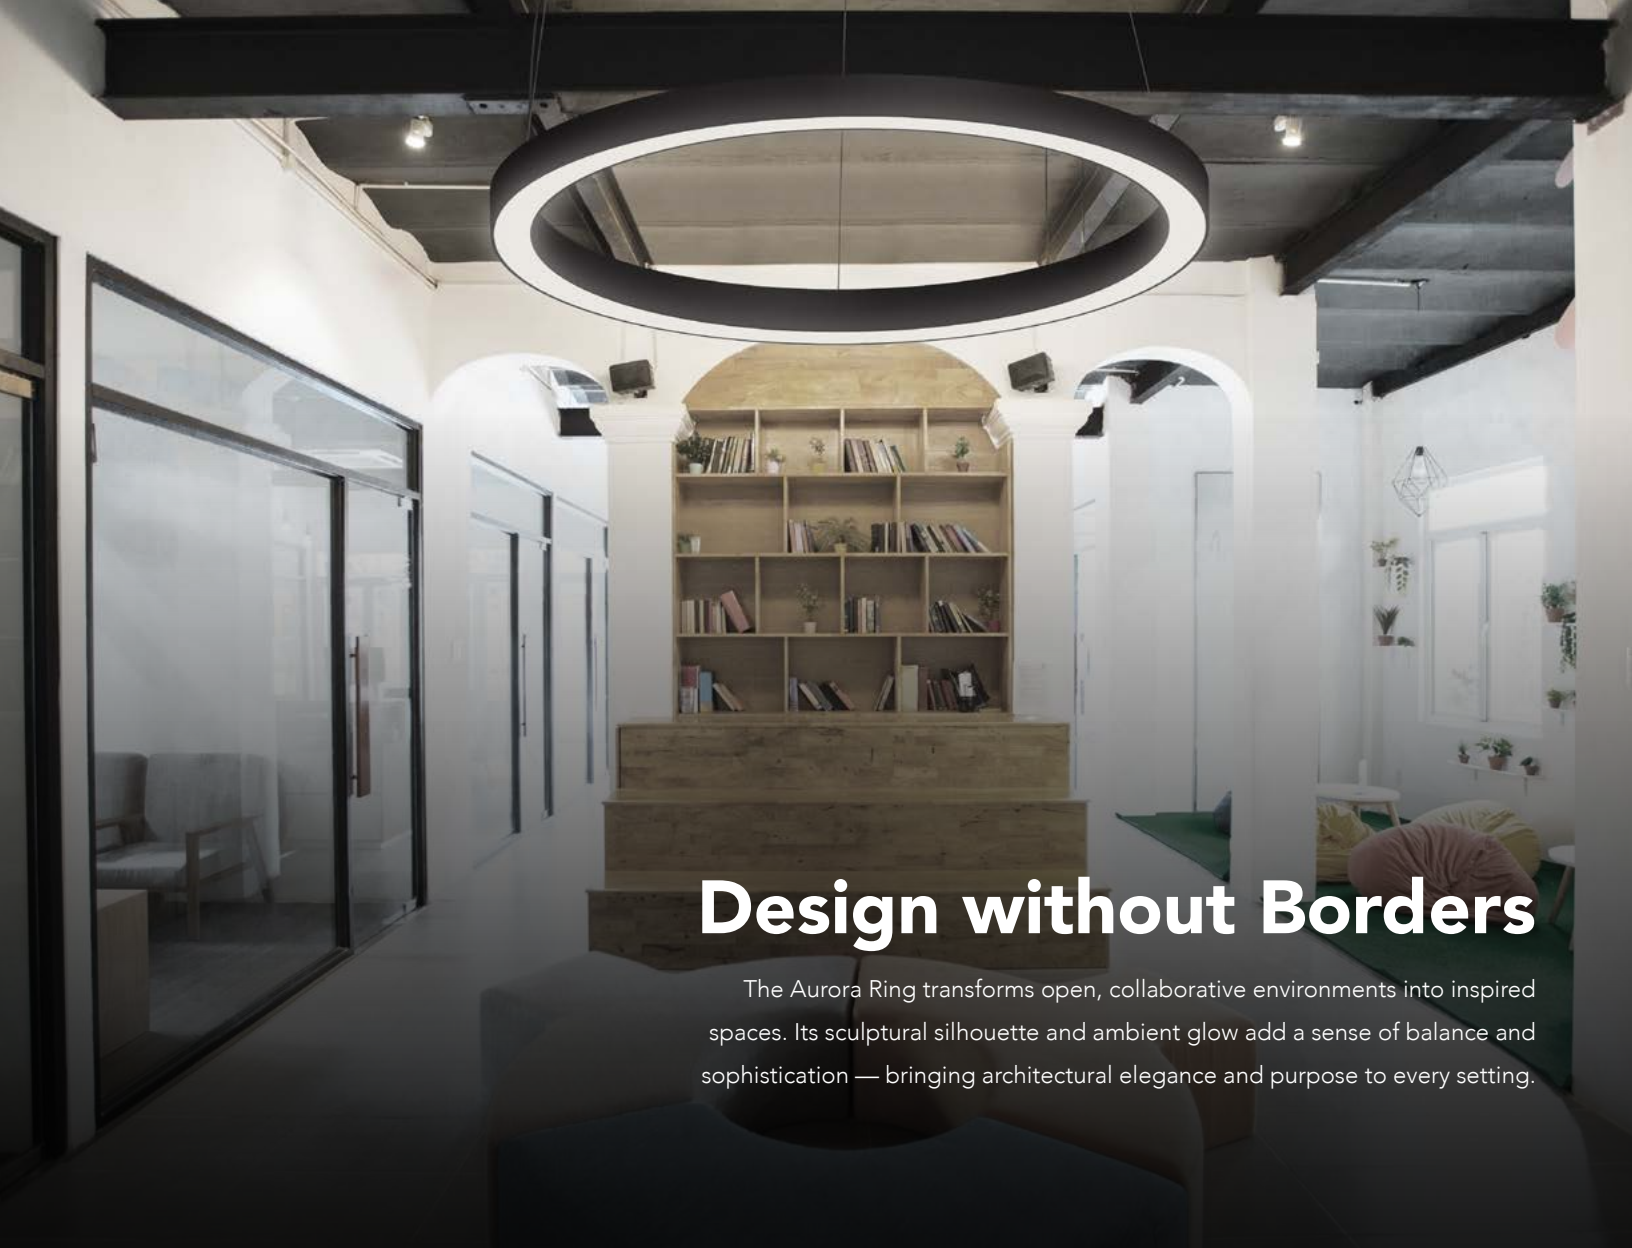

Design without Borders

The Aurora Ring transforms open, collaborative environments into inspired spaces. Its sculptural silhouette and ambient glow add a sense of balance and sophistication — bringing architectural elegance and purpose to every setting.

Elegance in Every Curve

The Aurora's circular form defines its environment with subtle sophistication. Its shape accentuates architectural lines, softens edges, and creates a sense of balance within any space — blending sculptural beauty with purposeful illumination.

Technical Details: 120-347V AC Dual Voltage | 24" models: 10/20/30/40W; 36" models: 30/40/50/60W; 48" models: 40/60/80/100W Power output | Up to 14,000 lm luminous output
Selectable 30000K, 3500K, 4000K, 5000K CCT | 0-10V Dimming | Pendant mounted via different canopy accessories | Optopnal emergency driver available

Brilliance in every Space

The Aurora enhances every environment with radiant balance and precision. Its soft, even glow elevates form and function — bringing warmth, clarity, and modern sophistication to any space.

Features: Available in 24", 36" and 48" diameter | Extruded aluminum alloy body & frosted polycarbonate lens | Available in matte black, white and custom finishes | Two selectable Light Distribution (down / up & down) in multiple settings | Multi suspension canopy | Optional Microwave Sensor available | Pending DLC Certification



Color that Adapts

The Aurora offers seamless adaptability with selectable CCT options — 3000K, 3500K, 4000K, and 5000K. From warm, welcoming tones to bright, contemporary clarity, its light effortlessly adjusts to complement any environment.

Direct

0% upwards

Direct/Indirect

20% upwards

Direct/Indirect

30% upwards

Direct/Indirect

40% upwards


100% downwards

80% downwards

70% downwards

60% downwards

Shape Your Lighting

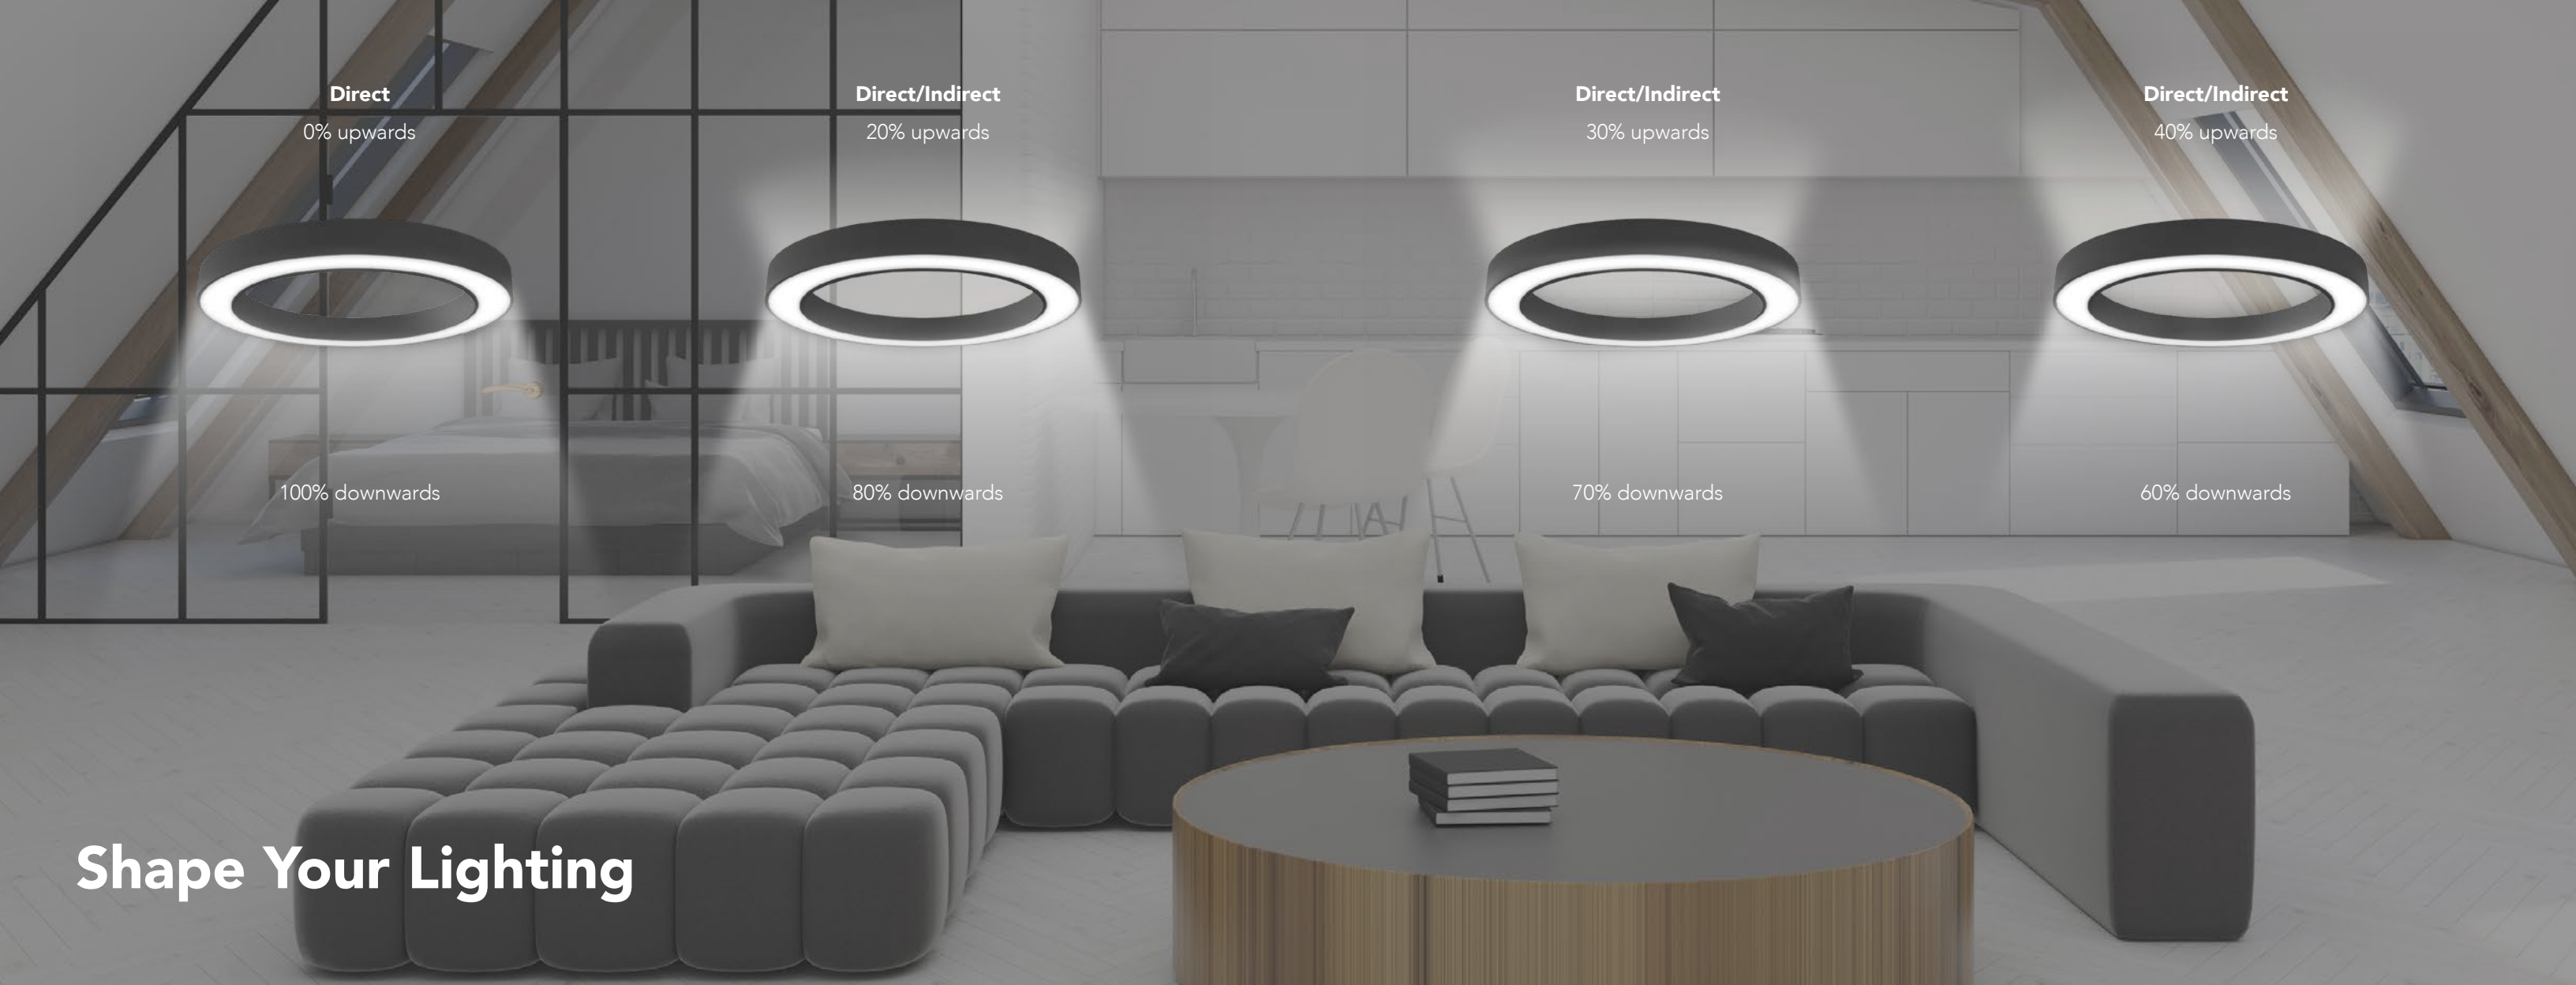



Specifications

Technical Details


Voltage	120-347V AC
Wattages	24": 10/20/30/40W 36": 30/40/50/60W 48": 40/60/80/100W
CRI	90
Efficacy	up to 143.7 lm/W
Lumens	up to 13,788 lm
Rated Lifespan	L90 @ 100,000 hrs
Beam Angle	>100°
Dimming	0-10V
Mounting	Suspended
Operating Temperature	-4°F to 104°F (-20°C to 40°C)



Product Variants

24" White (R34401)	24" Black (R34402)
36" White (R34404)	36" Black (R34403)
48" White (R34405)	48" Black (R34406)

Available Finishes



Black White

Color Temperatures



3000 3500 4000 5000

Certifications



Warranty





CA Headquarters

9133 Leslie St. #120
Richmond Hill, ON
L4B 4N1 Canada

US Office

8735 Dunwoody Place
#6728 Atlanta, GA
30350 United States

info@renolighting.com
www.renolighting.com

Proudly 🍁 Canadian