




STRATOS Series

Architectural Vertical Pendant

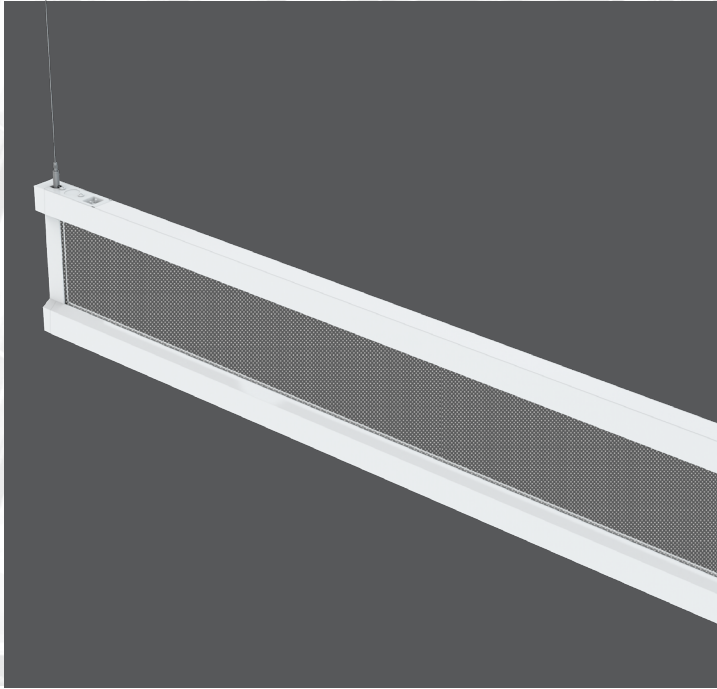

Product Features

- Selectable Light Distributions: Up, Down, Up&Down
- Clear Polycarbonate light guide plate distributes light evenly creating an elegant, glare-free illumination
- A sleek white aluminum frame integrated with the clear light guide plate makes a sophisticated design statement, even when not illuminated
- Choose your look: Standard End Cap (2pcs), Curved End Cap (2 pcs), and Straight End Cap (2 pcs) included in box
- 0-10V Dimming
- Designed for suspension mounting via 10ft Aircraft Cable Kit (included) and is equipped with a 10ft, 5-wire power cord
- IP20 Damp Location rated
- Operating temp: -4°F to +104°F (-20°C to +45°C)
- Rated lifetime L80: >100,000 hours
- 10 Year Limited Warranty

| | | | |
|------|--|-------------|--|
| Date | | Project | |
| Type | | Part Number | |

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Transform your space with this Architectural Vertical Pendant, engineered to provide glare-free task lighting with a unique illumination design. A unique light guide plate evenly distributes luminous flux, creating a soft, ambient glow. Its seamless design ensures dot-free illumination, replicating the natural brightness and ambiance of a window. Perfect for adding a touch of modern elegance to any designer's concept.



Key Specifications

| | |
|----------------------------|---|
| Voltage | 120-347V |
| Wattage | 40W |
| Lumens | Up to 4,800 lm |
| Selectable CCT | Selectable 30/35/4000K |
| Default CCT Setting | 4000K |
| CRI | >90 |
| Beam Angle | 120° |
| Dimming | 0-10V |
| Power Factor | >0.9 |
| THD | <20% |
| Mounting | Suspension, Row-Mounting (optional accessory) |
| Application | Commercial, Residential, Offices, Retail Facilities |





STRATOS Series | Architectural Vertical Pendant

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

Specifications



| Order# | Model | Wattage | Voltage | Lumens | Efficacy | CCT | Finish |
|--------|--------------------------|---------|----------|----------|------------|-------|--------|
| R33421 | RENO-ULVP-DV-40W-MCCT-WH | 40W | 120-347V | 4,489 lm | 112 lm/W | 3000K | White |
| | | | | 4,673 lm | 116.8 lm/W | 3500K | |
| | | | | 4,755 lm | 118.9 lm/W | 4000K | |
| R33422 | RENO-ULVP-DV-40W-MCCT-BK | 40W | 120-347V | 4,489 lm | 112 lm/W | 3000K | Black |
| | | | | 4,673 lm | 116.8 lm/W | 3500K | |
| | | | | 4,755 lm | 118.9 lm/W | 4000K | |

Accessories

| Order# | Model | Description | Finish |
|--------|----------------|--|--------|
| R39021 | RENO-ULVP-I-WH | *Connection Kit for row-mounting two Vertical Pendants | White |
| R39022 | RENO-ULVP-I-BK | *Connection Kit for row-mounting two Vertical Pendants | Black |

*The maximum connection of each input line is: 10 units at 120V, 15 units at 277V, and 15 units at 347V

Photometrics

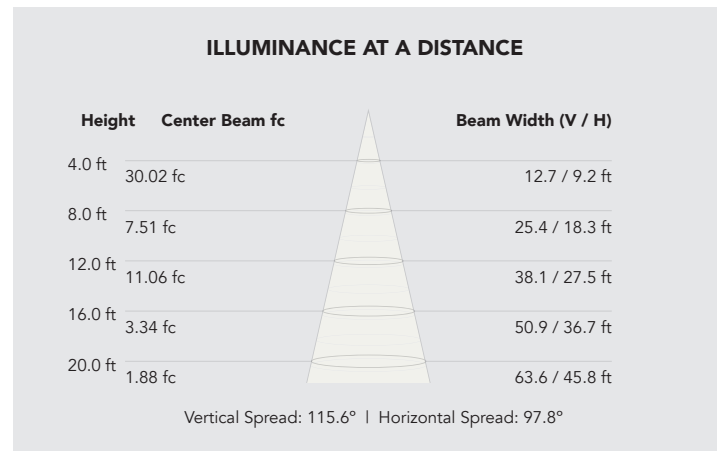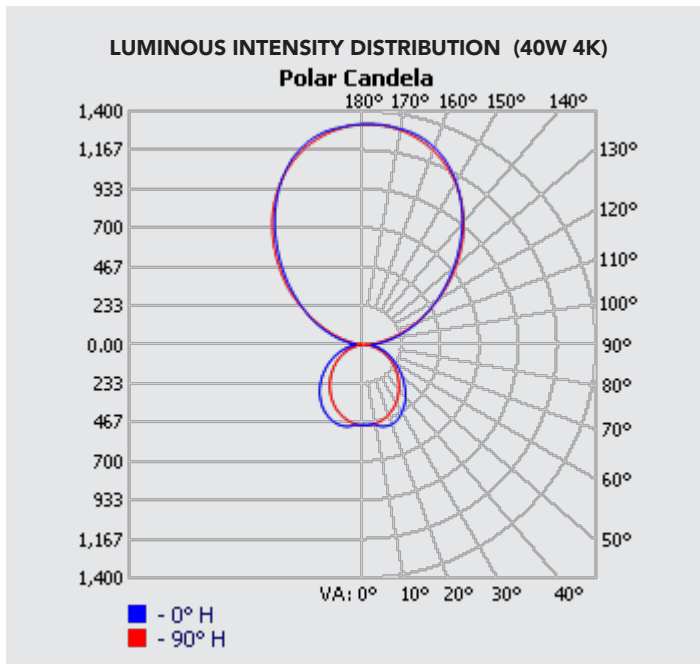




STRATOS Series | Architectural Vertical Pendant


ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Dimensions

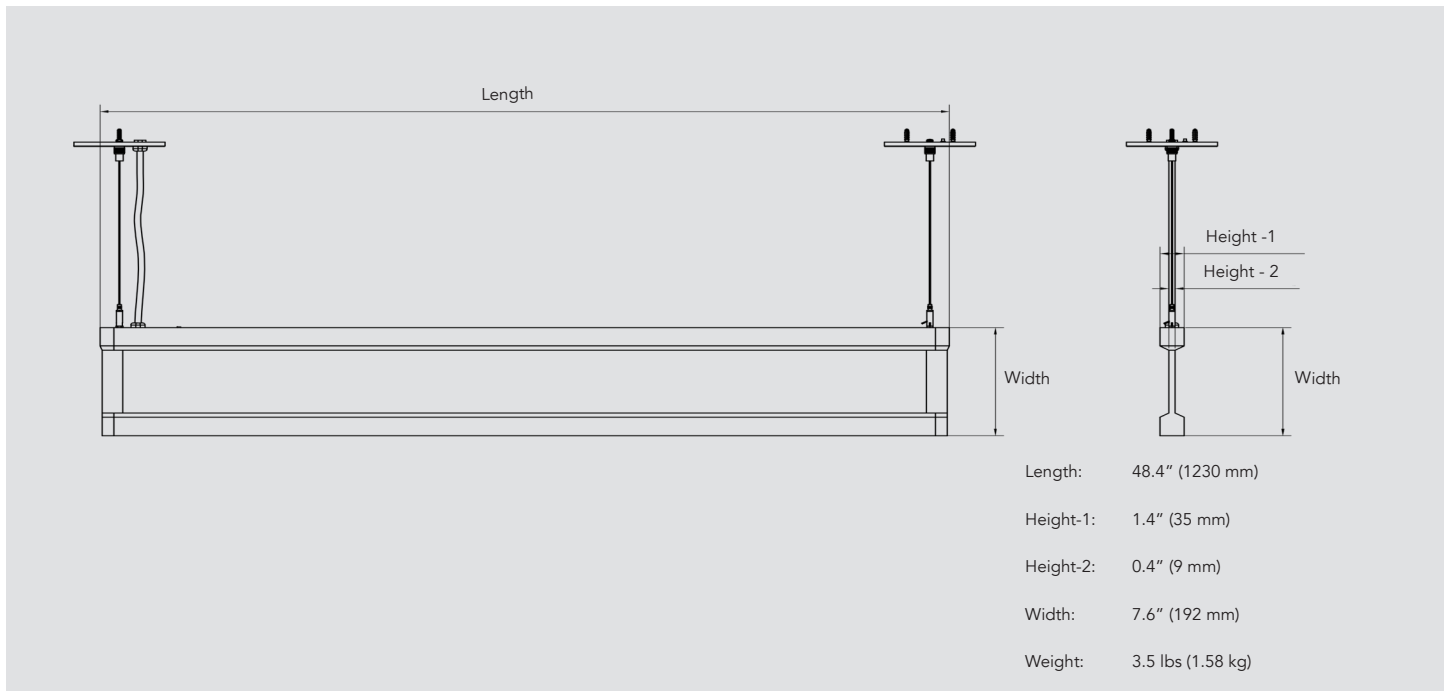

Included in Box

R33421

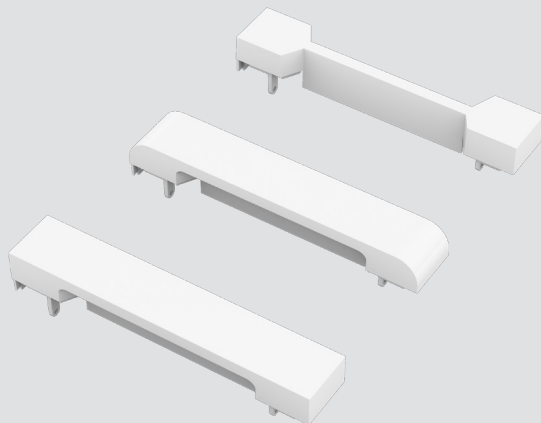

R33422

