



STRATOS Series

Architectural Vertical Pendant



Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING™

Transform your space with this Architectural Vertical Pendant, engineered to provide glare-free task lighting with a unique illumination design. A unique light guide plate evenly distributes luminous flux, creating a soft, ambient glow. Its seamless design ensures dot-free illumination, replicating the natural brightness and ambiance of a window. Perfect for adding a touch of modern elegance to any designer's concept.



Product Features

- Selectable Light Distributions: Up, Down, Up&Down
- Clear Polycarbonate light guide plate distributes light evenly creating an elegant, glare-free illumination
- A sleek white aluminum frame integrated with the clear light guide plate makes a sophisticated design statement, even when not illuminated
- Choose your look: Standard End Cap (2pcs), Curved End Cap (2 pcs), and Straight End Cap (2 pcs) included in box
- 0-10V Dimming
- Designed for suspension mounting via 10ft Aircraft Cable Kit (included) and is equipped with a 10ft, 5-wire power cord
- IP20 Damp Location rated
- Operating temp: -4°F to +104°F (-20°C to +45°C)
- Rated lifetime L80: >100,000 hours
- 10 Year Limited Warranty

Key Specifications

Voltage	120-347V
Wattage	40W
Lumens	Up to 4,800 lm
Selectable CCT	Selectable 30/35/4000K
Default CCT Setting	4000K
CRI	>90
Beam Angle	120°
Dimming	0-10V
Power Factor	>0.9
THD	<20%
Mounting	Suspension, Row-Mounting (optional accessory)
Application	Commercial, Residential, Offices, Retail Facilities





STRATOS Series | Architectural Vertical Pendant

ARCHITECTURAL LUMINAIRES BY  RENO LIGHTING

Specifications



Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R33421	RENO-ULVP-DV-40W-MCCT-WH	40W	120-347V	4,489 lm	112 lm/W	3000K	White
				4,673 lm	116.8 lm/W	3500K	
				4,755 lm	118.9 lm/W	4000K	
R33422	RENO-ULVP-DV-40W-MCCT-BK	40W	120-347V	4,489 lm	112 lm/W	3000K	Black
				4,673 lm	116.8 lm/W	3500K	
				4,755 lm	118.9 lm/W	4000K	

Accessories

Order#	Model	Description	Finish
R39021	RENO-ULVP-I-WH	*Connection Kit for row-mounting two Vertical Pendants	White
R39022	RENO-ULVP-I-BK	*Connection Kit for row-mounting two Vertical Pendants	Black

*The maximum connection of each input line is: 10 units at 120V, 15 units at 277V, and 15 units at 347V

Photometrics

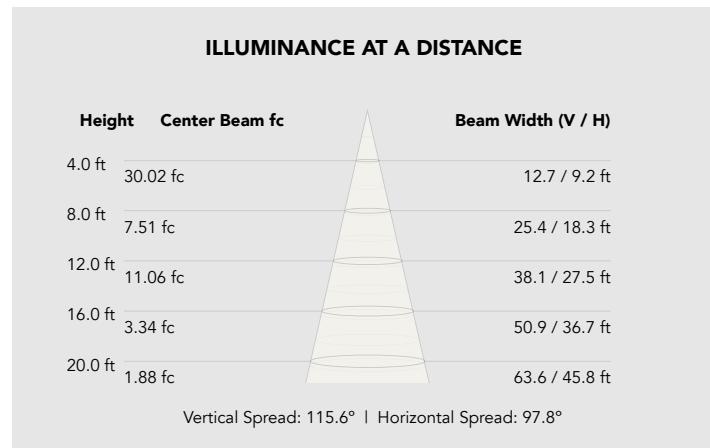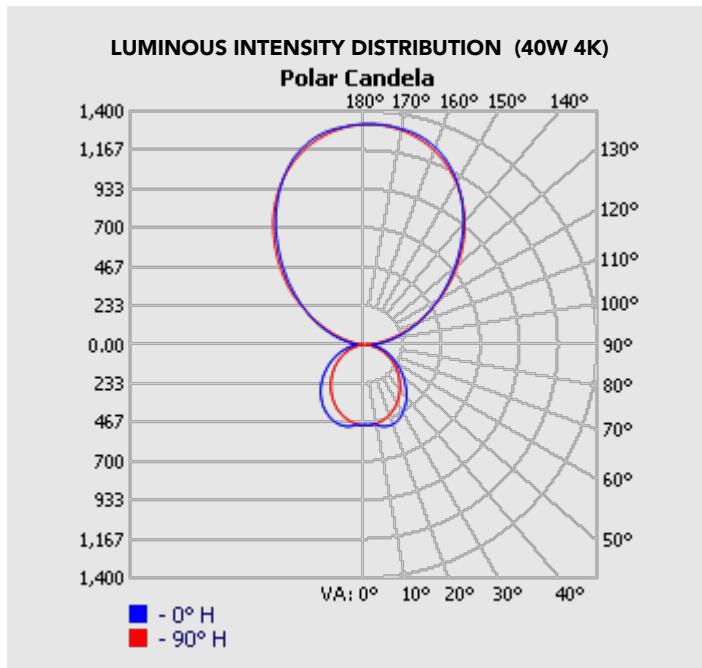




STRATOS Series | Architectural Vertical Pendant

ARCHITECTURAL LUMINAIRES BY  RENO LIGHTING

Dimensions

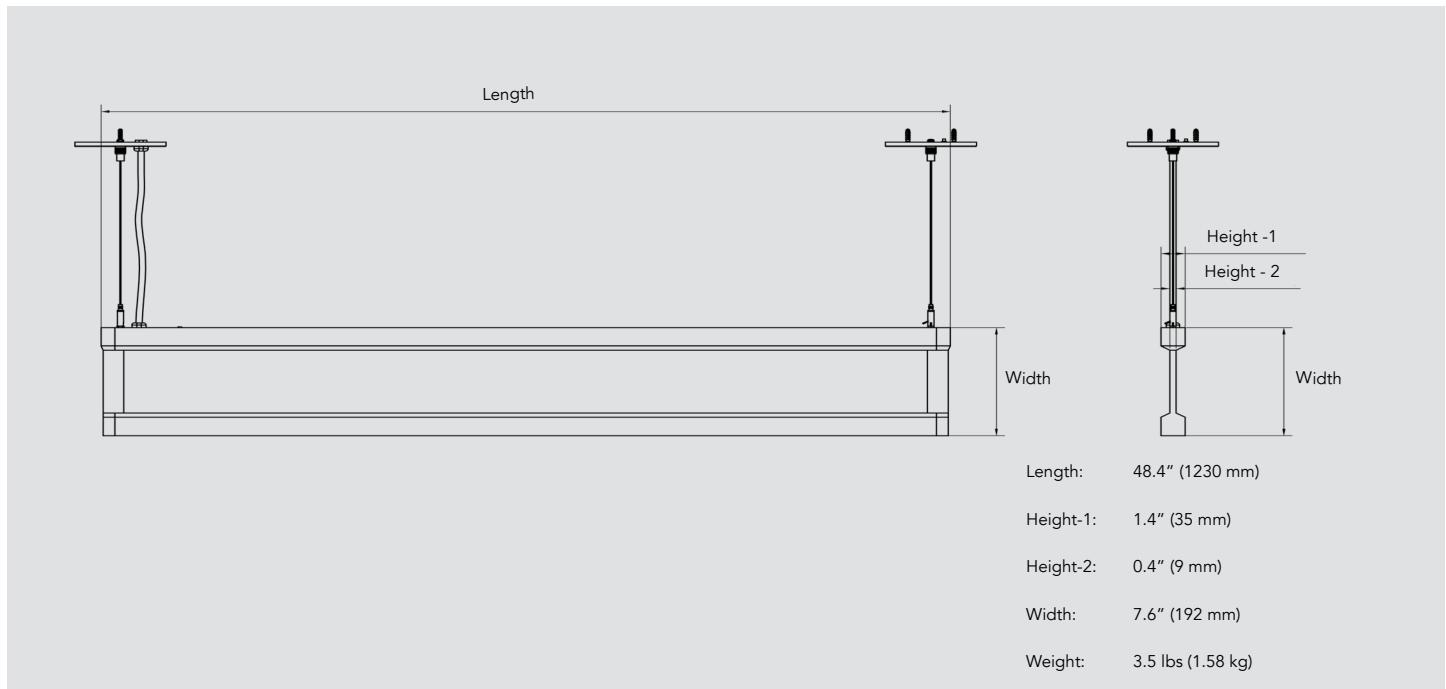

Included in Box

