


Date: _____ Project: _____

Type: _____ Part #: _____

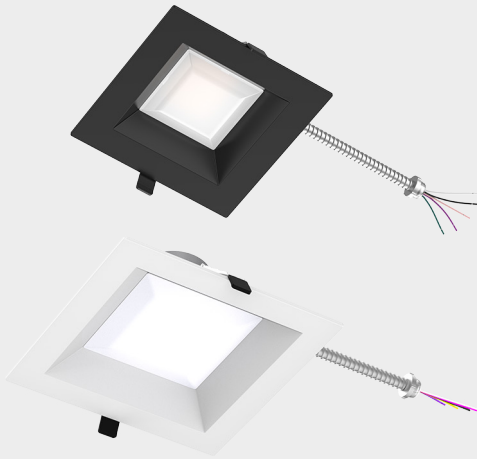

ZETA Series

Square Commercial Downlight

The Prime Square Commercial Downlight is a versatile, economical LED solution designed for ultimate site adaptability. Featuring field-adjustable lumen output and color temperature, this series comes in 4", 6", and 8" configurations.

Engineered for performance, each unit offers 80 or 90 CRI options and universal 120–347V voltage compatibility.



Product Features

- 5 Wattage Select and 5 CCT Select technologies offer SKU reduction.
- Ideal for new construction, remodel, and retrofit applications.
- Smooth reflector trim offers clean, modern appearance.
- Type IC rated
- ADC12 Aluminum Die Casting
- Deep reflector design
- Spring installation
- Low glare
- Universal voltage 120-347V, 3-in-1 dimming LED driver.
- Wet Location.
- Projected Lifespan 50,000 Hrs
- 5 year warranty

Specifications

Voltage	AC120-347V/AC120V
Selectable Wattages	4in: 8/10/14/16W 6in: 15/22/30W 8in: 15/25/35W
CCT	27/30/35/40/5000K
Power factor	>0.9
CRI	90
Lumen	4in: Up to 1,784.3 lm 6in: Up to 3,348.1 lm 8in: Up to 4,132.0 lm
Efficacy	Up to 124.2 lm/W
Beam Angle	90°
Dimming	0-10V/Triac
Mounting	Recessed
Applications	Commercial buildings, Hospitality, Offices, Lobbies
Default Settings	4in: 16W, 5,000K 6in: 30W, 5,000K 8in: 35W, 5,000K

Prime Square Commercial Downlight 4in White

Order #	Model	Watt	Lumens	Efficacy	CCT
R36230	RENO-DL4-MW-DV-MCCT-SQ-WH	8W	875.9 lm	Up to 109.4 lm/W	2700K
			917.1 lm	Up to 114.6 lm/W	3000K
			917.1 lm	Up to 114.6 lm/W	3500K
			917.1 lm	Up to 114.6 lm/W	4000K
			968.5 lm	Up to 121.0 lm/W	5000K
		10W	1039.7 lm	Up to 103.9 lm/W	2700K
			1087.8 lm	Up to 108.7 lm/W	3000K
			1087.8 lm	Up to 108.7 lm/W	3500K
			1087.8 lm	Up to 108.7 lm/W	4000K
			1140.8 lm	Up to 114.0 lm/W	5000K
		12W	1410.3 lm	Up to 117.5 lm/W	2700K
			1473.0 lm	Up to 122.7 lm/W	3000K
			1473.0 lm	Up to 122.7 lm/W	3500K
			1473.0 lm	Up to 122.7 lm/W	4000K
			1549.5 lm	Up to 129.1 lm/W	5000K
		16W	1600.9 lm	Up to 100.0 lm/W	2700K
			1687.6 lm	Up to 105.4 lm/W	3000K
			1687.6 lm	Up to 105.4 lm/W	3500K
			1687.6 lm	Up to 105.4 lm/W	4000K
			1784.3 lm	Up to 111.5 lm/W	5000K

Prime Square Commercial Downlight 4in Black

Order #	Model	Watt	Lumens	Efficacy	CCT
R36231	RENO-DL4-MW-DV-MCCT-SQ-BK	16W	1198.4 lm	Up to 74.9 lm/W	2700K
			1228.6 lm	Up to 76.7 lm/W	3000K
			1261.6 lm	Up to 78.8 lm/W	3500K
			1316.2 lm	Up to 82.2 lm/W	4000K
			1376.1 lm	Up to 86.0 lm/W	5000K

Prime Square Commercial Downlight 6in White

Order #	Model	Watt	Lumens	Efficacy	CCT
R36232	RENO-DL6-MW-DV-MCCT-SQ-WH	15W	1526.6 lm	Up to 101.7 lm/W	2700K
			1558.7 lm	Up to 103.9 lm/W	3000K
			1616.5 lm	Up to 107.7 lm/W	3500K
			1668.0 lm	Up to 111.2 lm/W	4000K
			1738.3 lm	Up to 115.8 lm/W	5000K
		22W	2213.5 lm	Up to 100.6 lm/W	2700K
			2270.8 lm	Up to 103.2 lm/W	3000K
			2356.1 lm	Up to 107.0 lm/W	3500K
			2423.0 lm	Up to 110.1 lm/W	4000K
			2527.7 lm	Up to 114.8 lm/W	5000K
		30W	2894.3 lm	Up to 96.4 lm/W	2700K
			2987.0 lm	Up to 99.5 lm/W	3000K
			3099.6 lm	Up to 103.3 lm/W	3500K
			3195.6 lm	Up to 106.5 lm/W	4000K
			3348.1 lm	Up to 111.6 lm/W	5000K

Prime Square Commercial Downlight 6in Black

Order #	Model	Watt	Lumens	Efficacy	CCT
R36233	RENO-DL6-MW-DV-MCCT-SQ-BK	30W	2601.7 lm	Up to 86.7 lm/W	2700K
			2618.9 lm	Up to 87.2 lm/W	3000K
			2680.2 lm	Up to 89.3 lm/W	3500K
			2734.8 lm	Up to 91.1 lm/W	4000K
			2833.3 lm	Up to 94.4 lm/W	5000K


Prime Square Commercial Downlight 8in White

Order #	Model	Watt	Lumens	Efficacy	CCT
R36234	RENO-DL8-MW-DV-MCCT-SQ-WH	15W	1624.0 lm	Up to 108.2 lm/W	2700K
			1654.4 lm	Up to 110.2 lm/W	3000K
			1718.15 lm	Up to 114.5 lm/W	3500K
			1778.2 lm	Up to 118.5 lm/W	4000K
			1843.7 lm	Up to 122.9 lm/W	5000K
		25W	2715.3 lm	Up to 108.6 lm/W	2700K
			2780.8 lm	Up to 111.2 lm/W	3000K
			2912.1 lm	Up to 116.4 lm/W	3500K
			3029.5 lm	Up to 121.1 lm/W	4000K
			3105.6 lm	Up to 124.2 lm/W	5000K
		35W	3643.0 lm	Up to 104.0 lm/W	2700K
			3730.7 lm	Up to 106.5 lm/W	3000K
			3922.9 lm	Up to 112.0 lm/W	3500K
			4080.1 lm	Up to 116.5 lm/W	4000K
			4132.0 lm	Up to 118.0 lm/W	5000K

Prime Square Commercial Downlight 8in Black

Order #	Model	Watt	Lumens	Efficacy	CCT
R36235	RENO-DL8-MW-DV-MCCT-SQ-BK	35W	3252.8 lm	Up to 92.9 lm/W	2700K
			3275.9 lm	Up to 93.5 lm/W	3000K
			3420.6 lm	Up to 97.7 lm/W	3500K
			3546.3 lm	Up to 101.3 lm/W	4000K
			3584.8 lm	Up to 102.4 lm/W	5000K

Accessories



Emergency LED Driver


R83000

RENO-EM-H08

Order #	Model	Description
R83000	RENO-EM-H08	External Mount 8W 100-347Vac 50/60Hz 0.1A max 12W max 170V DC 5°C ~50°C


Dimensions

Square Commercial Downlight 4in

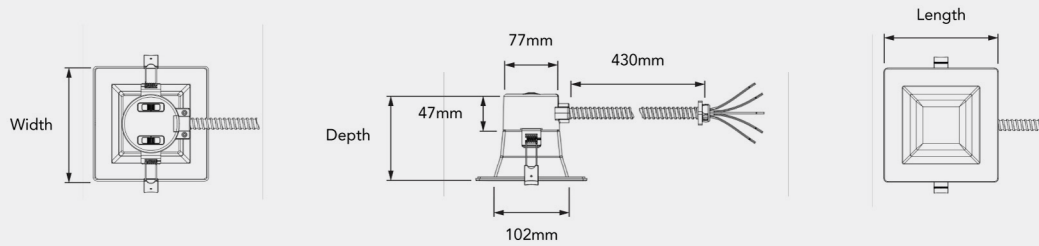


Order #	Model	Length	Width	Depth	Weight
R36230	RENO-DL4-MW-DV-MCCT-SQ-WH	152 mm	152 mm	112 mm	1.3lbs (0.6kg)
R36231	RENO-DL4-MW-DV-MCCT-SQ-BK	152 mm	152 mm	112 mm	1.3lbs (0.6kg)

Square Commercial Downlight 6in

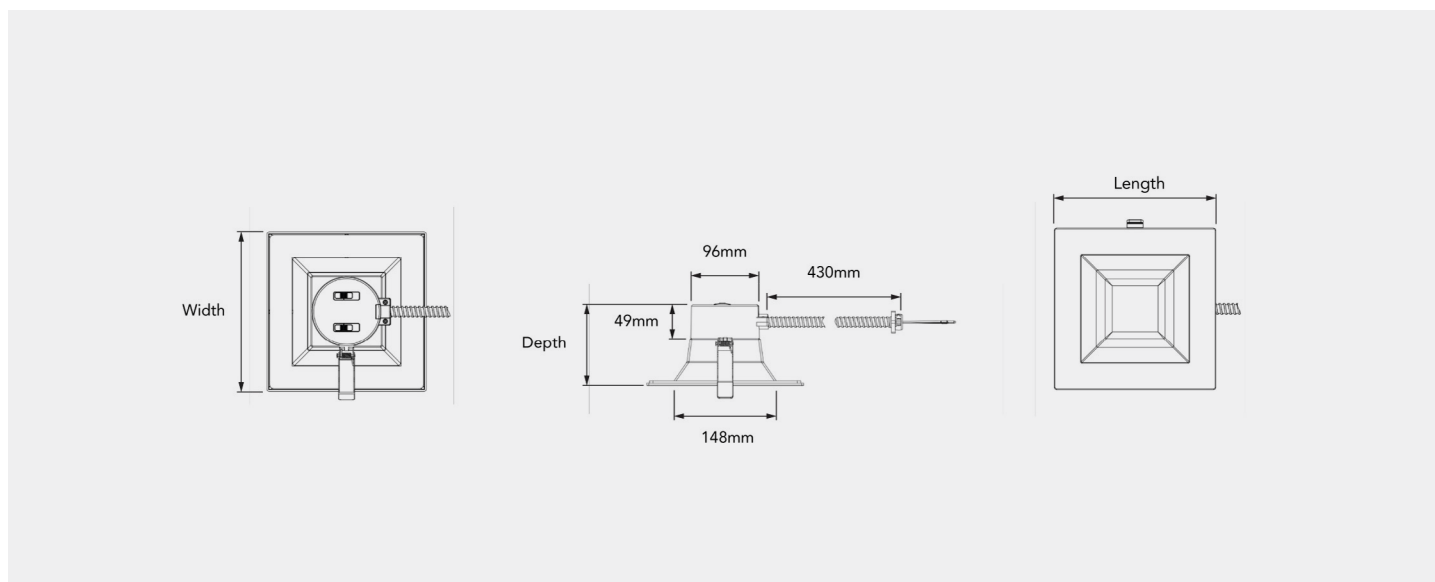

Order #	Model	Length	Width	Depth	Weight
R36232	RENO-DL6-MW-DV-MCCT-SQ-WH	220 mm	220 mm	115 mm	4.1lbs (0.9kg)
R36233	RENO-DL6-MW-DV-MCCT-SQ-BK	220 mm	220 mm	115 mm	4.1lbs (0.9kg)

Square Commercial Downlight 8in

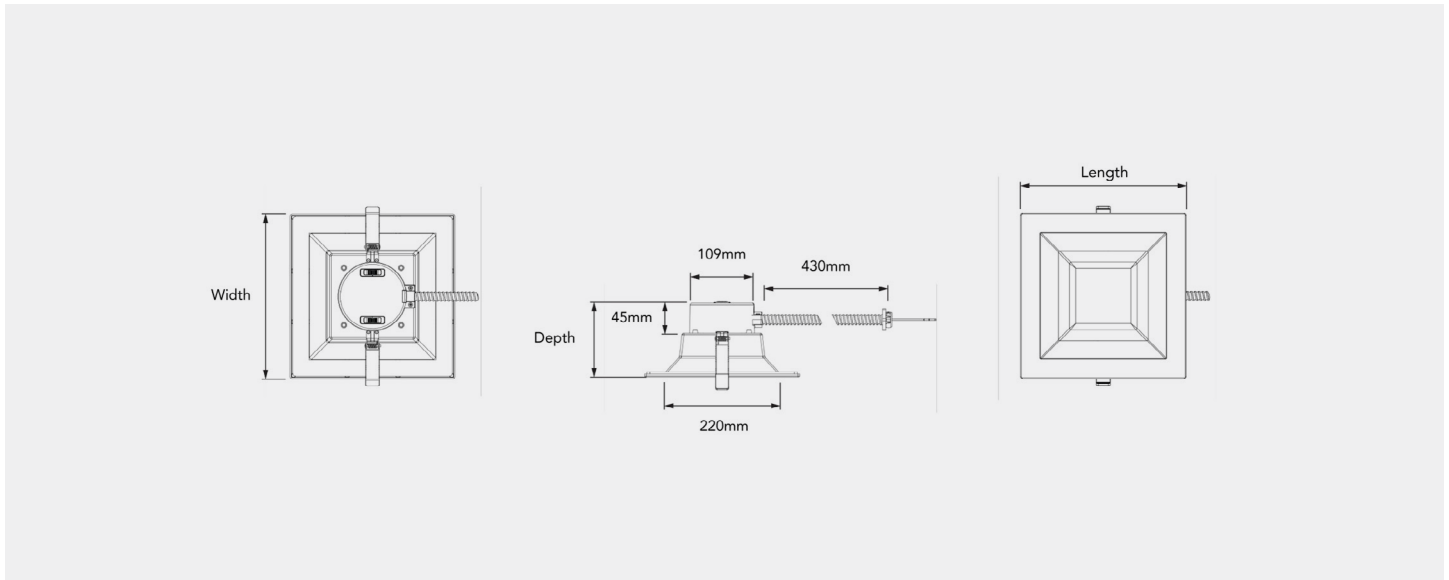

Order #	Model	Length	Width	Depth	Weight
R36234	RENO-DL8-MW-DV-MCCT-SQ-WH	260 mm	260 mm	107 mm	2.4lbs (1.1kg)
R36235	RENO-DL8-MW-DV-MCCT-SQ-BK	260 mm	260 mm	107 mm	2.4lbs (1.1kg)