

INSTRUCTIONS FOR THE FOLLOWING FIXTURES

ORDER#

MODEL#

R51060

RENO-GN-MW-DV-MCCT-BK

SAFETY INSTRUCTIONS



WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is forbidden as it may cause personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

ACCESSORIES

Wire Nuts x3



Self-tapping Screws x 2



WALL INSTALLATION

1. Take out the fixture and accessories in the box (Fig 1)




Fig 1

- 2.
- The radiator and lamp tube are fixed by rotating nuts (Fig 2)
 - Rotate the base to fix the lamp tube (Fig 2)
 - Remove the mounting plate from the back (Fig 2)


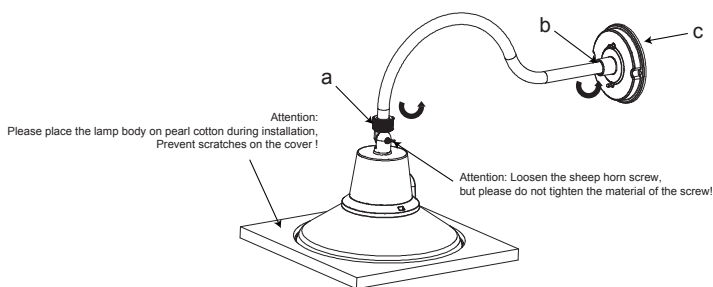


Fig 2


3. Align the screws and nuts with the holes on the Mounting Plate, tighten the screws and control the protruding length. (Fig 3)

Fig 3



4. Align the Mounting Plate to the hole of the junction box and tighten it with screws. (Fig 5)

Fig 4



WALL INSTALLATION

5. Connect the corresponding terminals according to the wiring diagram, connect L, N, and ground wires correctly. (Fig 5)

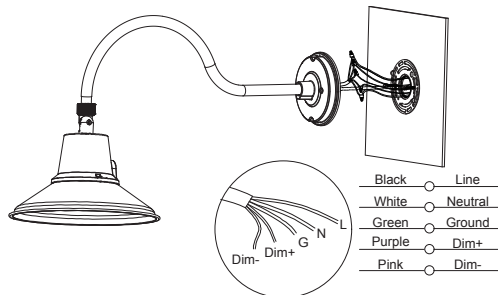


Fig 5

6. Hide the connected wires in the junction box, align the lamp body with the screws, and tighten the nuts. (Fig 6)

Attention:

Here, you can choose to fix an additional 2 screws for reinforcement

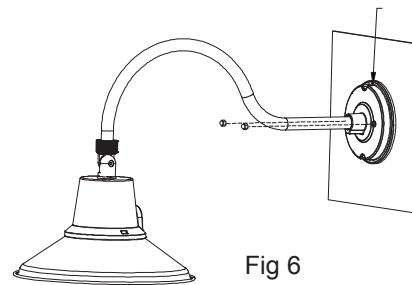


Fig 6

JUNCTION BOX INSTALLATION

1. Take out the fixture and accessories in the box (Fig 1)




Fig 1

2.

- The radiator and lamp tube are fixed by rotating nuts (Fig 2)
- Rotate the base to fix the lamp tube (Fig 2)
- Remove the mounting plate from the back (Fig 2)

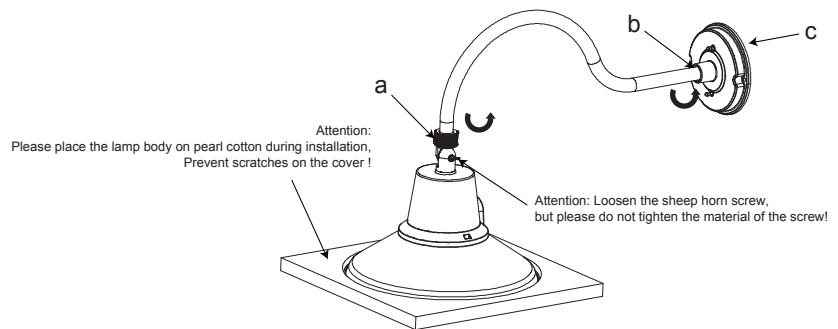


Fig 2

3. Align the screws and nuts with the holes on the Mounting Plate, tighten the screws and control the protruding length. (Fig 1)




Fig 1

4. Align the Mounting Plate to the hole of the junction box and tighten it with screws. (Fig 2)




Fig 2

5. Connect the corresponding terminals according to the wiring diagram, connect L, N, and ground wires correctly. (Fig 5)

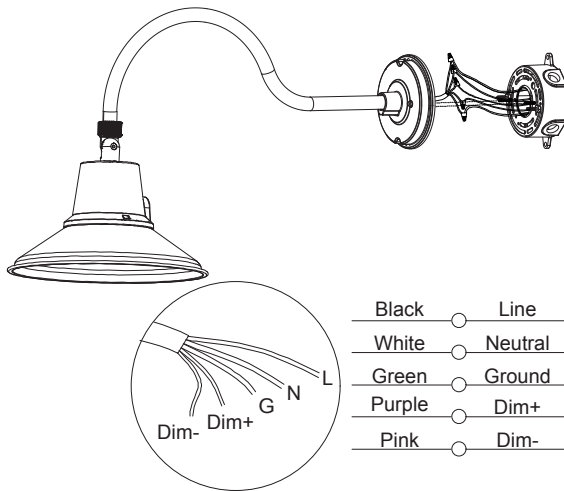


Fig 5

6. Hide the connected wires in the junction box, align the lamp body with the screws, and tighten the nuts. (Fig 6)

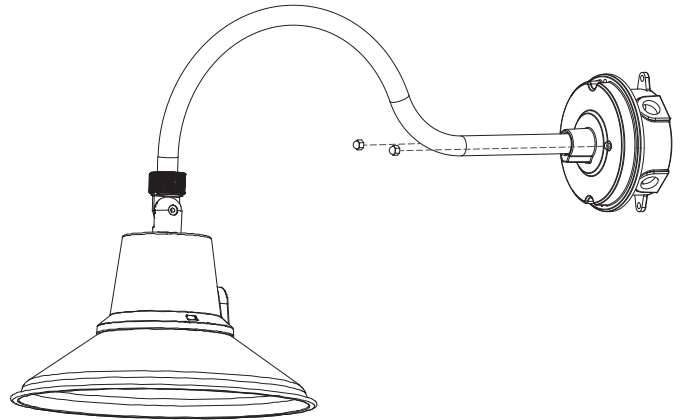


Fig 6

INSTRUCTIONS FOR REPLACING THE COVER

1. Loosen the 2 screws on the cover and rotate them (Fig 1)

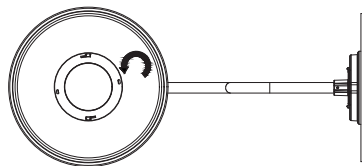


Fig 1

2. Remove the cover and replace it with a different shape (Fig 2)

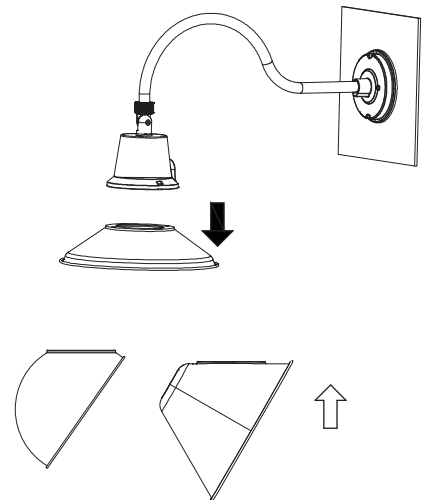


Fig 2

3. After replacing the cover, rotate it and tighten the two screws on the cover (Fig 3)




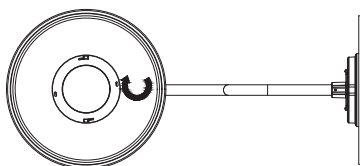


Fig 3

WATTAGE & CCT SELECTABLE GUIDANCE

Factory Default Setting:

Watt: 25W CCT: 5000K Photocell: ON

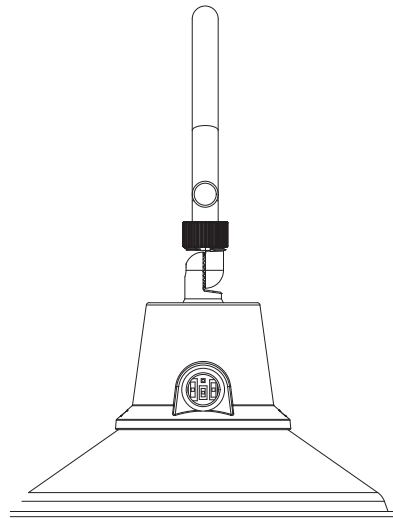

DIP Switch for Watt
& Photocell & CCT