

Date		Project	
Type		Part Number	

LUMA Series

Flushmount Fixture with Sensor

RENO Lighting's LUMA series of ceiling-mount luminaires are integrated with a microwave sensor and fully dimmable. With their low-profile, white frosted acrylic diffusers and offering multi CCT and selectable wattages, they make the perfect solution for commercial and decorative applications.



PRODUCT FEATURES

- Integrated Microwave Sensor
- Sensor Setting Configurable with Remote R73004
- Accessories Included: Mounting Bracket, J-Box Screws, & Wire Nuts
- PC Body with Frosted Polycarbonate Lens, Aluminum Back
- Ultra Slim Profile Design
- No Glare or Dark Spots, Instant On
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Damp location suitable
- Installation height: 3 meters
- Detection area: 2-5 meters
- Rated Lifespan: L70 ~50,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120V
Wattage	Selectable Wattage 10" - 8/12/16W 13" - 12/16/22W 15" - 16/22/30W
Sizes	10", 13", 15"
Power Factor	>0.9
CCT	27/30/35/40/5000K
CRI	>80
Lumens	680 – 2,550 lm
Beam Angle	120°
Mounting	Ceiling and Wall
Applications	Commercial, Residential, Retail Facilities, Multi-Res

SPECIFICATIONS – 10” MULTI POWER (10/12/16W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R31041	RENO-CFM-10”-MW-MCCT-MS	8W	120V	544 lm	68 lm/W	2700K
				560 lm	70 lm/W	3000K
				600 lm	75 lm/W	3500K
				680 lm	85 lm/W	4000K
				640 lm	80 lm/W	5000K
		12W	120V	816 lm	68 lm/W	2700K
				840 lm	70 lm/W	3000K
				900 lm	75 lm/W	3500K
				1,020 lm	85 lm/W	4000K
				960 lm	80 lm/W	5000K
		16W	120V	1,088 lm	68 lm/W	2700K
				1,120 lm	70 lm/W	3000K
				1,200 lm	75 lm/W	3500K
				1,360 lm	85 lm/W	4000K
				1,280 lm	80 lm/W	5000K

SPECIFICATIONS – 13” MULTI POWER (12/16/22W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R31042	RENO-CFM-13”-MW-MCCT-MS	12W	120V	816 lm	68 lm/W	2700K
				840 lm	70 lm/W	3000K
				900 lm	75 lm/W	3500K
				1,020 lm	85 lm/W	4000K
				960 lm	80 lm/W	5000K
		16W	120V	1,088 lm	68 lm/W	2700K
				1,120 lm	70 lm/W	3000K
				1,200 lm	75 lm/W	3500K
				1,360 lm	85 lm/W	4000K
				1,280 lm	80 lm/W	5000K
		22W	120V	1,496 lm	68 lm/W	2700K
				1,540 lm	70 lm/W	3000K
				1,650 lm	75 lm/W	3500K
				1,870 lm	85 lm/W	4000K
				1,760 lm	80 lm/W	5000K

SPECIFICATIONS – 15" MULTI POWER (16/22/30W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT		
R31043	RENO-CFM-15"-MW-MCCT-MS	16W	120V	1,088 lm	68 lm/W	2700K		
				1,120 lm	70 lm/W	3000K		
				1,200 lm	75 lm/W	3500K		
				1,360 lm	85 lm/W	4000K		
				1,280 lm	80 lm/W	5000K		
		22W	120V	22W	120V	1,496 lm	68 lm/W	2700K
						1,540 lm	70 lm/W	3000K
						1,650 lm	75 lm/W	3500K
						1,870 lm	85 lm/W	4000K
						1,760 lm	80 lm/W	5000K
		30W	120V	30W	120V	2,040 lm	68 lm/W	2700K
						2,100 lm	70 lm/W	3000K
						2,250 lm	75 lm/W	3500K
						2,550 lm	85 lm/W	4000K
						2,400 lm	80 lm/W	5000K

ACCESSORIES – REMOTE TO CONFIGURE FIXTURE SETTINGS



R73004
RENO-REMOTE-M
Remote control for Deco and LUMA Series


Order#	Model	Description
R73004	RENO-REMOTE-M	Remote control for Deco and LUMA Series

REMOTE FUNCTIONS



DIMENSIONS

10" - RENO-CFM-10"-MW-MCCT-MS

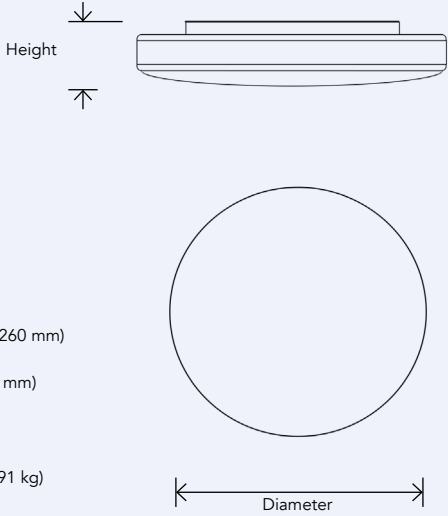


Height

Diameter

Diameter: 10.24" (260 mm)
Height: 2.4" (61 mm)
Weight: 2 lbs (0.91 kg)

13" - RENO-CFM-13"-MW-MCCT-MS

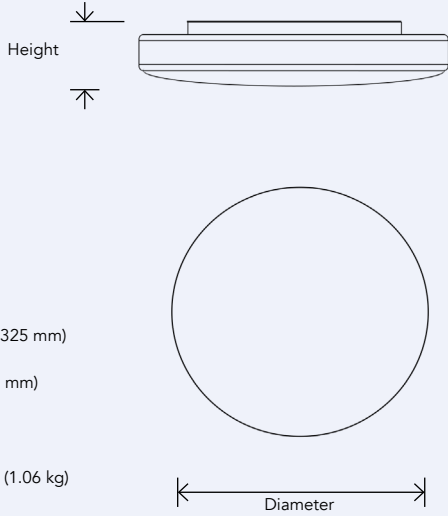


Height

Diameter

Diameter: 12.80" (325 mm)
Height: 2.4" (61 mm)
Weight: 2.33 lbs (1.06 kg)

15" - RENO-CFM-15"-MW-MCCT-MS

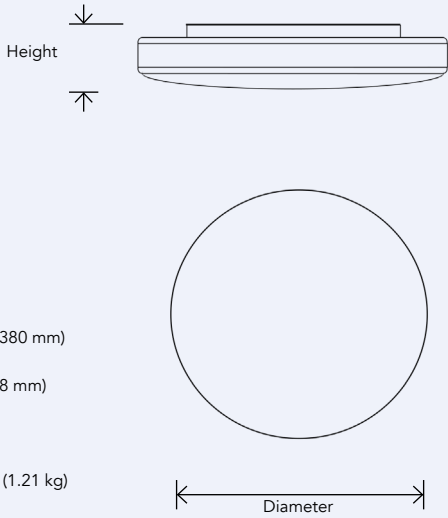

Height

Diameter

Diameter: 14.96" (380 mm)
Height: 2.68" (68 mm)
Weight: 2.67 lbs (1.21 kg)