



| | | | |
|------|--|-------------|--|
| Date | | Project | |
| Type | | Part Number | |



ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

CLESSIDRA Series

Up & Down Wall Sconce



Sleek and modern, this up-down wall sconce features an elegant hourglass silhouette, casting ambient light both upward and downward for a balanced glow. Its minimalist design adds a touch of sculptural flair, making it perfect for walkways, entrances, or as accent lighting in any contemporary space.

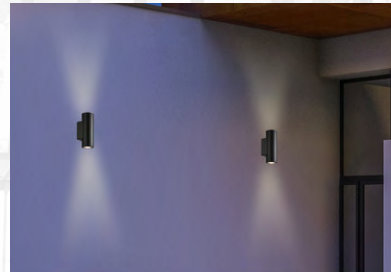

Product Features

- Selectable up/down or Up&Down Light Distribution
- Built-in Photocell
- Die-cast Aluminum Housing
- Powder-Coated Black or Silver Finish
- Custom Colours Available
- Glass Lens
- Specially Processed Safety Glass prevents dirt and water from accumulating
- IP65 Wet Location Rated
- UGR: <19
- Operating temp: -22°F to +122°F (-30°C to +50°C)
- Rated lifetime L70: >100,000 hours
- 10 Year Limited Warranty

Key Specifications

| | |
|-------------------------|---|
| Voltage | 120-347V |
| Wattage | Selectable: 18/30/45/60W |
| CCT | Selectable: 30/40/5000K |
| Efficacy | 110 lm/W |
| Lumens | Up to 6,600 lm |
| CRI | >80 |
| Power Factor | >0.9 |
| THD | <20% |
| Beam Angle | 30° |
| Dimming | 0-10V Dimming |
| Surge Protection | 6kVA |
| Finish | Black or Silver |
| Mounting | Wall |
| Applications | Hotel lobby, Conference rooms, Corridor, Auditoriums, Entryways |





CLESSIDRA Series | Up & Down Wall Sconce

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

Specifications

| Order# | Model | Wattage | Voltage | Lumens | Efficacy | CCT |
|--------|-------------------------------|---------|----------|----------|----------|-------|
| R31408 | RENO-CYDL-MW-DV-MCCT-7-HL-BK | 18W | 120-347V | 2,096 lm | 116 lm/W | 3000K |
| | | | | 2,213 lm | 123 lm/W | 4000K |
| | | | | 2,159 lm | 119 lm/W | 5000K |
| | | 30W | 120-347V | 3,401 lm | 113 lm/W | 3000K |
| | | | | 3,678 lm | 122 lm/W | 4000K |
| | | | | 3,503 lm | 116 lm/W | 5000K |
| | | 45W | 120-347V | 4,816 lm | 107 lm/W | 3000K |
| | | | | 5,375 lm | 119 lm/W | 4000K |
| | | | | 4,961 lm | 110 lm/W | 5000K |
| | | 60W | 120-347V | 6,080 lm | 101 lm/W | 3000K |
| | | | | 6,822 lm | 113 lm/W | 4000K |
| | | | | 6,201 lm | 103 lm/W | 5000K |
| R31409 | RENO-CYDL-MW-DV-MCCT-7-HL-SLV | 18W | 120-347V | 2,096 lm | 116 lm/W | 3000K |
| | | | | 2,213 lm | 123 lm/W | 4000K |
| | | | | 2,159 lm | 119 lm/W | 5000K |
| | | 30W | 120-347V | 3,401 lm | 113 lm/W | 3000K |
| | | | | 3,678 lm | 122 lm/W | 4000K |
| | | | | 3,503 lm | 116 lm/W | 5000K |
| | | 45W | 120-347V | 4,816 lm | 107 lm/W | 3000K |
| | | | | 5,375 lm | 119 lm/W | 4000K |
| | | | | 4,961 lm | 110 lm/W | 5000K |
| | | 60W | 120-347V | 6,080 lm | 101 lm/W | 3000K |
| | | | | 6,822 lm | 113 lm/W | 4000K |
| | | | | 6,201 lm | 103 lm/W | 5000K |








CLESSIDRA Series | Up & Down Wall Sconce

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING



Photometrics - 18W/4000K

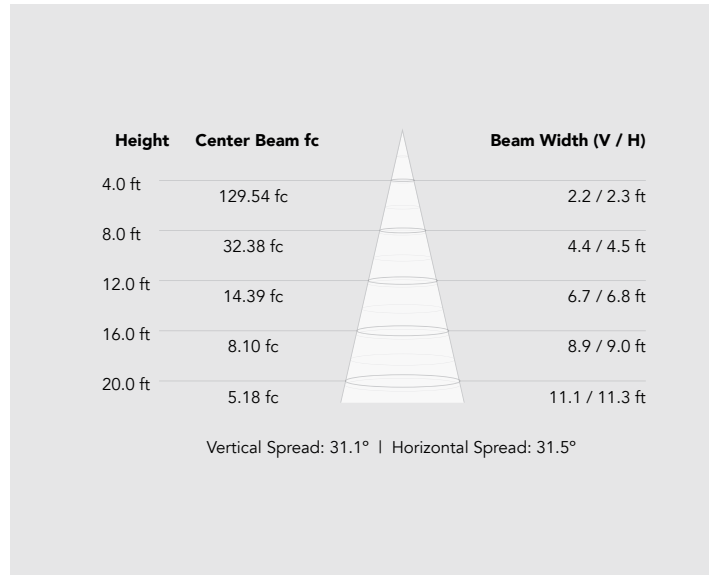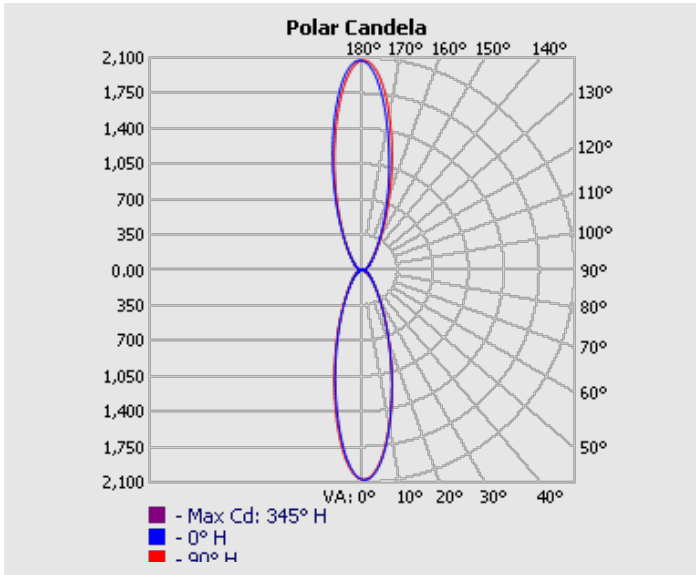


Photometrics - 30W/4000K

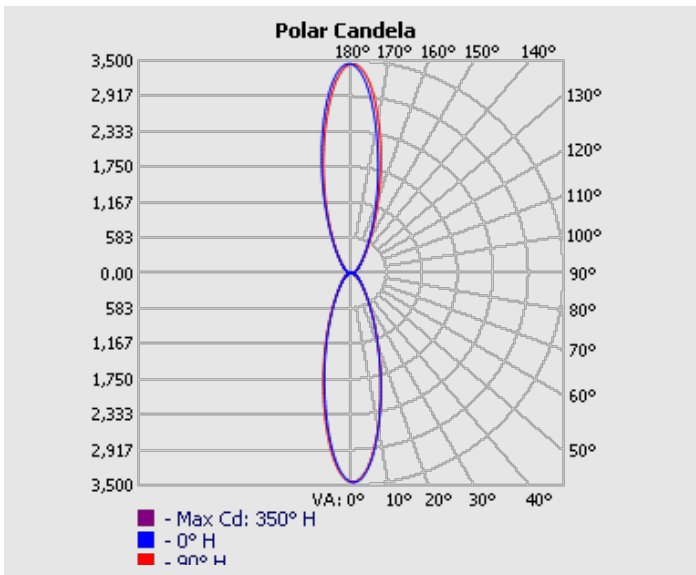

Photometrics - 45W/4000K

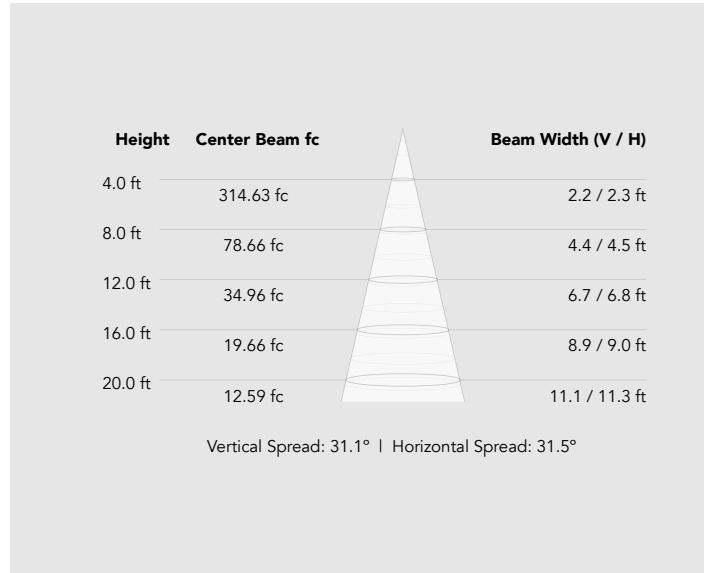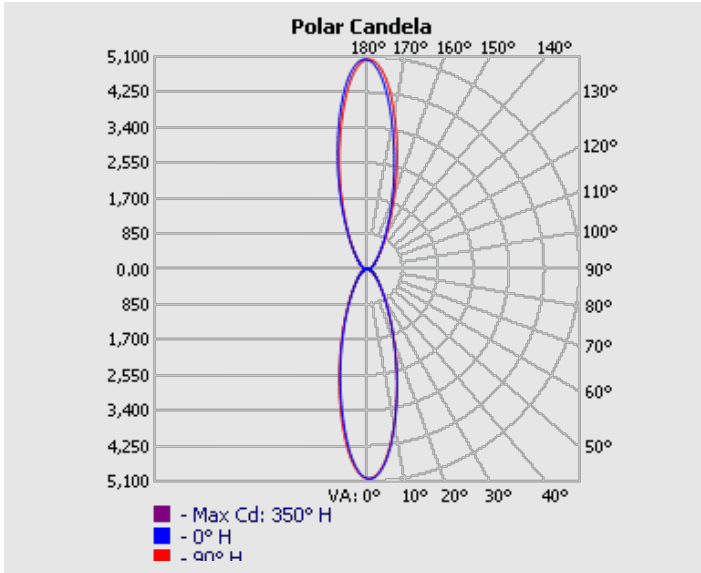

Photometrics - 60W/4000K

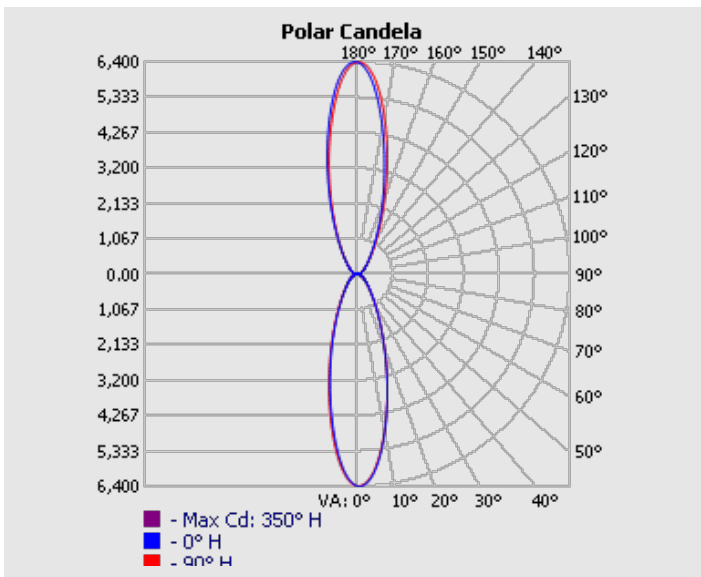

Light Distribution



Dimensions

