

Date		Project	
Type		Part Number	

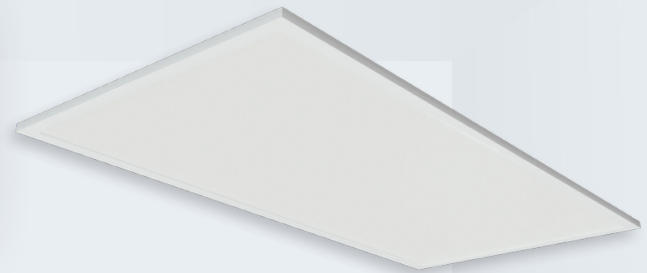


ALL-IN-ONE PERFORMANCE LIGHTING

LUXOR Series

20x60 Metric Backlit Flat Panel

RENO Lighting's Luxor series metric backlit flat panel is a versatile lighting fixture. With even light distribution and a seamless design, the Aim Series technologies allow for numerous configurations of light in one fixture, making it extremely versatile to suit various application needs. This panel is proven efficient and provides uniform light with a long maintenance-free life.



PRODUCT FEATURES

- Easy lay-in installation to fit 501mm x 1,517mm metric ceiling systems or Suspended Installation
- Backlit technology that offers even light distribution without shadowing
- PMMA Lens prevents yellowing
- Available in 20x60 (Metric)
- Damp location suitable
- Rated Lifespan: L70 ~100,000 hrs
- Operational Temperature: -4°F to +122°F (-20°C to +50°C)
- 10 year limited warranty
- Can be used as an emergency backup unit powered by the RENO-EM-H15 Emergency LED Driver

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable Wattages 30/40/50/60W
Sizes	501mm x 1,517 mm (Metric)
Power Factor	>0.85
CCT	Selectable CCT 35/40/5000K
CRI	>80
Lumens	Up to 8,725 lm
Beam Angle	125°
Dimming	0-10V
Mounting	T-Grid, Suspension
Applications	Commercial, Residential, Warehouse, Retail Facilities


 EMERGENCY
 BACKUP READY

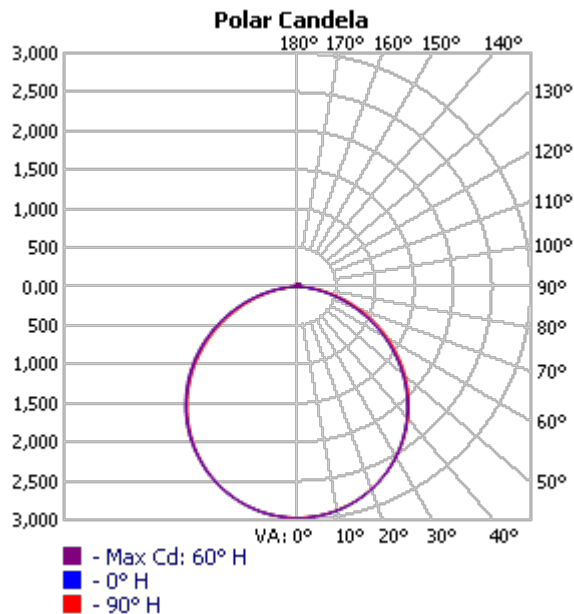

SPECIFICATIONS – 20X60 (METRIC) MULTI POWER (30/40/50/60W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R35308	RENO-2060BLPL-UNV/347-MWMCCT	30W	120-347V	4,417 lm	147 lm/W	3500K
				4,465 lm	149 lm/W	4000K
				4,462 lm	148 lm/W	5000K
		40W	120-347V	5,763 lm	144 lm/W	3500K
				5,908 lm	148 lm/W	4000K
				5,871 lm	147 lm/W	5000K
		50W	120-347V	7,290 lm	145 lm/W	3500K
				7,448 lm	149 lm/W	4000K
				7,320 lm	146 lm/W	5000K
		60W	120-347V	8,522 lm	142 lm/W	3500K
				8,725 lm	145 lm/W	4000K
				8,605 lm	143 lm/W	5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R35308	RENO-2060BLPL-UNV/347-MWMCCT	Low-Bay Luminaires for Commercial and Industrial Buildings	–	S-VC29GK

PHOTOMETRICS – 60W @ 4K



ACCESSORIES – MOUNTING



R39204
 RENO-RP-ROPE
 Aircraft Suspension Cable

Order#	Model	Description
R39204	RENO-RP-ROPE	Aircraft Suspension Cable for 20x60 fixture

ACCESSORIES – EMERGENCY LED DRIVERS



R83001
 RENO-EM-H15
 Emergency LED Driver
 (100-347V AC, 50-60Hz, 15W)

Order#	Model	Description
R83001	RENO-EM-H15	Emergency LED Driver (100-347V AC, 50-60Hz, 15W)

DIMENSIONS

