

Date		Project	
Type		Part Number	



THE EVERYDAY COMPETITIVE OPTION

HELIOS Series

Slim Body Wraparound Fixture

The Helios series embraces a minimalist design while providing a wide array of features making this fixture adaptable to any indoor application. Utilize the colour and wattage selections built into the fixture to create the perfect look. Easy to install and built to last, this series is sure to impress



PRODUCT FEATURES

- DLC Premium for the Stairwell and Passageway Luminaires
- Surface or Suspension mounting options
- Frosted PMMA Lens
- Includes J-Box Coverplate and V-Hangers
- Damp location suitable
- Rated Lifespan: L70 ~100,000 hrs
- Operating temperature: -13°F to 104°F (-25°C to 40°C)
- 5 year warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable Wattage: 2ft - 15/20/25/30W 4ft - 30/40/50W
Lengths	2ft & 4ft
Power Factor	>0.9
CCT	Selectable: 35/40/5000K
CRI	>80
Lumens	Up to 7,023 lm
Beam Angle	120°
Dimming	0-10V
Mounting	Surface, & Suspension
Applications	Commercial, Industrial, Warehouse, Retail Facilities



STANDALONE
SENSOR OPTIONS



EMERGENCY
BACKUP READY



RENO SMART
NLC SYSTEM



SPECIFICATIONS - 2FT 15/20/25/30W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R38005	RENO-HWR2-DV-MW-MCCT-ECO	15W	120-347V	2,222 lm	148 lm/W	3500K
				2,237 lm	149 lm/W	4000K
				2,257 lm	150 lm/W	5000K
		20W		2,903 lm	145 lm/W	3500K
				2,950 lm	147 lm/W	4000K
				2,945 lm	147 lm/W	5000K
		25W		3,598 lm	143 lm/W	3500K
				3,708 lm	148 lm/W	4000K
				3,670 lm	146 lm/W	5000K
		30W		4,183 lm	139 lm/W	3500K
				4,357 lm	145 lm/W	4000K
				4,293 lm	143 lm/W	5000K


SPECIFICATIONS - 4FT 30/40/50W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	
R38011	RENO-HWR4-DV-MW-MCCT-ECO	30W	120-347V	4,183 lm	139 lm/W	3500K	
				4,357 lm	145 lm/W	4000K	
				4,293 lm	143 lm/W	5000K	
		40W		120-347V	5,514 lm	137 lm/W	3500K
					5,697 lm	142 lm/W	4000K
					5,640 lm	141 lm/W	5000K
		50W		120-347V	6,726 lm	134 lm/W	3500K
					7,023 lm	140 lm/W	4000K
					6,905 lm	138 lm/W	5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R38005	RENO-HWR2-DV-MW-MCCT-ECO	Direct Linear Ambient Luminaires	S-KGQD97	–
		Stairwell and Passageway	–	S-CSQ3M9
R38011	RENO-HWR4-DV-MW-MCCT-ECO	Luminaires for Ambient Lighting	S-6S9FTK	–
		Low-Bay Luminaires	S-966VKK	–
		Stairwell and Passageway	–	S-7LQC69


ACCESSORIES – MOUNTING



R39204
 RENO-RP
 Suspension Kit

Order#	Model	Description
R39204	RENO-RP	Suspension Kit

ACCESSORIES – EMERGENCY BACKUP




R83004
 RENO-EM-C08
 Emergency LED Driver (100-347V AC, 50-60Hz, 8W)

Order#	Model	Description
R83004	RENO-EM-C08	Internal Mount Emergency LED Driver (100-347V AC, 50-60Hz, 8W)


ACCESSORIES – STANDALONE SENSORS




R72003
RENO-SENSOR-PIR-H-ON/OFF
PIR Sensor



R74002
RENO-SENSOR-PIR-H-EX
PIR Sensor



R75101
RENO-RS-JK-AD-ANNN
Universal Sensor Adaptor with
internal driver

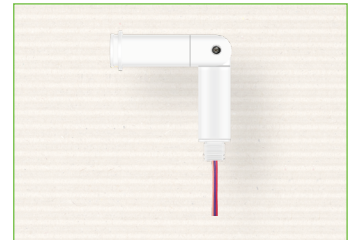


R75103
RENO-RS-JK-AD-CORD-L
Adjustable 3.5mm Jack to
Hardwire " L " Angle Adaptor



R74004
RENO-SENSOR-PIR3.5-PH15M
Long Detection Range PIR
Sensor



R73002
RENO-REMOTE-H
Remote Control for Standalone
Sensors (With Screen)
Note: Only 1 needed per
project.



R73005
RENO-REMOTE-H-ECO
Remote Control for Standalone
sensors (Without Screen)
Note: Only 1 needed per
project

Order#	Model	Description
R72003	RENO-SENSOR-PIR-H-ON/OFF	PIR Sensor
R74002	RENO-SENSOR-PIR-H-EX	PIR Sensor
R75101	RENO-RS-JK-AD-ANNN	Universal Sensor Adaptor with internal driver
R75103	RENO-RS-JK-AD-CORD-L	Adjustable 3.5mm Jack to Hardwire " L " Angle Adaptor
R74004	RENO-SENSOR-PIR3.5-PH15M	Long Detection Range PIR Sensor
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project


ACCESSORIES – RENO SMART NLC SYSTEM




R75001
 RENO-RS-JK-BPDN-12V
 Bluetooth PIR sensor



R75002
 RENO-RS-JK-BMWM-12V
 Bluetooth microwave sensor



R75101
 RENO-RS-JK-AD-ANNN
 Universal Sensor Adaptor with
 internal driver



R75103
 RENO-RS-JK-AD-CORD-L
 Adjustable 3.5mm Jack to
 Hardwire " L " Angle Adaptor



R75201
 RENO-RS-GW-BCNW
 Bluetooth Ceiling mounted
 gateway



R75301
 RENO-RS-RC-BNNN
 Bluetooth Reset remote
 controller





R75302
 RENO-RS-RC-BNNG
 Bluetooth 7-Key Smart Wall
 Switch



Order#	Model	Description
R75001	RENO-RS-JK-BPDN-12V	Bluetooth PIR sensor
R75002	RENO-RS-JK-BMWM-12V	Bluetooth microwave sensor
R75101	RENO-RS-JK-AD-ANNN	Universal Sensor Adaptor with internal driver
R75103	RENO-RS-JK-AD-CORD-L	Adjustable 3.5mm Jack to Hardwire " L " Angle Adaptor
R75201	RENO-RS-GW-BCNW	Bluetooth Ceiling mounted gateway
R75301	RENO-RS-RC-BNNN	Bluetooth Reset remote controller
R75302	RENO-RS-RC-BNNG	Bluetooth 7-Key Smart Wall Switch

****All Reno Smart Sensors are programmed/commissioned using our Reno Smart App**

PHOTOMETRICS - 2FT 25W/4K

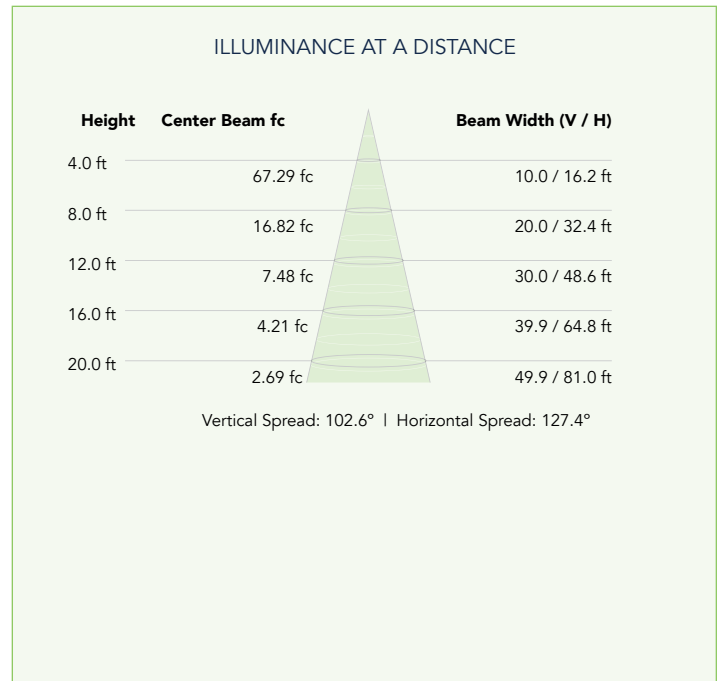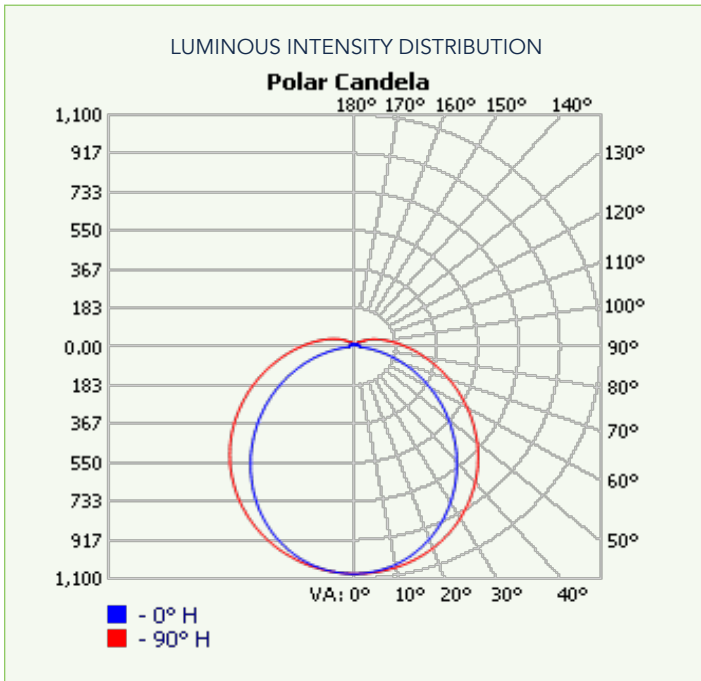


PHOTOMETRICS - 4FT 50W/4K

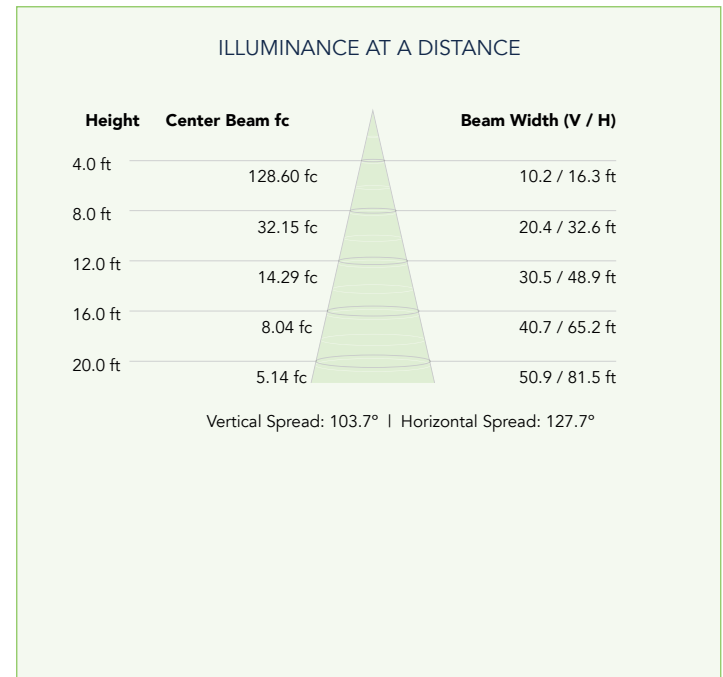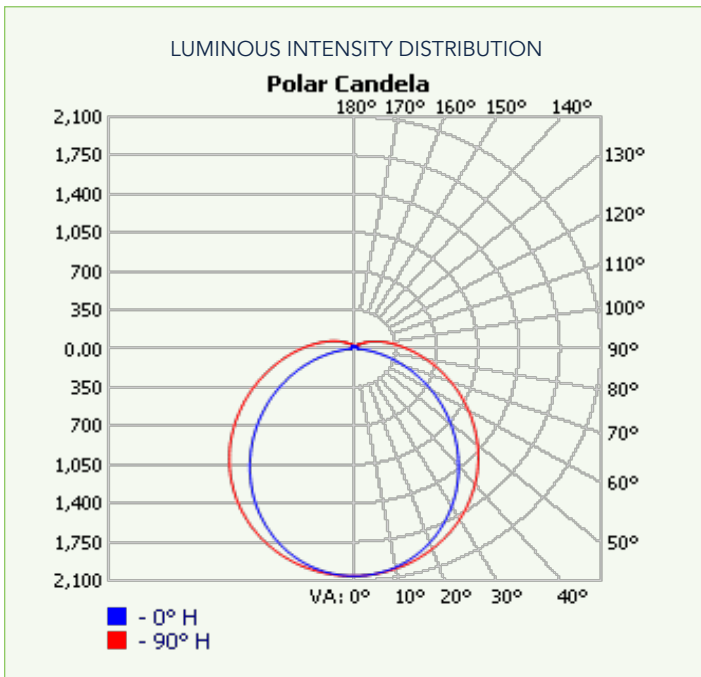

DIMENSIONS


2FT

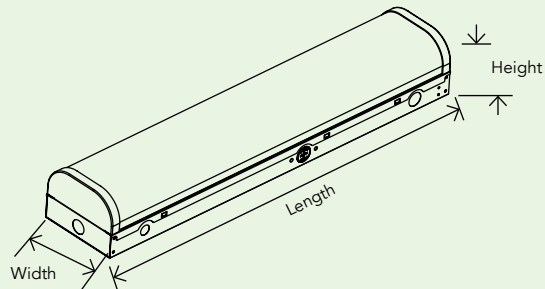

Width: 5.2" (132 mm)
Height: 3.8" (97 mm)
Length: 24" (610 mm)

Weight: 3 lbs (1.36 kg)

4FT

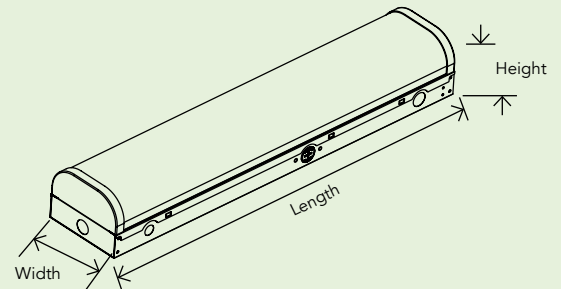

Width: 5.2" (132 mm)
Height: 3.8" (97 mm)
Length: 48" (1219 mm)

Weight: 5 lbs (2.26 kg)