



Date		Project	
Type		Part Number	


ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

# ZETA Series

## Aluminum Commercial Downlight



RENO Lighting's Aluminium Reflector Multifunctional Downlight is a high-performance, commercial-grade fixture designed for versatile lighting applications. The fixture includes adjustable wattages and color temperatures for tailored lighting, and supports both 0-10V and TRIAC dimming, providing flexible control options to meet a wide range of lighting needs.

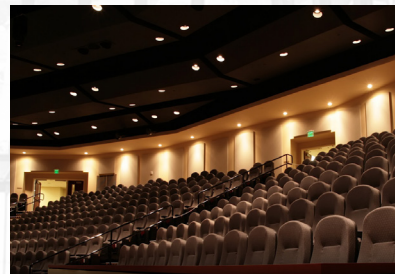

### Product Features

- Energy-Star, JA8 compliant
- Suitable for Type-IC on models: 4", 6", 8" & 10"
- Aluminum Can with Polycarbonate Lens
- External spring arms install to mounting surface without the need for a traditional recessed can
- Flexibility in Dimming Control: Supports both 0-10V and TRIAC dimming (120V)
- Damp location rated (Wet location under covered ceiling)
- Operating temperature: -4°F to 113°F
- Rated Lifetime L70(hrs): >50,000 (-20°C to 45°C)
- 10 year limited warranty

### Key Specifications

<b>Voltage</b>	120-347V
<b>Wattage</b>	Selectable Wattage: 4" - 6/9/13W 6" - 10/16/27W 8" - 18/27/36W 10" - 20/30/40W
<b>Efficacy</b>	Up to 110 lm/W
<b>CCT</b>	Selectable: 27/30/35/40/5000K
<b>CRI</b>	>93
<b>Lumens</b>	Up to 4,001 lm
<b>Beam Angle</b>	4" - 89° 6/8/10" - 97°
<b>Dimming</b>	0-10V & TRIAC 120V
<b>Mounting</b>	Recessed Ceiling
<b>Applications</b>	Office, Lobbies, Commercial, Retail Facilities





# ZETA Series | Aluminum Commercial Downlight

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

## Specifications - 4" 6/9/13W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R36221	RENO-DL4-MW-DV-MCCT-AL	6W	120-347V	606 lm	101 lm/W	2700K
				618 lm	103 lm/W	3000K
				630 lm	105 lm/W	3500K
				660 lm	110 lm/W	4000K
				661 lm	110 lm/W	5000K
		9W	120-347V	909 lm	101 lm/W	2700K
				927 lm	103 lm/W	3000K
				945 lm	105 lm/W	3500K
				990 lm	110 lm/W	4000K
				991 lm	110 lm/W	5000K
		13W	120-347V	1,313 lm	101 lm/W	2700K
				1,339 lm	103 lm/W	3000K
				1,365 lm	105 lm/W	3500K
				1,430 lm	110 lm/W	4000K
				1,430 lm	110 lm/W	5000K

## Specifications - 6" 10/16/27W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R36222	RENO-DL6-MW-DV-MCCT-AL	10W	120-347V	910 lm	91 lm/W	2700K
				930 lm	93 lm/W	3000K
				950 lm	95 lm/W	3500K
				1,000 lm	100 lm/W	4000K
				1,001 lm	100 lm/W	5000K
		16W	120-347V	1,456 lm	91 lm/W	2700K
				1,488 lm	93 lm/W	3000K
				1,520 lm	95 lm/W	3500K
				1,600 lm	100 lm/W	4000K
				1,601 lm	100 lm/W	5000K
		27W	120-347V	2,457 lm	91 lm/W	2700K
				2,511 lm	93 lm/W	3000K
				2,565 lm	95 lm/W	3500K
				2,700 lm	100 lm/W	4000K
				2,701 lm	100 lm/W	5000K



# ZETA Series | Aluminum Commercial Downlight

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

## Specifications - 8" 18/27/36W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R36223	RENO-DL8-MW-DV-MCCT-AL	18W	120-347V	1,638 lm	91 lm/W	2700K
				1,674 lm	93 lm/W	3000K
				1,710 lm	95 lm/W	3500K
				1,800 lm	100 lm/W	4000K
				1,801 lm	100 lm/W	5000K
		27W	120-347V	2,457 lm	91 lm/W	2700K
				2,511 lm	93 lm/W	3000K
				2,565 lm	95 lm/W	3500K
				2,700 lm	100 lm/W	4000K
				2,701 lm	100 lm/W	5000K
		36W	120-347V	3,276 lm	91 lm/W	2700K
				3,348 lm	93 lm/W	3000K
				3,420 lm	95 lm/W	3500K
				3,600 lm	100 lm/W	4000K
				3,601 lm	100 lm/W	5000K

## Specifications - 10" 20/30/40W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R36224	RENO-DL10-MW-DV-MCCT-AL	20W	120-347V	1,820 lm	91 lm/W	2700K
				1,860 lm	93 lm/W	3000K
				1,900 lm	95 lm/W	3500K
				2,000 lm	100 lm/W	4000K
				2,001 lm	100 lm/W	5000K
		30W	120-347V	2,730 lm	91 lm/W	2700K
				2,790 lm	93 lm/W	3000K
				2,850 lm	95 lm/W	3500K
				3,000 lm	100 lm/W	4000K
				3,001 lm	100 lm/W	5000K
		40W	120-347V	3,640 lm	91 lm/W	2700K
				3,720 lm	93 lm/W	3000K
				3,800 lm	95 lm/W	3500K
				4,000 lm	100 lm/W	4000K
				4,001 lm	100 lm/W	5000K






# ZETA Series | Aluminum Commercial Downlight

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

## Accessories - Mounting

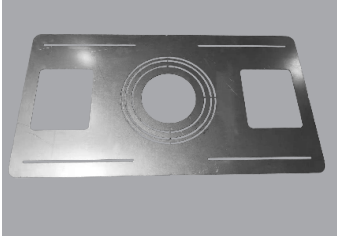


R39230  
RENO-MP-DL-4N1  
4in1 Mounting Plate



R39231  
RENO-GF-DL-4  
Goof Ring for 4" Commercial  
Downlight



R39232  
RENO-GF-DL-6  
Goof Ring for 6" Commercial  
Downlight

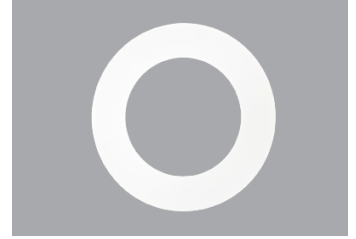

R39233  
RENO-GF-DL-8  
Goof Ring for 8" Commercial  
Downlight



R39234  
RENO-GF-DL-10  
Goof Ring for 10" Commercial  
Downlight

Order#	Model	Description
R39230	RENO-MP-DL-4N1	4 in 1 Mounting Plate
R39231	RENO-GF-DL-4	Goof Ring for 4" Commercial Downlight
R39232	RENO-GF-DL-6	Goof Ring for 6" Commercial Downlight
R39233	RENO-GF-DL-8	Goof Ring for 8" Commercial Downlight
R39234	RENO-GF-DL-10	Goof Ring for 10" Commercial Downlight






# ZETA Series | Aluminum Commercial Downlight

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

## Dimensions

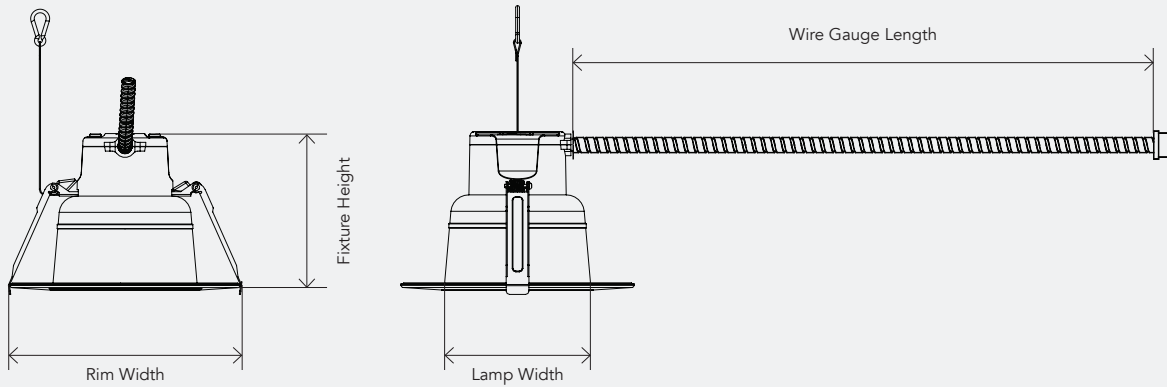

	4.0"	6.0"	8.0"	10.0"
<b>Lamp Width Ø:</b>	4.13" (105 mm)	5.36" (136 mm)	6.54" (166 mm)	7.45" (129 mm)
<b>Rim Width Ø:</b>	5.91" (150 mm)	8.27" (210 mm)	10.24" (260 mm)	11.22" (285 mm)
<b>Fixture Height:</b>	5.57" (141.5 mm)	5.62" (142.75 mm)	6.29" (160 mm)	6.76" (171.75 mm)
<b>Wire Gauge Length:</b>	25.59" (650 mm)	25.59" (650 mm)	25.59" (650 mm)	25.59" (650 mm)
<b>Min. Cut-out Ø:</b>	4.33" (110 mm)	5.91" (150 mm)	7.48" (190 mm)	8.27" (210 mm)
<b>Max. Cut-out Ø:</b>	5.51" (140 mm)	7.48" (190 mm)	9.45" (240 mm)	10.24" (260 mm)
<b>Weight:</b>	1.08 lbs (0.49 kg)	1.32 lbs (0.6 kg)	1.65 lbs (0.75 kg)	1.96 lbs (0.89 kg)

