

Date		Project	
Type		Part Number	




ALL-IN-ONE PERFORMANCE LIGHTING

ZETA Series

Commercial Downlights

RENO's Multifunctional Downlight is a commercial grade downlight fixture. This Energy Star qualified downlight with integrated driver, designed as an energy efficient lighting solution for the Commercial's popular 4"/6"/8"/10" recessed downlight fixtures. Features Dual Voltage 120-347V and easy installation with adjustable wattages and colour temperature.



PRODUCT FEATURES

- EnergyStar Certified
- JA8 Compliant
- Flexibility in Dimming Control: Supports both 0-10V and TRIAC dimming (120V)
- Suitable for Type-IC on models: 4", 6", & 8"
- External spring arms install to mounting surface without the need for a traditional recessed can
- 25.5" (650mm) BX Whip
- Frosted Polycarbonate Lens
- ABS Trim and Body
- Operating temperature: -13°F to +113°F (-25°C to +45°C)
- Damp location suitable (Wet location under covered ceiling)
- Rated Lifespan: L70 ~50,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable Wattage 4" - 9/13/18W 6" - 10/16/27W 8" - 18/27/36W 10" - 20/30/40W
Size	4", 6", 8", 10"
Power Factor	>0.9
CCT	27/30/35/40/5000K
CRI	>93
Lumens	Up to 5,000 lm
Beam Angle	95°
Dimming	0-10V, 120V TRIAC
Mounting	Recessed Ceiling
Applications	Commercial, Residential, Warehouse, Retail Facilities



SPECIFICATIONS – 4" MULTI POWER (9/13/18W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R39205	RENO-DL4-MW-DV-MCCT-G2	9W	120-347V	909 lm	101 lm/W	2700K
				927 lm	103 lm/W	3000K
				945 lm	105 lm/W	3500K
				999 lm	111 lm/W	4000K
				1,000 lm	111 lm/W	5000K
		13W	120-347V	1,313 lm	101 lm/W	2700K
				1,339 lm	103 lm/W	3000K
				1,365 lm	105 lm/W	3500K
				1,443 lm	111 lm/W	4000K
				1,444 lm	111 lm/W	5000K
		18W	120-347V	1,818 lm	101 lm/W	2700K
				1,854 lm	103 lm/W	3000K
				1,890 lm	105 lm/W	3500K
				1,998 lm	111 lm/W	4000K
				1,999 lm	111 lm/W	5000K

SPECIFICATIONS – 6" MULTI POWER (10/16/27W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R39206	RENO-DL6-MW-DV-MCCT-G2	10W	120-347V	1,010 lm	101 lm/W	2700K
				1,030 lm	103 lm/W	3000K
				1,050 lm	105 lm/W	3500K
				1,110 lm	111 lm/W	4000K
				1,111 lm	111 lm/W	5000K
		16W	120-347V	1,616 lm	101 lm/W	2700K
				1,648 lm	103 lm/W	3000K
				1,680 lm	105 lm/W	3500K
				1,776 lm	111 lm/W	4000K
				1,777 lm	111 lm/W	5000K
		27W	120-347V	2,727 lm	101 lm/W	2700K
				2,781 lm	103 lm/W	3000K
				2,835 lm	105 lm/W	3500K
				2,997 lm	111 lm/W	4000K
				2,998 lm	111 lm/W	5000K


SPECIFICATIONS – 8" MULTI POWER (18/27/36W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R39207	RENO-DL8-MW-DV-MCCT-G2	18W	120-347V	1,818 lm	101 lm/W	2700K
				1,854 lm	103 lm/W	3000K
				1,890 lm	105 lm/W	3500K
				1,998 lm	111 lm/W	4000K
				1,999 lm	111 lm/W	5000K
		27W	120-347V	2,727 lm	101 lm/W	2700K
				2,781 lm	103 lm/W	3000K
				2,835 lm	105 lm/W	3500K
				2,997 lm	111 lm/W	4000K
				2,998 lm	111 lm/W	5000K
		36W	120-347V	3,636 lm	101 lm/W	2700K
				3,708 lm	103 lm/W	3000K
				3,780 lm	105 lm/W	3500K
				3,996 lm	111 lm/W	4000K
				3,997 lm	111 lm/W	5000K


SPECIFICATIONS – 10" MULTI POWER (22/34/45W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R39208	RENO-DL10-MW-DV-MCCT-G2	20W	120-347V	2,300 lm	115 lm/W	2700K
				2,340 lm	117 lm/W	3000K
				2,380 lm	119 lm/W	3500K
				2,500 lm	125 lm/W	4000K
				2,500 lm	125 lm/W	5000K
		30W	120-347V	3,390 lm	115 lm/W	2700K
				3,510 lm	117 lm/W	3000K
				3,570 lm	119 lm/W	3500K
				3,750 lm	125 lm/W	4000K
				3,750 lm	125 lm/W	5000K
		40W	120-347V	4,600 lm	115 lm/W	2700K
				4,680 lm	117 lm/W	3000K
				4,760 lm	119 lm/W	3500K
				5,000 lm	125 lm/W	4000K
				5,000 lm	125 lm/W	5000K


MOUNTING ACCESSORIES




R39230
 RENO-MP-DL-4N1
 4in1 Mounting Plate



R39231
 RENO-GF-DL-4
 Goof Ring for 4" Commercial
 Downlight




R39232
 RENO-GF-DL-6
 Goof Ring for 6" Commercial
 Downlight

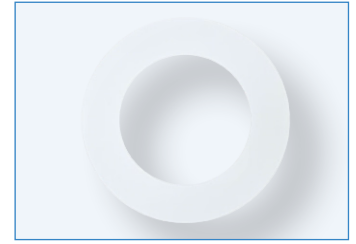


R39233
 RENO-GF-DL-8
 Goof Ring for 8" Commercial
 Downlight




R39234
 RENO-GF-DL-10
 Goof Ring for 10" Commercial
 Downlight




R39901
 RENO-DL4-TM-BN
 4" Trim for Prime Commercial
 Downlight | Brushed Nickel




R39902
 RENO-DL4-TM-BK
 4" Trim for Prime Commercial
 Downlight | Black

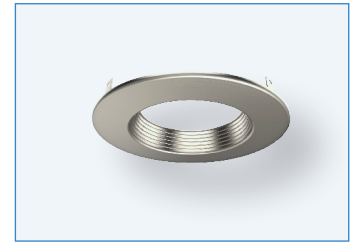


R39903
 RENO-DL6-TM-BN
 6" Trim for Prime Commercial
 Downlight | Brushed Nickel




R39904
 RENO-DL6-TM-BK
 6" Trim for Prime Commercial
 Downlight | Black




R39905
 RENO-DL8-TM-BN
 8" Trim for Prime Commercial
 Downlight | Brushed Nickel



R39906
 RENO-DL8-TM-BK
 8" Trim for Prime Commercial
 Downlight | Black

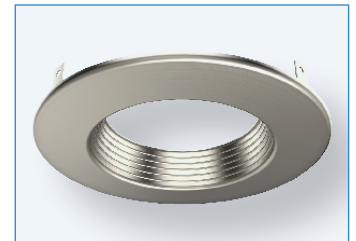





R39907
 RENO-DL10-TM-BN
 10" Trim for Prime Commercial
 Downlight | Brushed Nickel



R39908
 RENO-DL10-TM-BK
 10" Trim for Prime Commercial
 Downlight | Black

Order#	Model	Description
R39230	RENO-MP-DL-4N1	4in1 Mounting Plate
R39231	RENO-GF-DL-4	Goof Ring for 4" Commercial Downlight
R39232	RENO-GF-DL-6	Goof Ring for 6" Commercial Downlight
R39233	RENO-GF-DL-8	Goof Ring for 8" Commercial Downlight
R39234	RENO-GF-DL-10	Goof Ring for 10" Commercial Downlight
R39901	RENO-DL4-TM-BN	4" Trim for Prime Commercial Downlight Brushed Nickel
R39902	RENO-DL4-TM-BK	4" Trim for Prime Commercial Downlight Black
R39903	RENO-DL6-TM-BN	6" Trim for Prime Commercial Downlight Brushed Nickel
R39904	RENO-DL6-TM-BK	6" Trim for Prime Commercial Downlight Black
R39905	RENO-DL8-TM-BN	8" Trim for Prime Commercial Downlight Brushed Nickel
R39906	RENO-DL8-TM-BK	8" Trim for Prime Commercial Downlight Black
R39907	RENO-DL10-TM-BN	10" Trim for Prime Commercial Downlight Brushed Nickel
R39908	RENO-DL10-TM-BK	10" Trim for Prime Commercial Downlight Black

DIMENSIONS

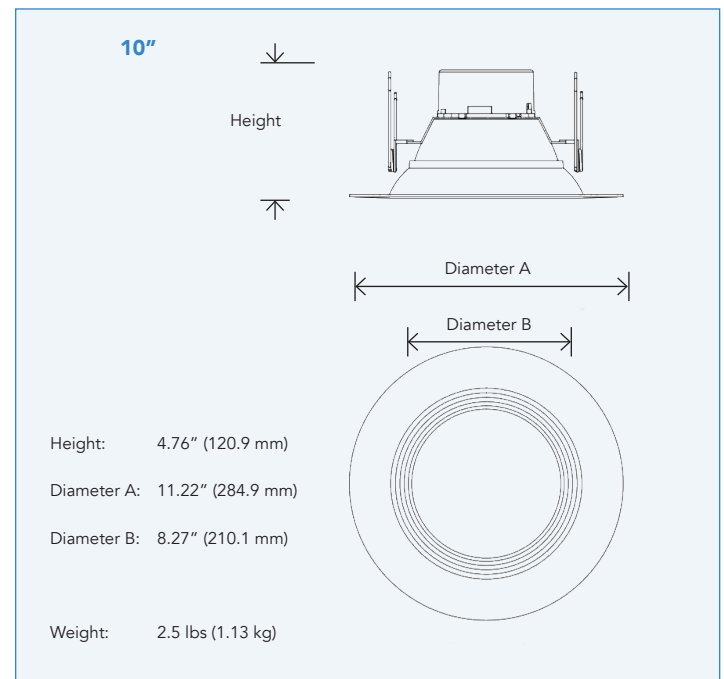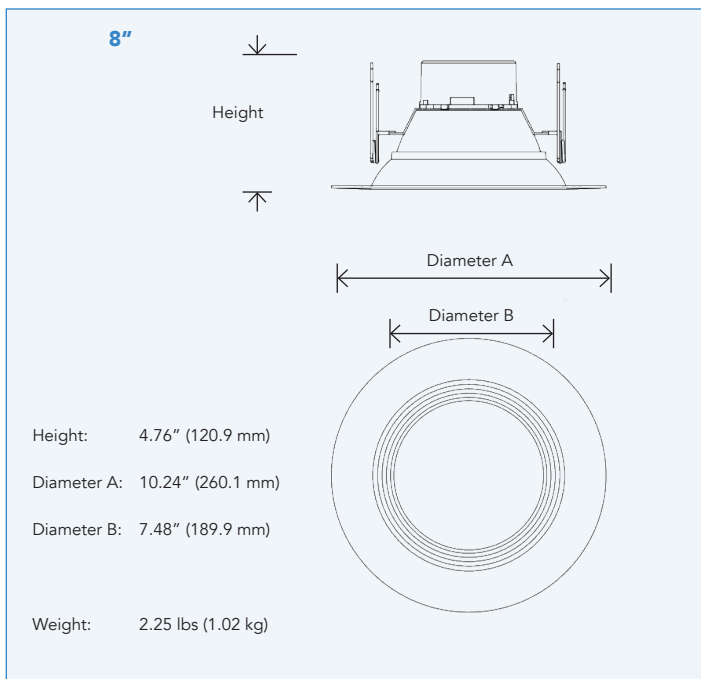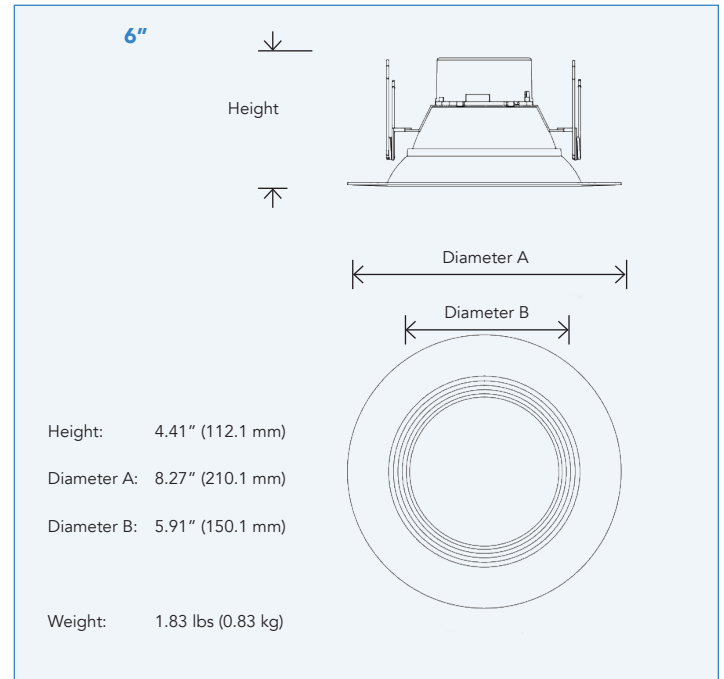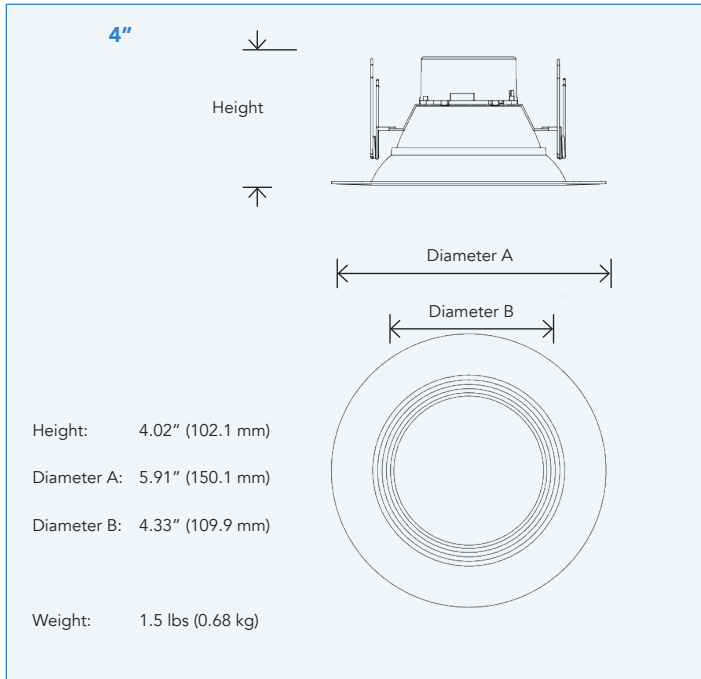

Size	Min. Cut Out	Max. Cut Out
4"	4.33"	5.51"
6"	5.91"	7.48"
8"	7.48"	9.45"
10"	8.27"	10.24"