

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

OPS Series

Security Wall Pack

The OPS Series PRIME Security Wall Pack uses industry-leading LED chips and drivers to deliver a quality, energy saving lighting solution. It is also designed for an easy install, directly fitting onto existing electrical boxes, making it the contractor's choice when replacing older high pressure sodium and metal halide wall packs.



PRODUCT FEATURES

- DLC Premium
- Die-cast Alluminum Body
- Powder coated black
- Custom colors available
- Polycarbonate Lens
- 0-10V dimming control compatible
- Integrated photocell
- Operating temperature: -40°F to +104°F (-40°C to +40°C)
- Multi CCT & Wattage
- Rated Lifespan: L70 ~50,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable - 8/10/15/25W
Power Factor	>0.9
CCT	3000K, 4000K, 5000K
CRI	>70
Lumens	1160-3625lm
Beam Angle	90°
Mounting	Wall
Applications	Commercial, Exterior Parking, Schools, Hospitals



SPECIFICATIONS – MULTI POWER (8/10/15/25W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R51016	RENO-WP-25W-MW-DV-MCCT-SEN	8/10/15/25W	120-347V	1160/1450/ 2175/3625 lm	145 lm/W	30/40/5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R51016	RENO-WP-25W-MW-DV-MCCT-SEN	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	–	S-WH92EY


ACCESSORIES – EMERGENCY LED DRIVERS



R83010
 RENO-EM-EX15
 All Weather Emergency LED
 Driver (100-347V AC, 50-60Hz,
 15W)

Order#	Model	Description
R83010	RENO-EM-EX15	All Weather Emergency LED Driver (100-347V AC, 50-60Hz, 15W)

DIMENSIONS

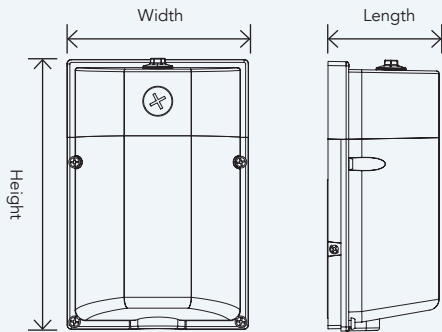

Width: 5.5" (140.6 mm)

Height: 8.2" (208.8 mm)

Length: 3.4" (86.5 mm)

Weight: 2.6 lbs (1.2 kg)