

Date: _____ Project: _____

Type: _____ Part #: _____



OPS Series

Slim Adjustable Wall Pack

The OPS Series PRIME LED Slim Wall Pack is a versatile architectural wall pack with a slim profile that fits almost any outdoor lighting application. Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more.



Product Features

- DLC Premium
- Die-Cast Aluminum body
- Powder coated black
- Custom colours available
- Polycarbonate Lens
- 90 Degree Adjustable
- IP65 Wet Location Rated
- Operating temperature: -40°F to +122°F (-40°C to +50°C)
- Rated Lifespan: L70 ~100,000 hrs
- 10 year limited warranty

Specifications

Voltage	120-347 V (50/60Hz)
Selectable Wattage	R1: 21W / 28W / 35W R2: 45W / 60W / 75W
Selectable CCT	30/40/5,000 K
Power Factor	>0.9
CRI	>0.9
Lumens	R1: Up to 4,989 lm R2: Up to 10,650 lm
Efficacy	R1: Up to 149 lm/W R2: Up to 153 lm/W
Beam Angle	40°
BUG Rating	R1: B2-U1-G1 R2: B3-U2-G1
Dimming	0-10 V
Mounting	Wall
Applications	Commercial, Hospital, Outdoor Parking, School

Specifications - Slim Adjustable Wall Pack : R1

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R51113	RENO-SWP-MW-DV-MCCT-R1	21W	120-347V	2893.6 lm	137.7 lm/W	3,000K
				3133.7 lm	149.2 lm/W	4,000K
				3120.6 lm	148.6 lm/W	5,000K
		28W	120-347V	3714.6 lm	132.6 lm/W	3,000K
				4083.2 lm	145.8 lm/W	4,000K
				4011.6 lm	143.2 lm/W	5,000K
		35W	120-347V	4453.2 lm	127.2 lm/W	3,000K
				4989.2 lm	142.5 lm/W	4,000K
				4939.3 lm	141.1 lm/W	5,000K

Specifications - Slim Adjustable Wall Pack : R2

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R51114	RENO-SWP-MW-DV-MCCT-R2	45W	120-347V	6 388.7 lm	141.9 lm/W	3,000K
				6 922.9 lm	153.8 lm/W	4,000K
				6 860.4 lm	152.4 lm/W	5,000K
		60W	120-347V	7 970.9 lm	132.8 lm/W	3,000K
				8 806.0 lm	146.7 lm/W	4,000K
				8 558.3 lm	142.6 lm/W	5,000K
		75W	120-347V	9 440.1 lm	125.8 lm/W	3,000K
				10 650.2 lm	142.0 lm/W	4,000K
				10 435.9 lm	139.1 lm/W	5,000K

DLC Certification

Order #	Model	Application	DLC Standard	DLC Premium
R51113	RENO-SWP-MW-DV-MCCT-R1	Full-Cutoff Wall-Mounted Area Luminaires	-	S-0EIJPH
R51114	RENO-SWP-MW-DV-MCCT-R2	Full-Cutoff Wall-Mounted Area Luminaires	-	S-LWEC1Z

Accessories

Emergency Drivers / Photocells



**All Weather Emergency
LED Driver**

R83010

RENO-EM-EX15



DC Photocell


R59101

RENO-WP-PS

Order #	Model	Description
R83010	RENO-EM-EX15	External Mount 15W 100-347Vac 50/60Hz 90 mins Backup -20°C to +60°C
R59101	RENO-WP-PS	DC Button Photocell


Dimensions

R51113 | Slim Adjustable Wall Pack : R1

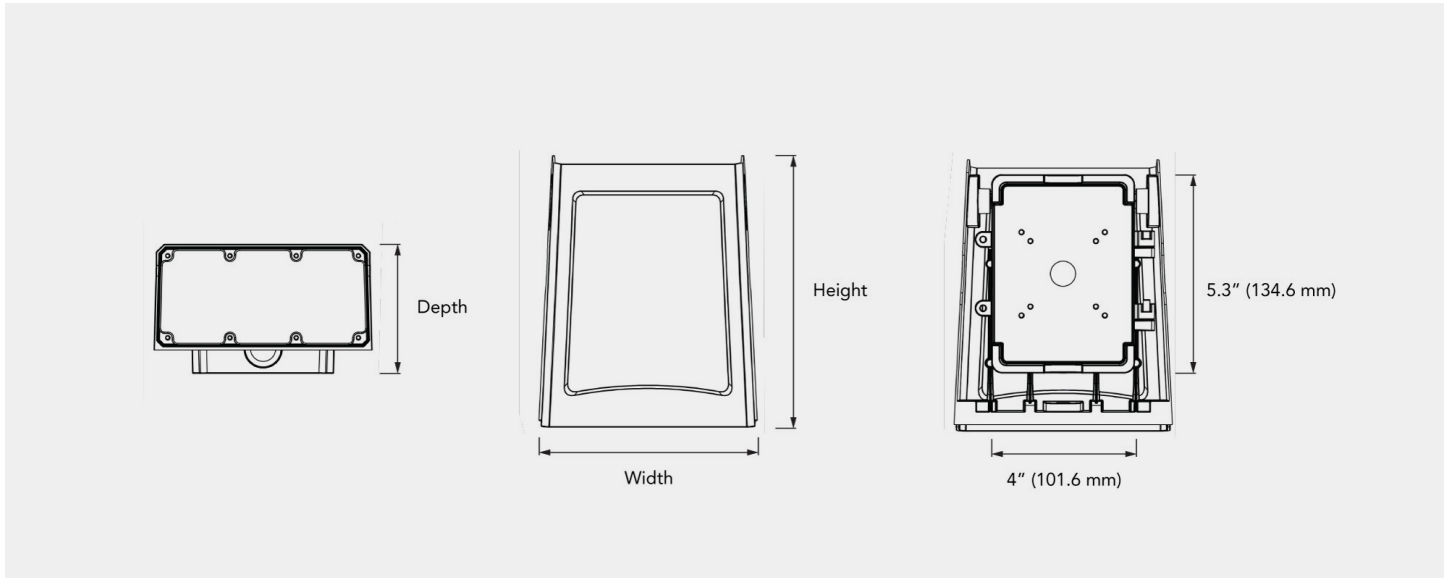

Order #	Model	Width	Height	Depth	Weight
R51113	RENO-SWP-MW-DV-MCCT-R1	6.5" (101.6 mm)	8" (203.2 mm)	3.8" (96.5 mm)	3.7 lbs (1.7 kg)

R51114 | Slim Adjustable Wall Pack : R2

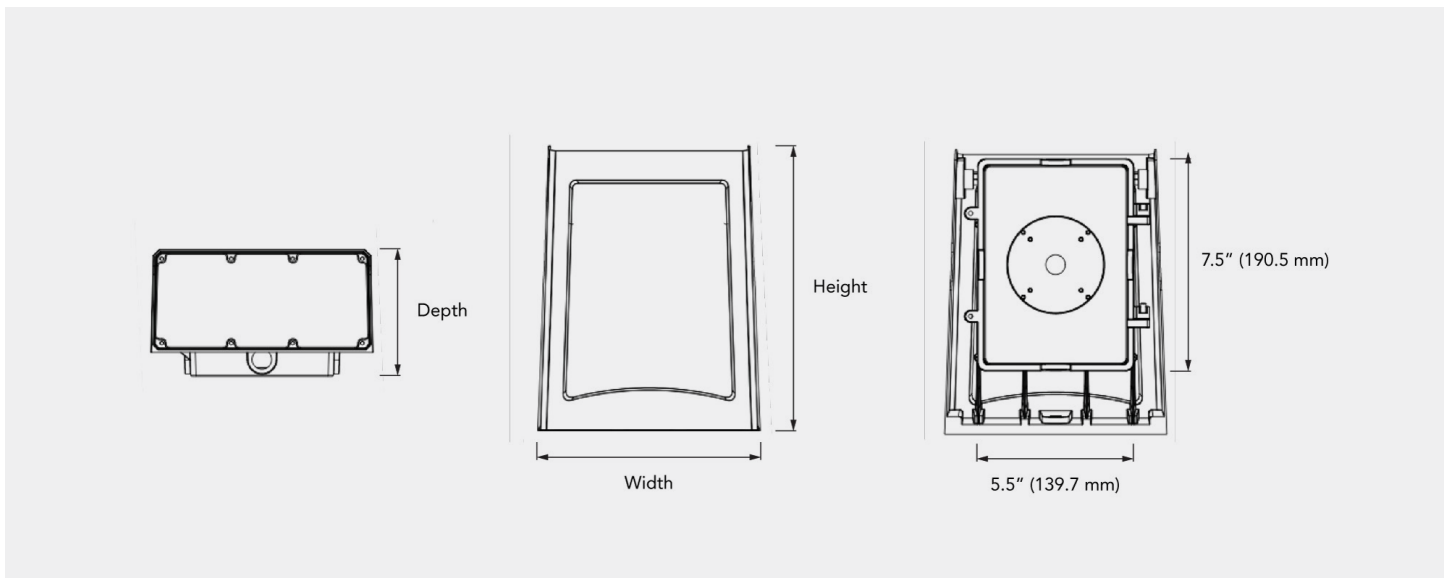

Order #	Model	Width	Height	Depth	Weight
R51114	RENO-SWP-MW-DV-MCCT-R2	8.5" (215.9 mm)	11" (279.4 mm)	4.8" (121.9 mm)	5.2 lbs (2.4 kg)