


Date		Project	
Type		Part Number	


 ALL-IN-ONE PERFORMANCE LIGHTING

ARIES Series

Flood Light

The ARIES Series PRIME LED RENO's compact flood lights are water resistant rated at IP66. Creating bright, security and spot lighting for a variety of applications such as perimeter, entryway, facades, landscapes, retail and residential complexes and architectural lighting. Can mount in almost any angle with a Yoke-style arm and Knuckle Mount.



PRODUCT FEATURES

- DLC Premium
- Unique Design, Strong Extruded Lamp Body
- UL/cUL, DLC 5.1 Premium Listed
- Rated Lifespan: L70 >50,000 hrs
- Powder-coated Black finish
- Built-in Photocell
- 3FT Cord Included
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable - R1 - 10W / 20W / 35W R2 - 15W / 30W / 55W R3 - 30W / 55W / 75W
Power Factor	>0.9
CCT	3000K, 4000K, 5000K
CRI	>80
Lumens	Up to 10,266 lm
Beam Angle	120°
Mounting	Knuckle, Yoke Mount
Applications	Commercial, Parking, Walkways

SPECIFICATIONS – R1 KNUCKLE MOUNT MULTI POWER (10/20/35W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R54012	RENO-FL-MCCT-DV-KN-R1	10W	120-347V	1347 lm	134.7 lm/W	3000K
				1374 lm	137.4 lm/W	4000K
				1383 lm	138.3 lm/W	5000K
		20W	120-347V	2485 lm	124.3 lm/W	3000K
				2594 lm	129.7 lm/W	4000K
				2572 lm	128.6 lm/W	5000K
		35W	120-347V	3441 lm	98.3 lm/W	3000K
				3660 lm	104.6 lm/W	4000K
				3579 lm	102.3 lm/W	5000K

SPECIFICATIONS – R1 YOKE MOUNT MULTI POWER (10/20/35W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R54013	RENO-FL-MCCT-DV-YK-R1	10W	120-347V	1347 lm	134.7 lm/W	3000K
				1374 lm	137.4 lm/W	4000K
				1383 lm	138.3 lm/W	5000K
		20W	120-347V	2485 lm	124.3 lm/W	3000K
				2594 lm	129.7 lm/W	4000K
				2572 lm	128.6 lm/W	5000K
		35W	120-347V	3441 lm	98.3 lm/W	3000K
				3660 lm	104.6 lm/W	4000K
				3579 lm	102.3 lm/W	5000K

SPECIFICATIONS – R2 KNUCKLE MOUNT MULTI POWER (15/30/55W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R54014	RENO-FL-MCCT-DV-KN-R2	15W	120-347V	2084 lm	139 lm/W	3000K
				2123 lm	142 lm/W	4000K
				2144 lm	143 lm/W	5000K
		30W	120-347V	4036 lm	134.5 lm/W	3000K
				4166 lm	138.9 lm/W	4000K
				4136 lm	137.9 lm/W	5000K
		55W	120-347V	6748 lm	122.7 lm/W	3000K
				7081 lm	128.7 lm/W	4000K
				6885 lm	125.2 lm/W	5000K

SPECIFICATIONS – R2 YOKE MOUNT MULTI POWER (15/30/55W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R54015	RENO-FL-MCCT-DV-YK-R2	15W	120-347V	2084 lm	139 lm/W	3500K
				2123 lm	182 lm/W	4000K
				2144 lm	143 lm/W	5000K
		30W	120-347V	4036 lm	134.5 lm/W	3500K
				4166 lm	138.9 lm/W	4000K
				4136 lm	137.9 lm/W	5000K
		55W	120-347V	6748 lm	122.7 lm/W	3500K
				7081 lm	128.7 lm/W	4000K
				6885 lm	125.2 lm/W	5000K

SPECIFICATIONS – R3 KNUCKLE MOUNT MULTI POWER (30/55/75W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R54016	RENO-FL-MCCT-DV-KN-R3	30W	120-347V	4362 lm	145.4 lm/W	3500K
				4521 lm	150.7 lm/W	4000K
				4584 lm	152.8 lm/W	5000K
		55W	120-347V	7584 lm	137.9 lm/W	3500K
				8258 lm	150.1 lm/W	4000K
				8168 lm	148.5 lm/W	5000K
		75W	120-347V	9571 lm	87.6 lm/W	3500K
				10,266 lm	136.9 lm/W	4000K
				10,109 lm	134.8 lm/W	5000K

SPECIFICATIONS – R3 YOKE MOUNT MULTI POWER (30/55/75W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R54017	RENO-FL-MCCT-DV-YK-R3	30W	120-347V	4362 lm	145.4 lm/W	3500K
				4521 lm	150.7 lm/W	4000K
				4584 lm	152.8 lm/W	5000K
		55W	120-347V	7584 lm	137.9 lm/W	3500K
				8258 lm	150.1 lm/W	4000K
				8168 lm	148.5 lm/W	5000K
		75W	120-347V	9571 lm	87.6 lm/W	3500K
				10,266 lm	136.9 lm/W	4000K
				10,109 lm	134.8 lm/W	5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R54012	RENO-FL-MCCT-DV-KN-R1	Architectural Flood and Spot Luminaires	–	S-SQ3OAB
R54013	RENO-FL-MCCT-DV-YK-R1	Architectural Flood and Spot Luminaires	–	S-SQ3OAB
R54014	RENO-FL-MCCT-DV-KN-R2	Architectural Flood and Spot Luminaires	–	S-76PYUM
R54015	RENO-FL-MCCT-DV-YK-R2	Architectural Flood and Spot Luminaires	–	S-76PYUM
R54016	RENO-FL-MCCT-DV-KN-R3	Architectural Flood and Spot Luminaires	–	S-P2A68J
R54017	RENO-FL-MCCT-DV-YK-R3	Architectural Flood and Spot Luminaires	–	S-P2A68J

ACCESSORIES – EMERGENCY LED DRIVERS




R83010
 RENO-EM-EX15
 All Weather Emergency LED
 Driver (100-347V AC, 50-60Hz,
 15W)

Order#	Model	Description
R83010	RENO-EM-EX15	All Weather Emergency LED Driver (100-347V AC, 50-60Hz, 15W)


DIMENSIONS

R1 YOKE

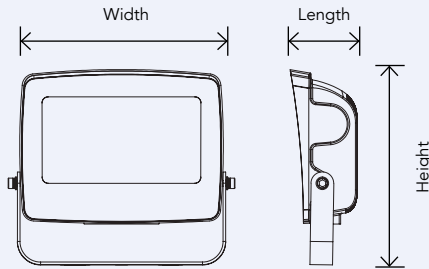


Width: 7.8" (197.6 mm)
 Height: 7.5" (190.5 mm)
 Length: 2.6" (65 mm)
 Weight: 2.8 lbs (1.3 kg)

R1 KNUCKLE

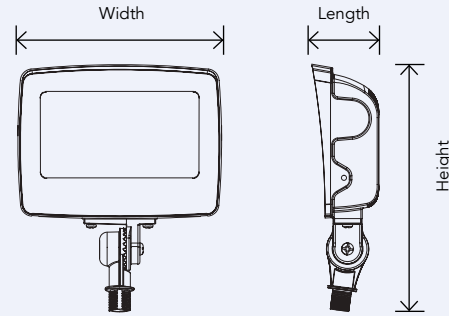


Width: 7.8" (197.6 mm)
 Height: 9.4" (238.8 mm)
 Length: 2.6" (65 mm)
 Weight: 3.1 lbs (1.4 kg)

R2 YOKE

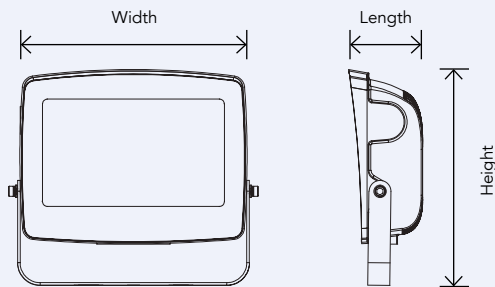

Width: 8.9" (226.1 mm)
 Height: 8.5" (190.5 mm)
 Length: 73.7" (2.9 mm)
 Weight: 4.1 lbs (1.9 kg)


R2 KNUCKLE

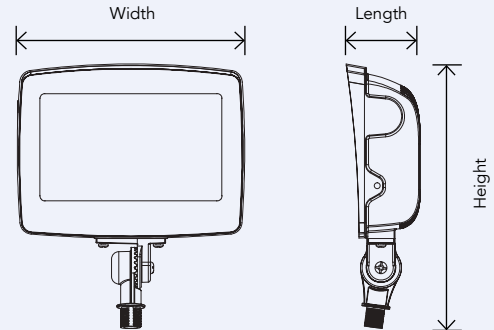

Width: 8.9" (226.1 mm)
 Height: 10.3" (238.8 mm)
 Length: 2.9" (73.7 mm)
 Weight: 3.8 lbs (1.7 kg)


DIMENSIONS CON'T

R3 YOKE

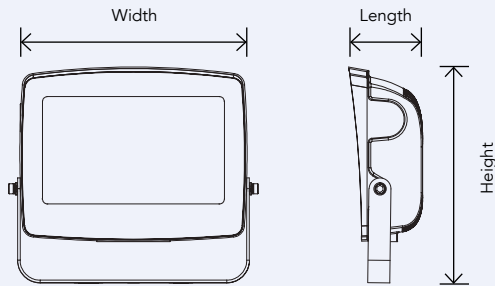

Width: 8.9" (226.1 mm)
 Height: 8.5" (190.5 mm)
 Length: 73.7" (2.9 mm)
 Weight: 4.1 lbs (1.9 kg)

R3 KNUCKLE

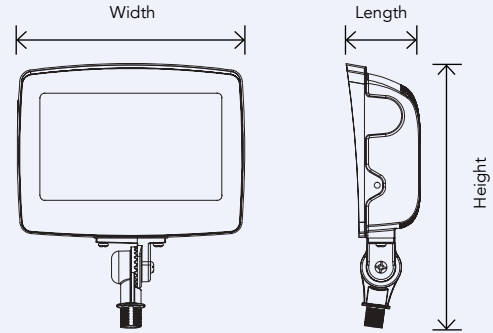

Width: 8.9" (226.1 mm)
 Height: 10.3" (238.8 mm)
 Length: 2.9" (73.7 mm)
 Weight: 4.3 lbs (2 kg)