
Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

STRATOS Series

Architectural Vertical Pendant

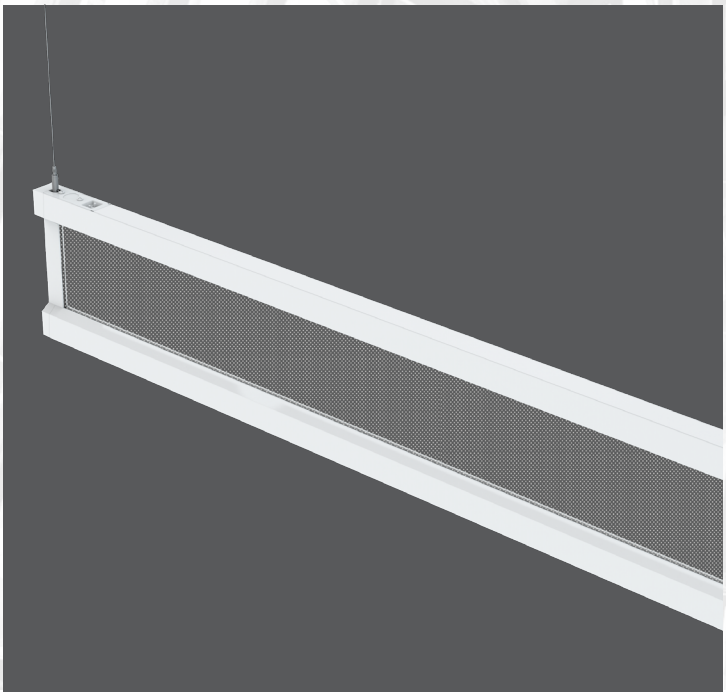

Transform your space with this Architectural Vertical Pendant, engineered to provide glare-free task lighting with a unique illumination design. A unique light guide plate evenly distributes luminous flux, creating a soft, ambient glow. Its seamless design ensures dot-free illumination, replicating the natural brightness and ambiance of a window. Perfect for adding a touch of modern elegance to any designer's concept.





Product Features

- DLC: S-20XK58 Low-Bay Luminaires for Commercial and Industrial Buildings. S-02F4FC: Direct Linear Ambient Luminaires
- Selectable Light Distributions: Up, Down, Up&Down
- Clear polycarbonate light guide provides even, glare-free illumination.
- A sleek white aluminum frame and clear light guide create a sophisticated look, even when unlit.
- Includes Standard, Curved, and Straight End Caps (2 pcs each).
- Suspension mounting with included 10ft aircraft cable kit and 10ft, 5-wire power cord.
- IP20 Damp Location rated
- Operating temp: -4°F to +104°F (-20°C to +45°C)
- Rated lifetime L80: >100,000 hours
- 10 Year Limited Warranty

Key Specifications

Voltage	120-347V
Wattage	40W
Lumens	Up to 4,800 lm
Selectable CCT	**Selectable** 30/35/4000K
Default CCT Setting	4000K
CRI	>90
Beam Angle	120°
Dimming	0-10V
Power Factor	>0.9
THD	<20%
Mounting	Suspension, Row-Mounting (optional accessory)
Application	Commercial, Residential, Offices, Retail Facilities

905-604-4666 | info@renolighting.com | www.renolighting.com
REV.02/05/26

Specifications

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R33421	RENO-ULVP-DV-40W-MCCT-WH	40W	120-347V	4,489 lm	112 lm/W	3000K	White
				4,673 lm	116.8 lm/W	3500K	
				4,755 lm	118.9 lm/W	4000K	
R33422	RENO-ULVP-DV-40W-MCCT-BK	40W	120-347V	4,489 lm	112 lm/W	3000K	Black
				4,673 lm	116.8 lm/W	3500K	
				4,755 lm	118.9 lm/W	4000K	


Accessories

Order#	Model	Description	Finish
R39021	RENO-ULVP-I-WH	*Connection Kit for row-mounting two Vertical Pendants	White
R39022	RENO-ULVP-I-BK	*Connection Kit for row-mounting two Vertical Pendants	Black

*The maximum connection of each input line is: 10 units at 120V, 15 units at 277V, and 15 units at 347V

Photometrics

LUMINOUS INTENSITY DISTRIBUTION (40W 4K)

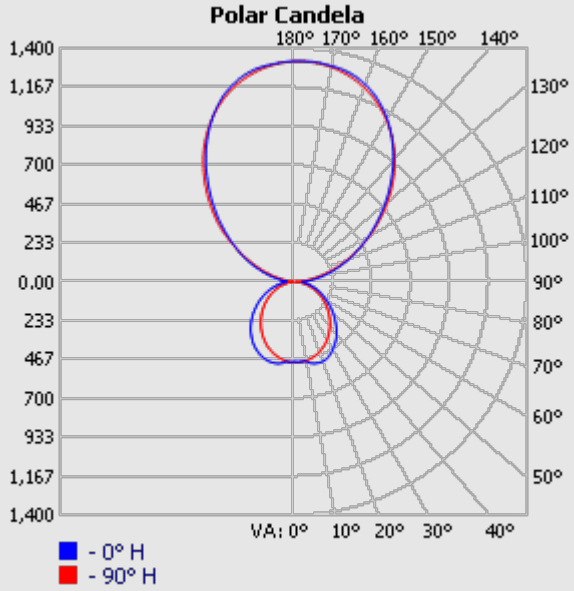


ILLUMINANCE AT A DISTANCE



Vertical Spread: 115.6° | Horizontal Spread: 97.8°


Dimensions

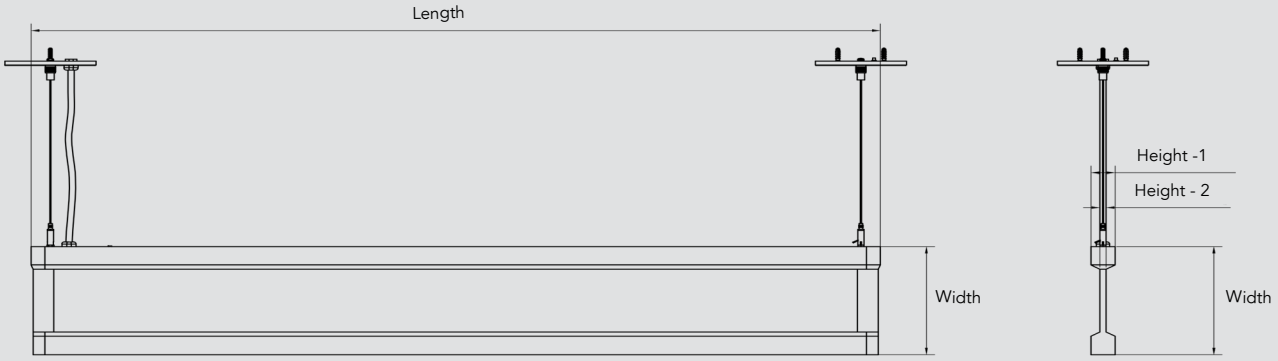

Length:	48.4" (1230 mm)
Height-1:	1.4" (35 mm)
Height-2:	0.4" (9 mm)
Width:	7.6" (192 mm)
Weight:	3.5 lbs (1.58 kg)

Included in Box

R33421

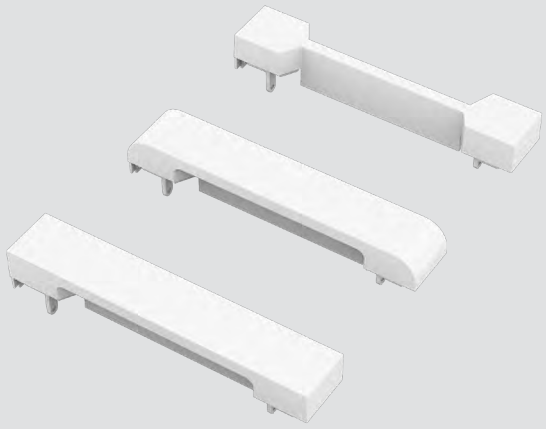

R33422

