


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 153.01 lm/W			
MODEL	4000K	I _{max} (cd)	1324	S/MH(C0/180)	1.19
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	4061.8	η UP,DN(C0-180)	0.0,49.7
NOMINAL FLUX(lm)	4061.76	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

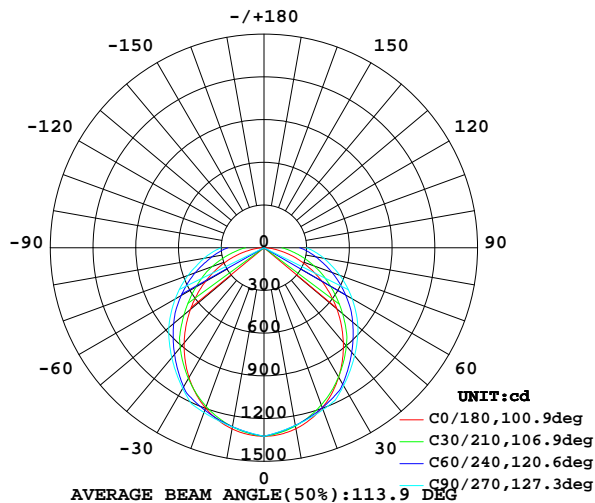

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

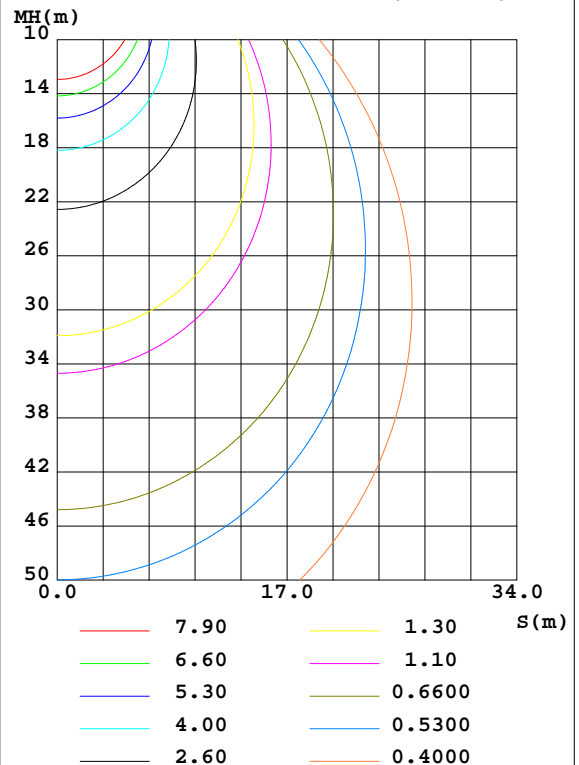

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
5	1315	1300	1295	1299	1315	1303	1301	1303	0- 5	31.34	31.34	0.77,0.77
10	1291	1268	1267	1268	1292	1276	1278	1275	5- 10	92.17	123.5	3.04,3.04
15	1250	1229	1239	1229	1252	1240	1254	1239	10- 15	149.1	272.6	6.71,6.71
20	1196	1183	1211	1185	1199	1198	1231	1198	15- 20	200.7	473.3	11.7,11.7
25	1128	1134	1182	1135	1131	1152	1208	1151	20- 25	246.0	719.3	17.7,17.7
30	1049	1080	1118	1081	1053	1101	1141	1100	25- 30	283.0	1002	24.7,24.7
35	961.2	1015	1054	1016	965.6	1035	1074	1036	30- 35	308.9	1311	32.3,32.3
40	867.4	930.2	990.0	933.3	872.1	949.0	1007	949.3	35- 40	324.6	1636	40.3,40.3
45	768.4	846.5	926.0	850.1	774.2	863.3	940.3	862.1	40- 45	330.7	1966	48.4,48.4
50	668.5	764.2	861.9	768.3	674.9	779.8	873.3	778.2	45- 50	327.9	2294	56.5,56.5
55	568.0	684.8	788.1	689.8	574.4	699.5	796.8	697.0	50- 55	317.0	2611	64.3,64.3
60	468.4	607.0	714.2	613.3	475.1	621.2	720.3	619.0	55- 60	298.2	2910	71.6,71.6
65	370.9	524.9	640.3	530.4	377.2	536.4	643.8	535.2	60- 65	273.0	3182	78.4,78.4
70	276.1	447.0	566.4	451.4	282.9	455.6	567.2	455.4	65- 70	242.7	3425	84.3,84.3
75	185.8	373.3	492.6	376.7	191.2	379.2	490.7	379.6	70- 75	208.9	3634	89.5,89.5
80	103.9	304.9	427.6	306.9	110.1	308.7	427.4	310.0	75- 80	174.1	3808	93.8,93.8
85	40.60	248.8	362.7	247.0	46.47	252.0	364.0	253.1	80- 85	141.5	3950	97.2,97.2
90	12.36	195.6	297.8	190.0	18.21	197.9	300.7	199.2	85- 90	112.0	4062	100,100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.01	.96	.91	.99	.94	.90	.94	.90	.87	.90	.87	.84	.86	.84	.81	.79
2.0	.87	.79	.73	.85	.78	.72	.81	.75	.70	.78	.73	.69	.75	.71	.67	.65
3.0	.76	.67	.60	.74	.66	.59	.71	.64	.58	.68	.62	.57	.66	.61	.56	.54
4.0	.67	.58	.50	.66	.57	.50	.63	.55	.49	.61	.54	.49	.58	.53	.48	.46
5.0	.60	.50	.43	.59	.50	.43	.56	.48	.42	.54	.47	.42	.52	.46	.41	.39
6.0	.54	.44	.38	.53	.44	.37	.51	.43	.37	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.40	.33	.48	.39	.33	.46	.38	.33	.45	.38	.32	.43	.37	.32	.30
8.0	.44	.36	.29	.44	.35	.29	.42	.35	.29	.41	.34	.29	.40	.34	.29	.27
9.0	.41	.32	.27	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.24
10.0	.38	.29	.24	.37	.29	.24	.36	.29	.24	.35	.28	.24	.34	.28	.24	.22

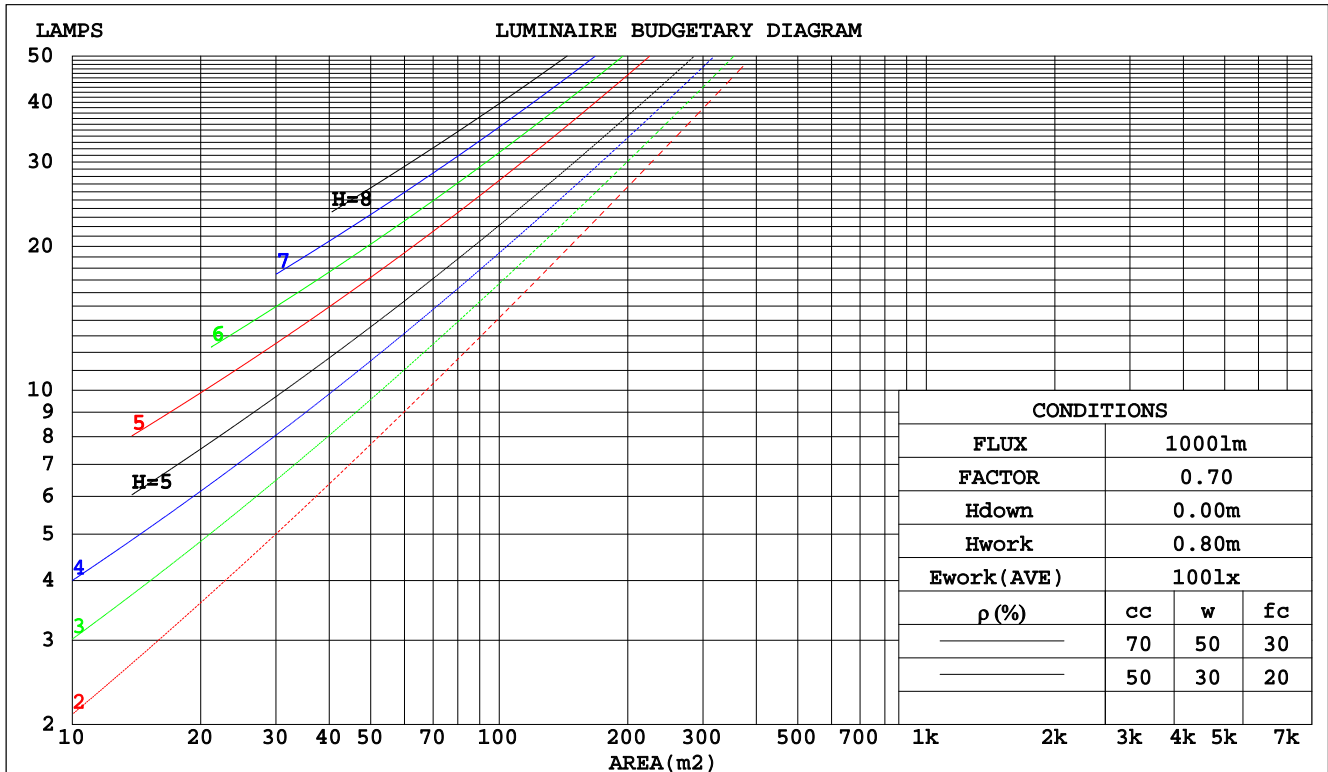

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity: 65.0%
 Test Distance: 8.900m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm					
NAME: MLSN4-28/D10/U/40			TYPE:LED		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:1182*66*14mm		PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.368	.209	.066	.361	.206	.065	.347	.199	.064	.335	.193	.062	.323	.187	.060	
2.0	.326	.178	.055	.319	.176	.054	.307	.171	.053	.296	.166	.052	.286	.162	.051	
3.0	.292	.156	.047	.287	.154	.046	.276	.150	.045	.266	.146	.045	.257	.142	.044	
4.0	.265	.138	.041	.260	.136	.040	.251	.133	.040	.242	.130	.039	.234	.127	.039	
5.0	.242	.123	.036	.238	.122	.036	.229	.119	.035	.222	.117	.035	.214	.115	.034	
6.0	.223	.112	.032	.219	.110	.032	.211	.108	.032	.204	.106	.031	.198	.104	.031	
7.0	.206	.102	.029	.202	.101	.029	.196	.099	.029	.190	.097	.028	.184	.095	.028	
8.0	.191	.093	.026	.188	.093	.026	.182	.091	.026	.177	.090	.026	.172	.088	.026	
9.0	.179	.086	.024	.176	.086	.024	.171	.084	.024	.166	.083	.024	.161	.082	.024	
10.0	.167	.080	.022	.165	.080	.022	.160	.078	.022	.156	.077	.022	.151	.076	.022	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.184	.156	.130	.158	.134	.112	.108	.092	.077	.062	.053	.045	.020	.017	.015	
2.0	.177	.132	.094	.151	.113	.081	.104	.078	.057	.060	.046	.033	.019	.015	.011	
3.0	.169	.114	.071	.145	.099	.062	.099	.069	.043	.057	.040	.025	.018	.013	.008	
4.0	.161	.101	.056	.138	.088	.049	.095	.061	.034	.055	.036	.020	.018	.012	.007	
5.0	.153	.091	.045	.131	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.005	
6.0	.145	.083	.038	.125	.072	.033	.086	.050	.023	.050	.030	.014	.016	.010	.005	
7.0	.138	.076	.032	.119	.066	.028	.082	.046	.020	.048	.027	.012	.015	.009	.004	
8.0	.131	.070	.028	.113	.061	.024	.078	.043	.017	.045	.025	.010	.015	.008	.003	
9.0	.125	.065	.025	.108	.056	.022	.075	.040	.015	.043	.023	.009	.014	.008	.003	
10.0	.119	.061	.022	.103	.053	.019	.071	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm											
NAME: MLSN4-28/D10/U/40					TYPE:LED			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:1182*66*14mm			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		16.5	18.1	16.8	18.3	18.5	18.3	19.9	18.6	20.1	20.3
3H		17.8	19.3	18.1	19.6	19.8	20.6	22.1	20.9	22.3	22.6
4H		18.3	19.8	18.7	20.0	20.3	21.8	23.3	22.2	23.5	23.8
6H		18.7	20.0	19.0	20.3	20.6	23.2	24.5	23.5	24.8	25.1
8H		18.7	20.1	19.1	20.3	20.6	23.9	25.2	24.2	25.5	25.8
12H		18.8	20.0	19.1	20.3	20.7	24.7	26.0	25.1	26.3	26.6
4H 2H		17.5	18.9	17.8	19.2	19.5	18.9	20.3	19.2	20.5	20.8
3H		19.1	20.4	19.5	20.7	21.0	21.4	22.7	21.8	23.0	23.3
4H		19.8	21.0	20.2	21.3	21.6	22.8	24.0	23.2	24.3	24.7
6H		20.3	21.3	20.7	21.7	22.1	24.4	25.4	24.8	25.8	26.2
8H		20.4	21.4	20.9	21.8	22.2	25.3	26.2	25.7	26.6	27.0
12H		20.5	21.4	21.0	21.8	22.2	26.2	27.1	26.7	27.5	27.9
8H 4H		20.7	21.6	21.1	22.0	22.4	23.2	24.1	23.6	24.5	24.9
6H		21.5	22.3	21.9	22.7	23.2	25.0	25.8	25.5	26.2	26.7
8H		21.8	22.6	22.3	23.0	23.4	26.1	26.8	26.5	27.3	27.7
12H		22.1	22.7	22.5	23.2	23.6	27.3	28.0	27.8	28.4	28.9
12H 4H		20.9	21.8	21.4	22.2	22.6	23.2	24.1	23.6	24.5	24.9
6H		21.9	22.7	22.4	23.1	23.6	25.1	25.9	25.6	26.3	26.7
8H		22.4	23.1	22.9	23.5	24.0	26.3	26.9	26.8	27.4	27.9
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 4062 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.9)

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	55	43	36	53	43	36	29
0.80	65	53	45	64	52	45	62	51	44	37
1.00	73	61	53	72	61	53	69	62	53	45
1.25	80	69	61	78	68	60	76	66	60	52
1.50	85	74	66	83	73	66	80	71	65	57
2.00	92	82	75	90	81	74	86	79	73	64
2.50	96	87	80	94	86	79	90	83	78	69
3.00	99	92	85	97	90	84	93	87	82	73
4.00	104	97	92	101	95	90	97	92	88	78
5.00	106	101	96	104	99	94	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

Conical surface Flux(90deg):

1966.4 lm

%lum = 48.4%


%lamp = 48.4%

Conical surface Flux(120deg):

2909.5 lm

%lum = 71.6%

%lamp = 71.6%

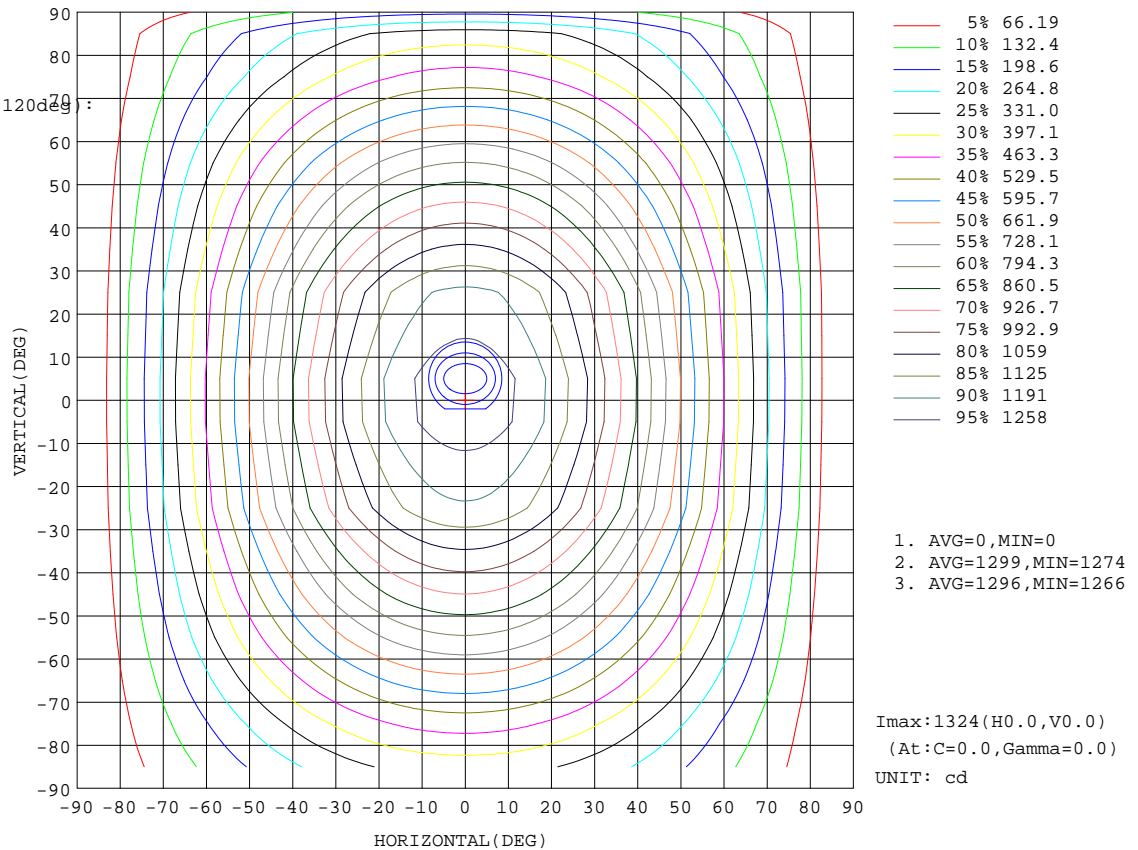


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-06-16

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.900m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

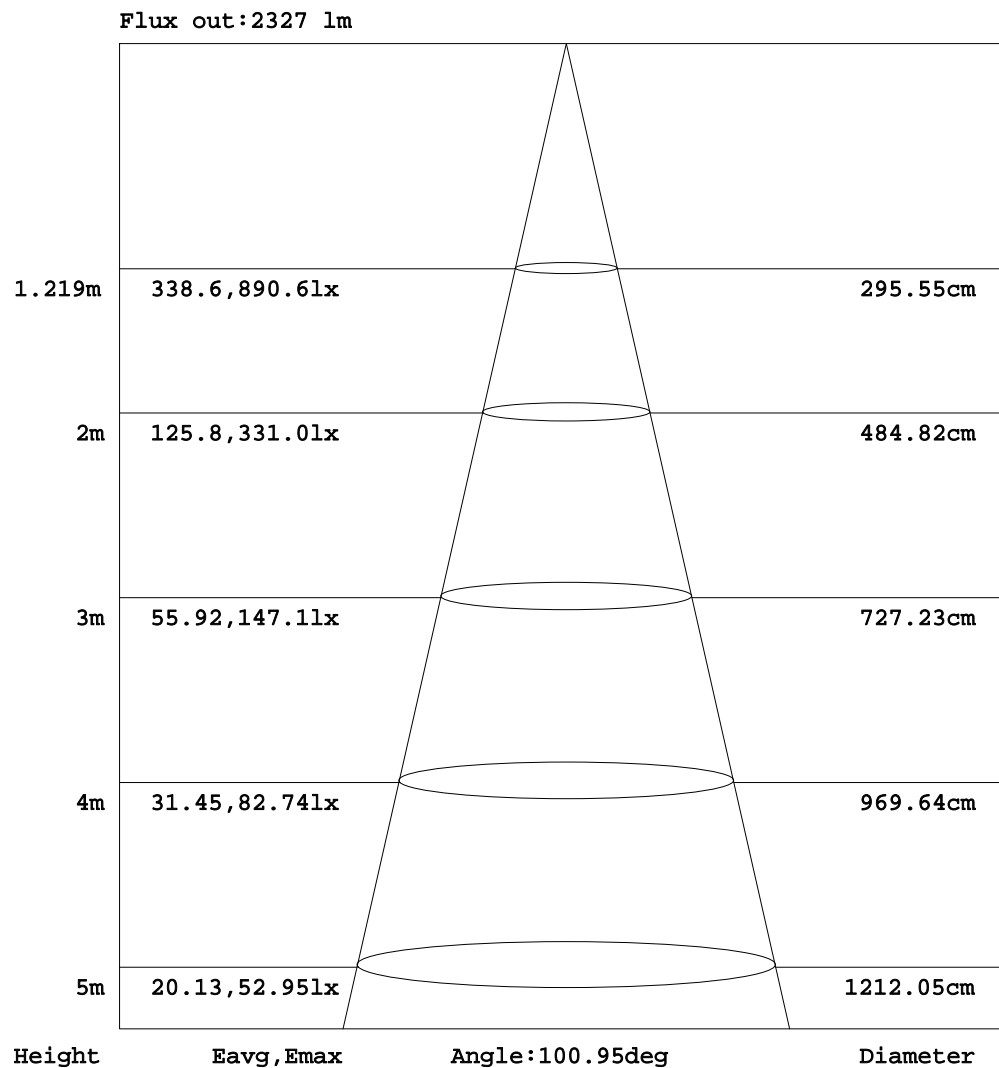


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

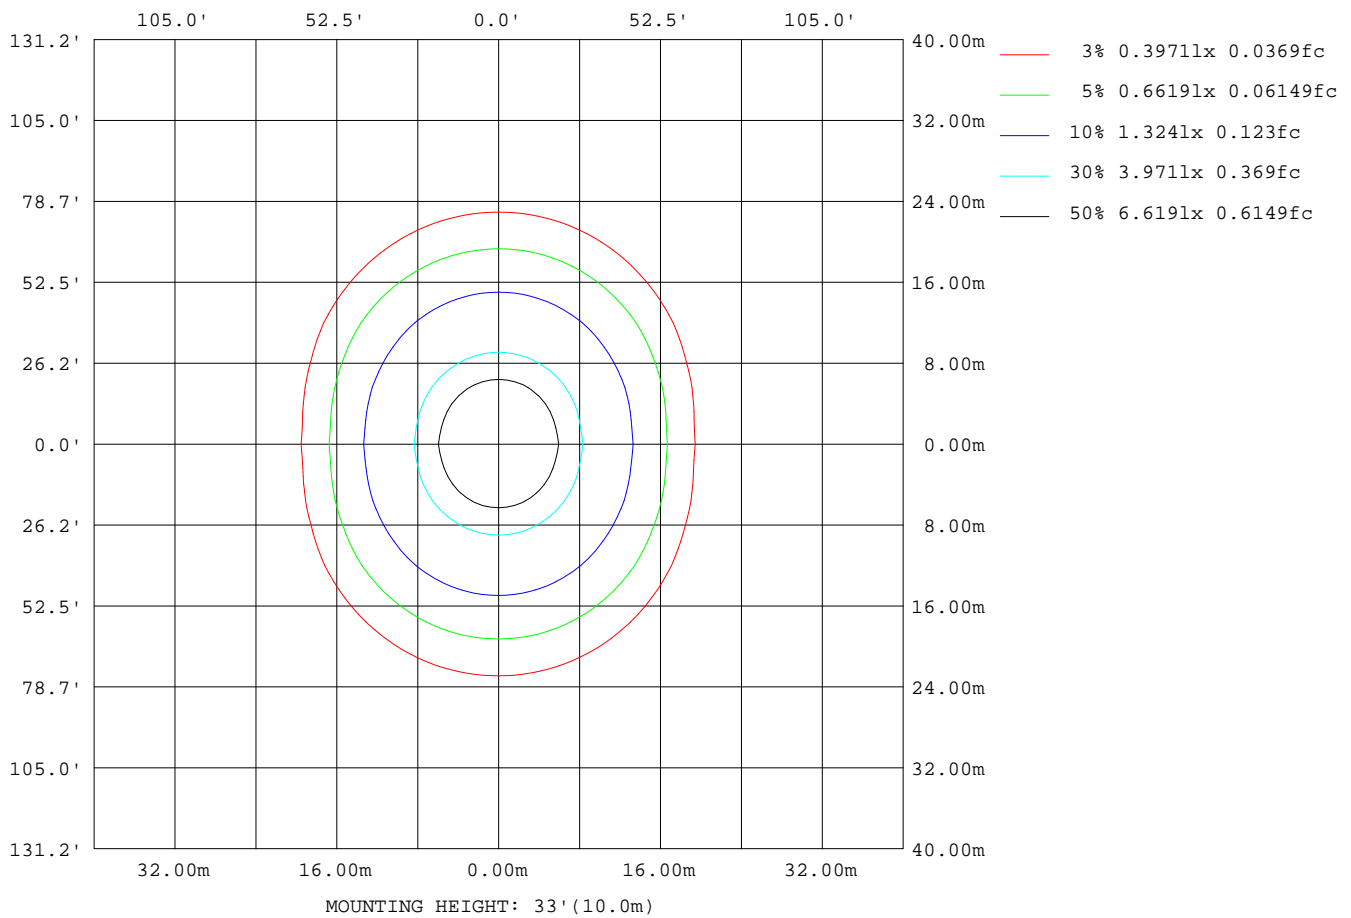

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity: 65.0%
 Test Distance: 8.900m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	2950
L_0~180(75)av	2428
L_0~180(85)av	1665
L_90~270(65)av	5064
L_90~270(75)av	6332
L_90~270(85)av	13897
L_45(65)av	4194
L_45(75)av	4858
L_45(85)av	9571

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
 Humidity:65.0%
 Test Distance:8.900m [K=1.0000]
 Remarks:

Planar Illuminance Curve

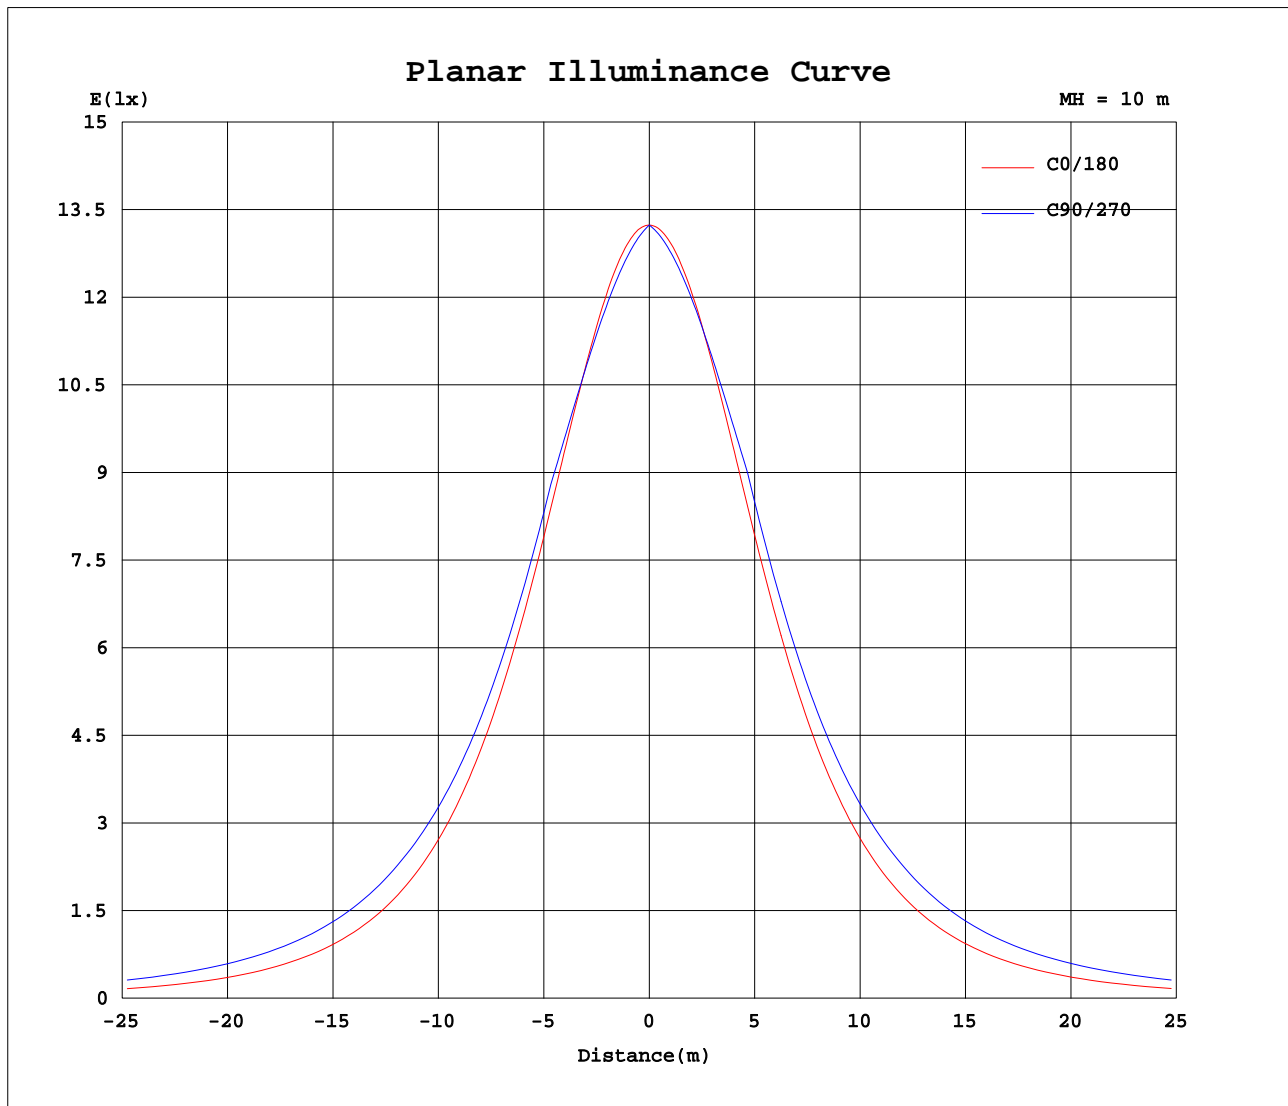

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-06-16

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity: 65.0%
Test Distance: 8.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

Table--1

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-06-16

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.900m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

Table--2

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-06-16

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.900m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

UNIT: cd

[illegible]

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.900m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.2211A P:26.55W PF:0.9971 Lamp Flux:4061.76x1 lm		
NAME: MLSN4-28/D10/U/40	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1182*66*14mm	PROTECTION ANGLE:

Table--4

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-06-16

```

Range: 0 - 90DEG
Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.290
Humidity:65.0%
Test Distance:8.900m [K=1.0000]
Remarks:

```