

Operation Instruction - JBOX

WARNING:

To reduce the risk of personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included.

Before installing, servicing or performing routine maintenance on this equipment, follow these general precautions.

Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician. If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

Turn off electrical power at fuse or circuit breaker before wiring fixture to the power supply. All connections should be capped with UL approved wire connectors.

Keep away from any corrosive substance.

Use a dry cloth when cleaning fixture.

Not suitable for use in wet locations.

“Class 1 wiring” for dimming wire.

Installation:

- (1). Remove the screw and the wiring box cover from the back side of the luminaire. (Fig. 1)

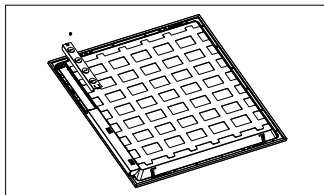


Fig. 1

- (2). Place the j-box accessory where the cover was removed in step 1.(Fig. 2)

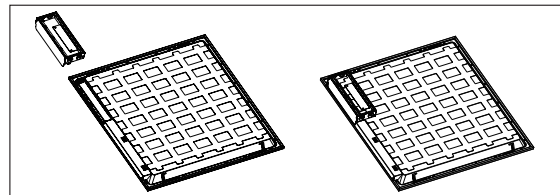


Fig. 2

- (3). Secure the accessory with the included screw. (Fig. 3)

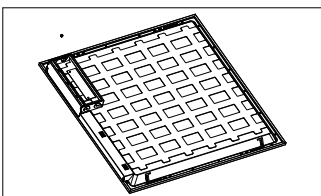


Fig. 3

- (4). Install the cover on the j-box accessory. (Fig. 4)

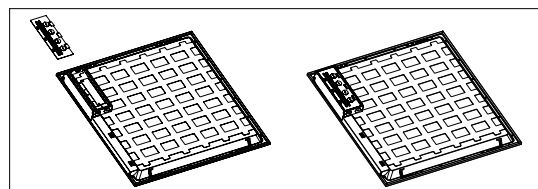


Fig. 4